



# Product catalogue




AUGUST 2026

# It's **more** than a roof

It's a Marley Solar Roof System.



LEARN MORE

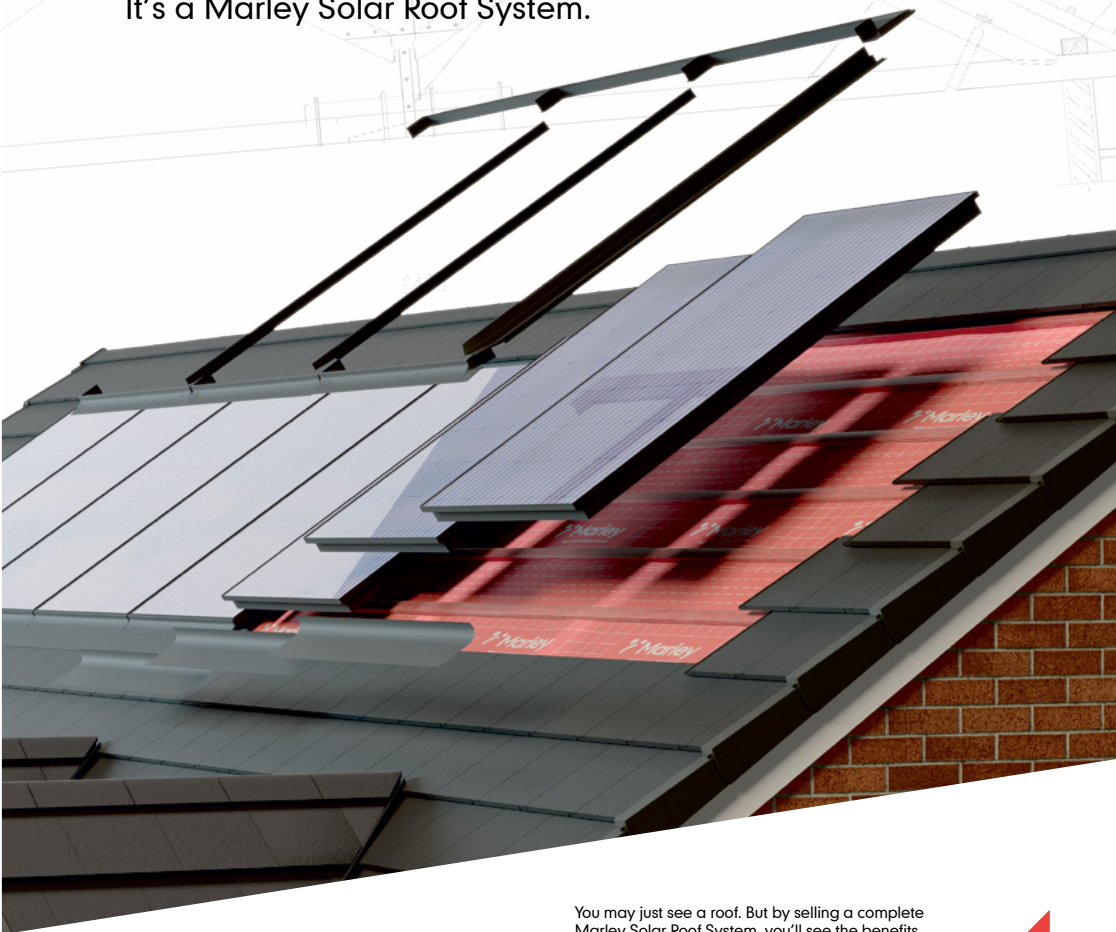

You may just see a roof. But by selling a complete Marley Solar Roof System, you'll see the benefits of stocking all products from a single manufacturer, whilst making the most of the growing demand for roof integrated solar panels.

It's more than a roof.



[marley.co.uk](http://marley.co.uk)

**15  
YEAR**

MARLEY ROOF  
SYSTEM WARRANTY

FIND OUT MORE  [marley.co.uk](http://marley.co.uk)

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

We want to make your project, or that of your client, as straightforward and successful as possible, so we're on hand to offer practical, experienced support in a range of useful ways.

This can be delivering urgent samples where and when they're needed, providing products that help you achieve an A+ rating and gain credits for your buildings, supplying bespoke fixing specifications, offering complete dry fixed ventilation solutions and much more.

In short, we're here to support you in any way we can and we're always happy to take some of the load off your shoulders.

Trust Marley to take the hassle out of roofing. If you ever need advice on any roofing related issue, you can rely on our team to give you a helping hand.



**Find a stockist**  
visit [marley.co.uk/stockists](http://marley.co.uk/stockists)



**Find an installer**  
visit [marley.co.uk/installers](http://marley.co.uk/installers)



All factories certified  
to ISO 9001, ISO 14001,  
OHSAS 45001



## CONTENTS

- 4 THE MARLEY ROOF SYSTEM
- 6 JB RED BATTENS
- 8 BATTENS
- 9 UNIVERSAL UNDERLAYS
- 10 PRODUCT SELECTOR
- 12 SOLAR AND RENEWABLES
- 16 CLAY PLAIN TILES AND FITTINGS
- 28 CLAY PANTILES AND FITTINGS
- 30 CONCRETE TILES AND FITTINGS
- 47 DRY FIX & VENTILATION SYSTEMS
- 60 DRY FIX & VENTILATION  
SYSTEM SELECTOR
- 62 FIXINGS
- 65 SHINGLES AND SHAKES
- 68 MARLEY WEATHERBOARD
- 70 HERE TO HELP
- 72 MINIMUM ORDER QUANTITIES
- 74 MANUFACTURING & STOCKING  
LOCATIONS



# Tell me more

Call 01283 722588  
Email [info@marley.co.uk](mailto:info@marley.co.uk)  
Or visit [marley.co.uk](http://marley.co.uk)

FIND OUT MORE  [marley.co.uk](http://marley.co.uk)

# THE MARLEY ROOF SYSTEM

We offer the most comprehensive roof system on the market, covered by a 15 year warranty.

Our dry fix, ventilation and solar solutions are a key part of our roof system, enabling flexibility in design and detailing; offering weatherproofing, security and refined aesthetics, as well as providing excellent levels of ventilation.

## 01 DRY RIDGE SYSTEMS

Universal RidgeFast system  
(page 53)

Ventilated dry ridge system  
(page 53)

Dry mono ridge system  
(page 54)

## 02 RIDGE VENT TERMINALS

(page 54)

## 03 DRY VERGE SYSTEMS

Universal dry verge system  
(page 49)

Edgemere dry verge system  
(page 49)

Ashmore dry verge system  
(page 50)

Continuous dry verge system  
(page 50)

Cloak verge systems (page 51)

## 04 EAVES SYSTEMS

25mm eaves vent system

10mm eaves vent system

(page 48)


## 05 DRY HIP SYSTEMS

Universal HipFast system  
(page 52)


Dry hip system (page 52)

## 06 DRY VALLEY SYSTEM

Universal dry valley system  
(page 51)

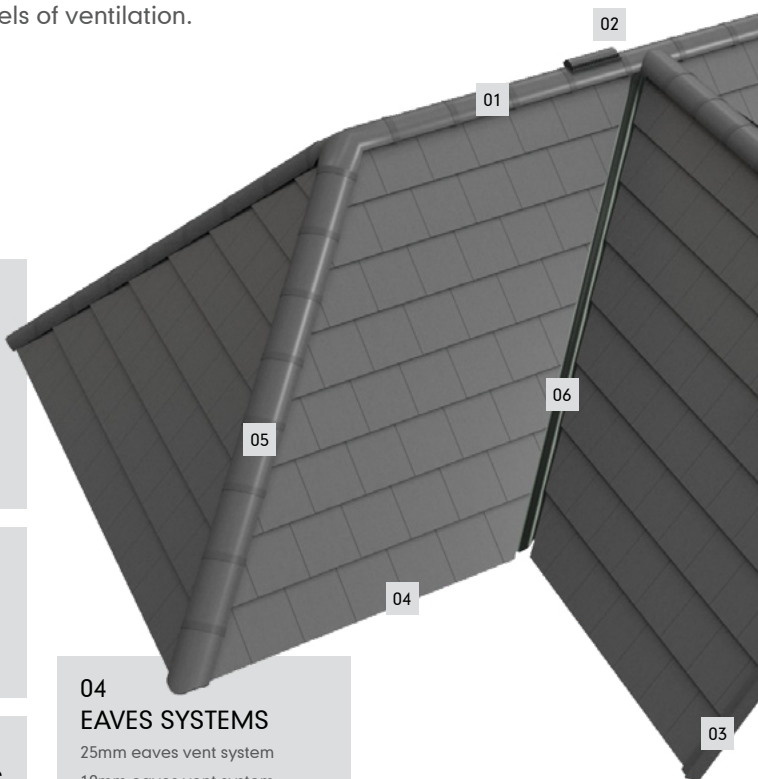



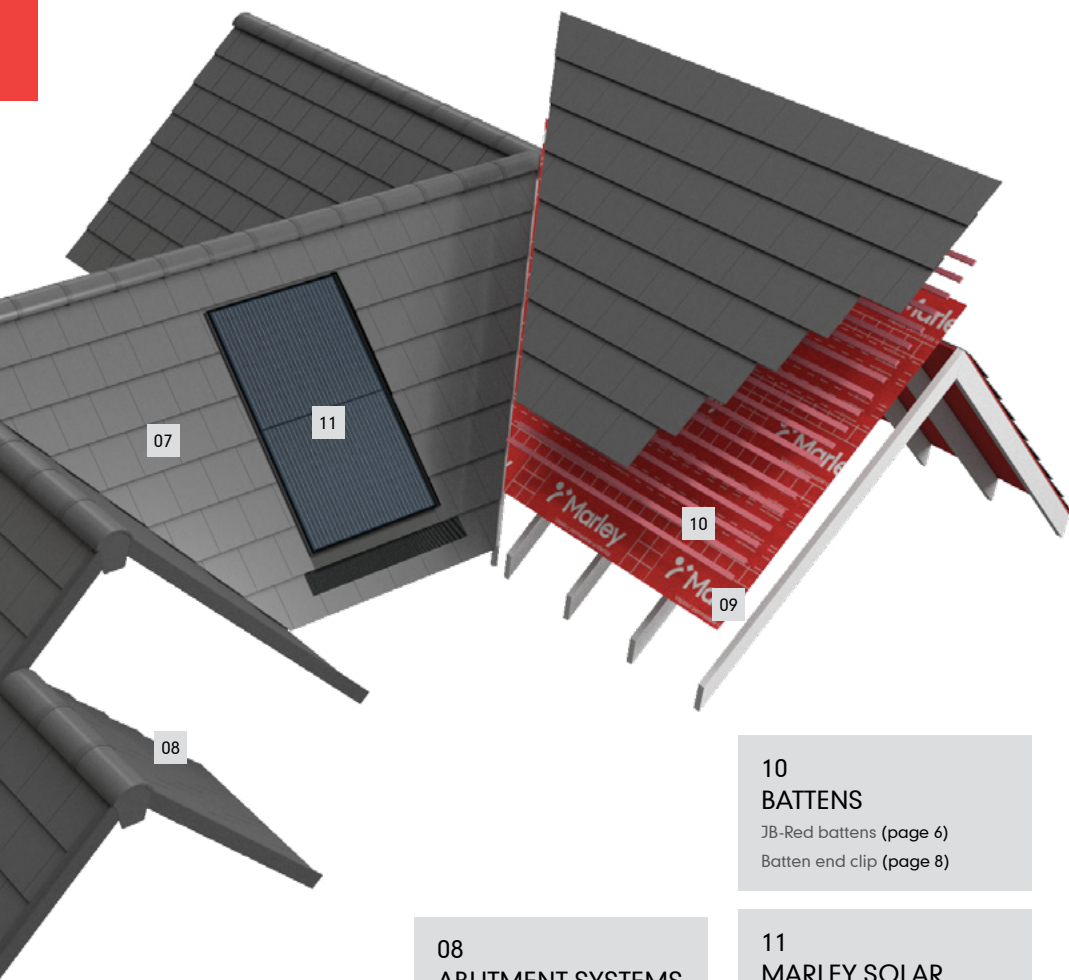

## 07 ROOF SLOPE SYSTEMS

Universal tile vent and contour vent terminals (page 57)  
Tile ventilation terminals (page 58)  
Contour and in-line vents (page 58)

## 08 ABUTMENT SYSTEMS

Top abutment ventilation system (page 55)  
Dry fix soakers (page 55)  
Lead replacement roll (page 56)

## 09 UNDERLAYS

Universal vapour permeable  
Universal non-breathable (page 9)

## 10 BATTENS

JB-Red battens (page 6)  
Batten end clip (page 8)

## 11 MARLEY SOLAR RENEWABLES

A range of PV solar tiles fittings, batteries, inverters and other accessories to provide complete renewable energy systems from roof to road.  
(pages 12-15)

### ALSO AVAILABLE:

GRP bonding gutters (page 56)  
Slate accessories (page 59)

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

# JB RED BATTENS



Only battens that have been pre or factory graded to BS 5534 can be called or used as 'Roofing Battens'.


JB Red completely meets the BS 5534 and NHBC requirements for fully graded roofing battens and it is the only UK factory graded roof batten certified by the BBA (Certificate 19/5668). The battens are exceptionally strong and have full chain of custody certification and JB Red was the first roofing batten to achieve CCPI verification.

Its distinctive red colour means that it is highly visible on site, therefore Local Authority Building Control, NHBC and other inspectors can see that high quality, pre-graded and compliant battens have been used.

JB Red is manufactured using a state of the art, high speed camera and laser grading machine to ensure consistent levels of size and quality.

JB Red is Kopper's MicroPro® treated and carries a 60 year life expectancy against attack by wood rotting fungi and insects.



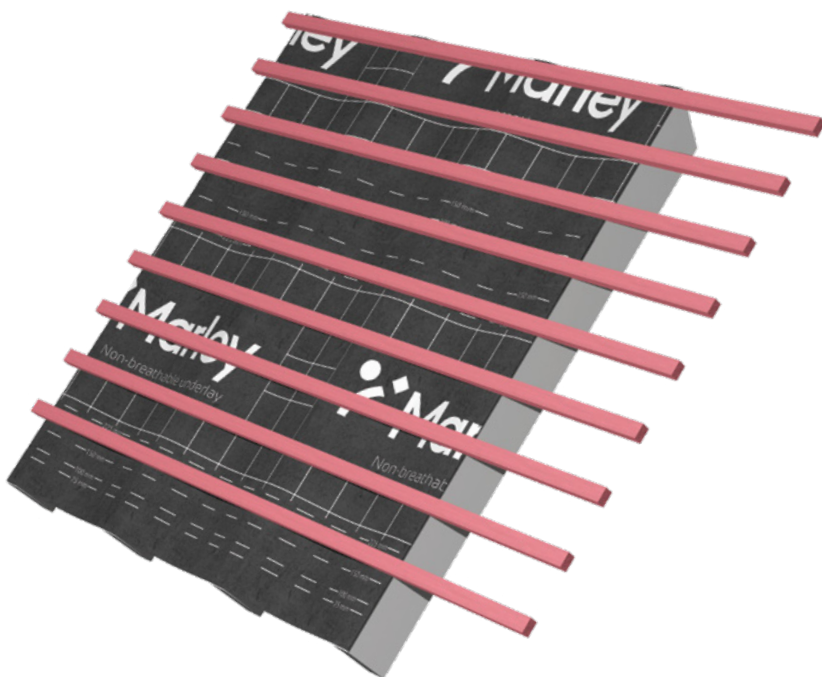


## BENEFITS OF JB RED

- ▲ Pre-graded to all the size and strength requirements of BS 5534 for roofing battens. No further grading is required.
- ▲ Manufactured from slow grown, high grade timber and marked according to BS 5534 showing supplier name, origin/species, grade and size
- ▲ Only kiln dried sideboard timber is used to ensure stability and dimensional accuracy
- ▲ Reduced wastage through state of the art mechanical grading
- ▲ The product and process are UKAS third party assessed by the BBA with a BBA Agrément certificate (19/5668)
- ▲ JB Red is CCPI verified (001500013/1025)
- ▲ Treated to BS 8417 Usage Class 2, using Koppers MicroPro® with a unique red colour
- ▲ 60 year life expectancy against insect attack and wood rotting fungi (when installed correctly in accordance with the requirements of Usage Class 2)

### JB RED BATTEN SIZES

25mm x 38mm, 25mm x 50mm, 38mm x 50mm,  
50mm x 50mm

# BATTENS

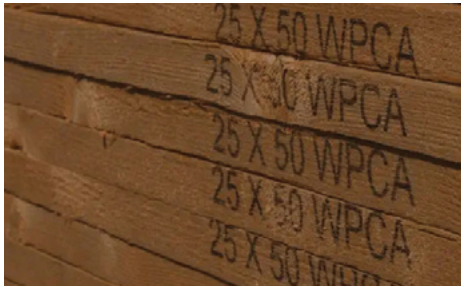

## TYPE A BROWN BATTENS

Type A Brown is a range of traditional standard quality, sawn timber, treated with Kopper MircoPro® brown treatment. Suitable for use as counter battens and for all internal applications.

### TYPE A BROWN BATTEN SIZES

19mm x 38mm, 25mm x 38mm, 25mm x 50mm

## COUNTER BATTENS

Marley counter battens are for matching in with existing battens or when used over wider rafter centres. Available in a selection of sizes and preservative treated.


### COUNTERBATTEN SIZES

6mm x 25mm, 10mm x 38mm

## BATTEN END CLIPS

These are for use with all dry verge units. Easily fitted to the batten end, they provide easy, fast and positive fixing of dry verge units to the batten end.

Compliant with BS 8612.  
Code 30214.



## JB SPECIALTY

Marley offers a full range of roofing timbers, for use above truss or rafter level – all of which are preservative treated.



Lead roll



Corner to corner



Feather edge/firring

### SIZES

- 50mm x 50mm Corner to corner
- 50mm x 50mm Firring
- 50mm x 50mm Lead roll
- 75mm x 75mm King roll

## LARGE SECTION ROOFING, COUNTER AND NON-STANDARD BATTENS


Available in a selection of sizes and preservative treated.

### SIZES

38mm x 50mm, 47mm x 50mm


# UNIVERSAL UNDERLAYS

Marley Universal Vapour Permeable and Non-Permeable underlays are high performance roof membranes which are zone 1-5 compliant, in accordance with BS 5534.




## UNIVERSAL 170 VAPOUR PERMEABLE UNDERLAY

- ▲ Vapour permeable
- ▲ High tensile and tear strength
- ▲ Clean and easy to handle
- ▲ Durable
- ▲ UV resistant
- ▲ BBA approved – certificate no. 19/5678
- ▲ Integrated tape for sealing laps
- ▲ Guidance lines for minimum laps
- ▲ Suitable for vertical applications
- ▲ Fabric weight 170g/m<sup>2</sup>



## UNIVERSAL NON-PERMEABLE UNDERLAY

- ▲ Non-permeable
- ▲ High tensile and tear strength
- ▲ Clean and easy to handle
- ▲ Durable
- ▲ UV resistant
- ▲ BBA approved – certificate no. 19/5673
- ▲ Lightweight alternative to traditional IF
- ▲ Integrated tape for sealing laps
- ▲ Guidance lines for minimum laps
- ▲ Fabric weight 116g/m<sup>2</sup>



## UNIVERSAL 125 VAPOUR PERMEABLE UNDERLAY

- ▲ Vapour permeable
- ▲ Integrated tape for sealing laps
- ▲ Excellent resistance to water penetration
- ▲ Clean and easy to handle
- ▲ For roof applications
- ▲ Durable
- ▲ UV resistant
- ▲ Guidance lines for minimum laps
- ▲ Fabric weight 125g/m<sup>2</sup>

# PRODUCT SELECTOR


## MARLEY SOLARTILE® & RENEWABLES



445



ARCBOX



SOLAR KITS



RENEWABLES

|            |                                 |                            |                        |                                |
|------------|---------------------------------|----------------------------|------------------------|--------------------------------|
| Features   | High output<br>Sleek aesthetics | Making solar<br>even safer | Comprehensive<br>range | Integrated energy<br>solutions |
| Size       | 1134 x 1722mm                   | n/a                        | n/a                    | n/a                            |
| Min. pitch | 20°                             | n/a                        | n/a                    | n/a                            |
| Max. pitch | 60°                             | n/a                        | n/a                    | n/a                            |
| Peak power | 445Wp                           | n/a                        | n/a                    | n/a                            |
| Page       | 13                              | 14                         | 14                     | 15                             |

## CLAY PLAIN TILES



HAWKINS

ACME SINGLE  
CAMBERACME SINGLE  
CAMBER HERITAGE

CANTERBURY

|                |                               |                               |                               |                           |
|----------------|-------------------------------|-------------------------------|-------------------------------|---------------------------|
| Features       | Machine-made<br>Single camber | Machine-made<br>Single camber | Machine-made<br>Single camber | Handmade<br>Single camber |
| Size           | 265 x 165mm                   | 265 x 165mm                   | 265 x 165mm                   | 265 x 165mm               |
| Min. pitch     | 30°                           | 30°                           | 30°                           | 40°                       |
| Max. pitch     | 90°                           | 90°                           | 90°                           | 90°                       |
| No. of colours | 5                             | 8                             | 3                             | 1                         |
| Page           | 17                            | 18                            | 20                            | 22                        |

## CLAY PANTILES



LINCOLN

## SHINGLES & SHAKES



SHINGLES



SHAKES

## CLADDING




WEATHERBOARD

|             |                            |             |            |                                  |
|-------------|----------------------------|-------------|------------|----------------------------------|
| Features    | Clay pantile<br>Open gauge | Machine-cut | Hand split | Durable fibre<br>cement cladding |
| Size        | 375 x 250mm                | Various     | Various    | 3600 x 200mm                     |
| Min. Pitch  | 15°                        | 14°         | 20°        | n/a                              |
| Max. Pitch  | 70°                        | 90°         | 90°        | n/a                              |
| No. Colours | 2                          | 1           | 1          | 5                                |
| Page        | 29                         | 66          | 67         | 68                               |

## CONCRETE TILES



PLAIN



ASHMORE



EDGEMERE



DUO EDGEMERE



RIVEN EDGEMERE

|                |              |                                |                                                          |                                                       |                                         |
|----------------|--------------|--------------------------------|----------------------------------------------------------|-------------------------------------------------------|-----------------------------------------|
| Features       | Cross camber | Interlocking double plain tile | Thin leading edge<br>Cost-effective alternative to slate | Thin leading edge<br>Replicates smaller format slates | Thin leading edge<br>Randomised texture |
| Size           | 267 x 168mm  | 267 x 333mm                    | 420 x 330mm                                              | 420 x 330mm                                           | 420 x 330mm                             |
| Min. pitch     | 35°          | 22.5°                          | 17.5°                                                    | 17.5°                                                 | 17.5°                                   |
| Max. pitch     | 90°          | 90°                            | 90°                                                      | 90°                                                   | 90°                                     |
| No. of colours | 8            | 3                              | 4                                                        | 4                                                     | 2                                       |
| Page           | 31           | 32                             | 33                                                       | 34                                                    | 35                                      |



MODERN



DUO MODERN



MENDIP




MENDIP 12.5



LUDLOW MAJOR

|                |                 |                                                     |                |                             |                                                 |
|----------------|-----------------|-----------------------------------------------------|----------------|-----------------------------|-------------------------------------------------|
| Features       | Flat appearance | Flat appearance<br>Replicates smaller format slates | Double pantile | Double pantile<br>Low pitch | Simple, strong lines<br>Ideal for refurbishment |
| Size           | 420 x 330mm     | 420 x 330mm                                         | 420 x 330mm    | 420 x 330mm                 | 420 x 330mm                                     |
| Min. pitch     | 17.5° (Smooth)  | 17.5° (Smooth)                                      | 15° (Smooth)   | 12.5°*                      | 22.5° (Smooth)                                  |
| Max. pitch     | 90°             | 90°                                                 | 90°            | 44°                         | 90°                                             |
| No. of colours | 6               | 2                                                   | 7              | 3                           | 6                                               |
| Page           | 36              | 37                                                  | 38             | 39                          | 40                                              |



LUDLOW PLUS



DOUBLE ROMAN



WESSEX



ANGLIA

|                |                                         |                     |                                          |                                          |
|----------------|-----------------------------------------|---------------------|------------------------------------------|------------------------------------------|
| Features       | Small format<br>Ideal for refurbishment | Traditional profile | Clean lines<br>Water shedding efficiency | Bullnose leading edge<br>Classic pantile |
| Size           | 387 x 229mm                             | 420 x 330mm         | 420 x 330mm                              | 387 x 230mm                              |
| Min. pitch     | 22.5° (Smooth)                          | 22.5° (Smooth)      | 15°                                      | 25° (Smooth)                             |
| Max. pitch     | 90°                                     | 90°                 | 44°                                      | 90°                                      |
| No. of colours | 5                                       | 6                   | 2                                        | 3                                        |
| Page           | 41                                      | 42                  | 43                                       | 44                                       |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



# Solar and renewables

# MARLEY SOLARTILE® 445Wp

Designed to form an integral part of the fabric of the roof, this N-Type TOPCon photovoltaic panel delivers a peak power output of 445Wp, along with sleek aesthetics and long-lasting, maintenance-free performance.



## TECHNICAL DATA


|                                  |                                                                                                                          |
|----------------------------------|--------------------------------------------------------------------------------------------------------------------------|
| Size                             | 1134mm wide x 1722mm high                                                                                                |
| Aperture area                    | 1.885m²                                                                                                                  |
| Minimum pitch*                   | 20°                                                                                                                      |
| Maximum pitch                    | 60°                                                                                                                      |
| Body thickness                   | 70mm                                                                                                                     |
| Weight                           | 28.5kg                                                                                                                   |
| Static roof loading              | 14.5kg/m² (distributed)                                                                                                  |
| Characteristic wind resistance   | 4.65kPa                                                                                                                  |
| Ultimate design load*            | 4.65kPa                                                                                                                  |
| Positive design load (IEC 61215) | 5.4kPa                                                                                                                   |
| Fire rating EN 13501-5           | B <sub>ROOF</sub> (T1, T2, T3, T4)                                                                                       |
| Authority                        | IEC 61215, 61730, TUV, MCS05, MCS12                                                                                      |
| Compatible roof coverings        | All Marley concrete and clay plain, and interlocking tiles. Also compatible with tiles and slates of other manufacturers |

## ELECTRICAL DATA

|                                   |                      |
|-----------------------------------|----------------------|
| Model                             | MAPV-445AG-M10       |
| Peak power                        | 445Wp                |
| Efficiency                        | 23.5%                |
| No. of cells                      | 54x2                 |
| Max. power voltage ( $V_{mpp}$ )  | 33.02V               |
| Max. power current ( $I_{mpp}$ )  | 13.48V               |
| Open circuit voltage ( $V_{oc}$ ) | 39.90V               |
| Short circuit current $I_{sc}$ )  | 14.18A               |
| NOCT†                             | 42°C                 |
| Cell type                         | N-Type TOPCon        |
| Power temperature co-efficient    | -0.29%/°C            |
| Current temperature co-efficient  | 0.04%/°C             |
| Voltage temperature co-efficient  | -0.25%/°C            |
| Max. system voltage               | 1000 V <sub>DC</sub> |
| Max. fuse rating                  | 25 A                 |

\* Design resistance to ultimate loads includes a partial material safety factor of 1.0

† Nominal operating cell temperature

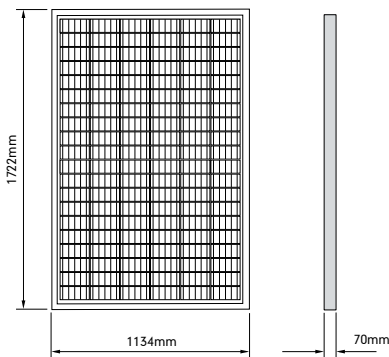

15  
YEAR

15  
YEAR

60  
YEAR

\*MARLEY ROOF SYSTEM WARRANTY

80% EFFICIENCY GUARANTEE

EXPECTED PANEL LIFESPAN

\* Terms and conditions apply


# MARLEY RENEWABLES

The Marley Solar Roof System provides a sleek, integrated solar solution that combines roof security with solar power generation.



## ARCBOX

Making solar even safer. The ArcBox enclosure simply snaps around a DC connector to ensure that, if an arc ever occurs, it is safely contained and doesn't spread to combustible materials in or around the solar installation. The effectiveness of the product has been independently verified by the KIWA fire test laboratory and Loughborough University.

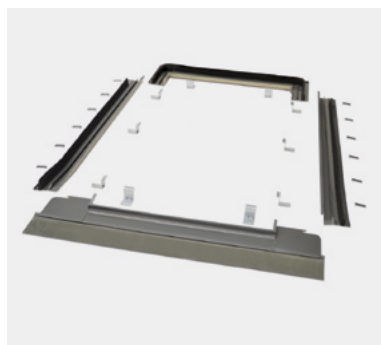

## MARLEY SOLARTILE® KITS

Marley supplies a comprehensive range of fixing/ flashing kits for our SolarTile® to fit varying array layouts. There are also conversion kits to fit around Velux windows and fixing directly to sarking board.







## SOLAR INVERTERS

Marley offers a choice of Solar Inverters to maximise self-consumption of the generated solar energy including Clearline single phase string inverters for residential solar applications from 0.67kWp up to 9.0kWp and compact and efficient ES G2 hybrid inverters for optimised solar energy back-up.



## BATTERY STORAGE

The Lynx Home U Series Battery, with a wide capacity range scalable from 5.4 - 32.4 kWh, has been specially designed for superior performance in residential applications to provide flexibility for self-consumption and back-up applications.



## SOLAR CONFIGURATOR

You can configure your solar array using the Marley Configurator. It will choose the mix of roofing kits required and calculate the kWp output for your roof.

**[marley.co.uk](https://marley.co.uk)**

For battery and inverter compatibility contact our Technical Advisory Service on 01283 722330.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help


## Clay plain tiles and fittings

Hawkins Fired Sienna (T)




FIND OUT MORE [marley.co.uk](https://marley.co.uk)

# HAWKINS



Single cambered (longitudinal), machine-made clay tile, manufactured for over 150 years. This heritage, combined with modern firing techniques, gives a traditional colour range.



## COLOUR AVAILABILITY



**Key**  
(F) Fine sanded finish  
(S) Smooth finish  
(T) Textured finish



## TECHNICAL DATA

|                            |                                                                                 |                                                                         |
|----------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Size of tile               | 265mm x 165mm                                                                   |                                                                         |
| Minimum pitch*             | 30°                                                                             |                                                                         |
| Maximum pitch              | 90°                                                                             |                                                                         |
| Minimum headlap            | 65mm (roof)                                                                     | 35mm (vertical)                                                         |
| Maximum gauge              | 100mm (roof)                                                                    | 115mm (vertical)                                                        |
| Tile thickness             | 11mm (nominal)                                                                  |                                                                         |
| Cover width                | 165mm (nominal)                                                                 |                                                                         |
| Covering capacity (net)    | 60 tiles/m <sup>2</sup> at 100mm gauge (roof)                                   | 53 tiles/m <sup>2</sup> at 115mm gauge (vertical)                       |
| Weight of tiling (approx.) | 64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof)             | 56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical) |
| Battens required (net)     | 10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)                                 | 8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                         |
| Tile nails                 | 38mm x 2.65mm nail                                                              |                                                                         |
| Authority                  | BS EN 1304                                                                      |                                                                         |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles  
Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## PRODUCT INFORMATION

Tile camber  
Single camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†


# ACME SINGLE CAMBER

## STANDARD RANGE


Natural clay, machine-made, single cambered (longitudinal) plain tiles, offering crisp, contemporary lines and the warmth and character of clay at an affordable price.




## COLOUR AVAILABILITY




Red Smooth (S)




Red Sandfaced (F)




Autumn Brindle (S)




Grey Sandfaced (F)




Heather Sandfaced (F)



Heather Blend (F)



Farmhouse Brown  
Sandfaced (F)



Mixed Brindle (S)

### Key

- (F) Fine sandfaced finish  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                 |                                                                         |
|----------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Size of tile               | 265mm x 165mm                                                                   |                                                                         |
| Minimum pitch*             | 30°                                                                             |                                                                         |
| Maximum pitch              | 90°                                                                             |                                                                         |
| Minimum headlap            | 65mm (roof)                                                                     | 35mm (vertical)                                                         |
| Maximum gauge              | 100mm (roof)                                                                    | 115mm (vertical)                                                        |
| Tile thickness             | 11mm (nominal)                                                                  |                                                                         |
| Cover width                | 165mm (nominal)                                                                 |                                                                         |
| Covering capacity (net)    | 60 tiles/m <sup>2</sup> at 100mm gauge (roof)                                   | 53 tiles/m <sup>2</sup> at 115mm gauge (vertical)                       |
| Weight of tiling (approx.) | 64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof)             | 56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical) |
| Battens required (net)     | 10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)                                 | 8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                         |
| Tile nails                 | 38mm x 2.65mm nail                                                              |                                                                         |
| Authority                  | BS EN 1304                                                                      |                                                                         |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.






Mixed Brindle (S)

## PRODUCT INFORMATION

Tile camber  
Single camber



### Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†

## SUSTAINABILITY

✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available



# ACME SINGLE CAMBER

## HERITAGE RANGE

A varied range of traditional clay blends that offer an aged character, unique to every roof.



## COLOUR AVAILABILITY



Key (F) Fine sanded finish

## TECHNICAL DATA

|                            |                                                                                 |                                                                         |
|----------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Size of tile               | 265mm x 165mm                                                                   |                                                                         |
| Minimum pitch*             | 30°                                                                             |                                                                         |
| Maximum pitch              | 90°                                                                             |                                                                         |
| Minimum headlap            | 65mm (roof)                                                                     | 35mm (vertical)                                                         |
| Maximum gauge              | 100mm (roof)                                                                    | 115mm (vertical)                                                        |
| Tile thickness             | 11mm (nominal)                                                                  |                                                                         |
| Cover width                | 165mm (nominal)                                                                 |                                                                         |
| Covering capacity (net)    | 60 tiles/m <sup>2</sup> at 100mm gauge (roof)                                   | 53 tiles/m <sup>2</sup> at 115mm gauge (vertical)                       |
| Weight of tiling (approx.) | 64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof)             | 56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical) |
| Battens required (net)     | 10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)                                 | 8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                         |
| Tile nails                 | 38mm x 2.65mm nail                                                              |                                                                         |
| Authority                  | BS EN 1304                                                                      |                                                                         |


\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.



Weathered (F)

## PRODUCT INFORMATION

Tile camber  
Single camber



### Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†

## SUSTAINABILITY

✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available



# CANTERBURY HANDMADE

True to tradition, a distinctive handmade clay plain tile colour, with a fine sanded finish suitable for roofing and vertical tiling.

## COLOUR AVAILABILITY



Key  
(F) Fine sanded finish

## TECHNICAL DATA

|                            |                                                                                 |                                                                         |
|----------------------------|---------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Size of tile               | 265mm x 165mm                                                                   |                                                                         |
| Minimum pitch*             | 40°                                                                             |                                                                         |
| Maximum pitch              | 90°                                                                             |                                                                         |
| Minimum headlap            | 65mm (roof)                                                                     | 35mm (vertical)                                                         |
| Maximum gauge              | 100mm (roof)                                                                    | 115mm (vertical)                                                        |
| Tile thickness             | 13mm (nominal)                                                                  |                                                                         |
| Cover width                | 165mm (nominal)                                                                 |                                                                         |
| Covering capacity (net)    | 60 tiles/m <sup>2</sup> at 100mm gauge (roof)                                   | 53 tiles/m <sup>2</sup> at 115mm gauge (vertical)                       |
| Weight of tiling (approx.) | 74kg/m <sup>2</sup> (0.73 kN/m <sup>2</sup> ) at 100mm gauge (roof)             | 66kg/m <sup>2</sup> (0.64 kN/m <sup>2</sup> ) at 115mm gauge (vertical) |
| Battens required (net)     | 10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)                                 | 8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                         |
| Tile nails                 | 38mm x 2.65mm nail                                                              |                                                                         |
| Authority                  | BS EN 1304                                                                      |                                                                         |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles  
Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## PRODUCT INFORMATION

Tile camber  
Single camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help








Loxleigh (F)



# CLAY FITTINGS & ACCESSORIES






Important note: All the fittings shown on these pages can be used with clay plain tiles.

## PLAIN TILE FITTINGS

|                  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |
|------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                  |  |  |  |  |  |
| Description      | Tile-and-a-half                                                                   | Eaves/top tile                                                                    | Creasing tiles§                                                                   | Cloaked verge tiles*                                                              | External angle tiles**                                                             |
| Angles available | n/a                                                                               | n/a                                                                               | n/a                                                                               | n/a                                                                               | 90°, 135°                                                                          |





## FEATURE TILES

Available in a range of colours, please contact customer services for more information.

|             |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |
|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|
|             |  |  |  |  |  |  |
| Description | Club feature tile*                                                                | RH club tile-and-a-half*                                                          | LH club tile-and-a-half*                                                          | Bullnose feature tile*                                                            | RH bullnose tile-and-a-half*                                                      | LH bullnose tile-and-a-half*                                                      |

## HIPS AND VALLEYS

Mortar bedded security hip kits are available for third round ridges (see page 64)

|                  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                  |  |  |  |  |
| Description      | Granny hip                                                                          | Semi bonnet hip                                                                     | Arris hip**                                                                         | Valley**                                                                            |
| Angles available | n/a                                                                                 | n/a                                                                                 | 130°, 135°, 145°                                                                    | 130°, 135°, 140°, 145°, 150°                                                        |
| Pitch range      | 40-60°                                                                              | 30-40°                                                                              | 30-45°                                                                              | 30-50°                                                                              |

\* Made to order (subject to minimum order quantities)



\*\* Some colours and angles made to order (subject to minimum order quantities)

§ Available in Red Smooth.

Note: All measurements in mm.

## VENTILATION

Available in a range of bases with real clay tile slips on the visible edge (2 tiles wide). The clay tile vent provides a net ventilation area of 10,000mm<sup>2</sup> per vent. Suitable for natural, mechanical or soil pipe ventilation.



Description




Clay in-line tile vent

Tile vent adaptor

Flexible pipe

## DECORATIVE RIDGES

Mortar bedded security ridge kits are available (see page 64)



Description

Club crested  
ridge

Cocks comb  
crested ridge

Two hole  
crested ridge

Angles available

90°, 105°

90°, 105°

90°, 105°

Colours available





Red Smooth

Red Smooth

Red Smooth

## CLAY FINIALS

Available in a range of colours and angles. Mortar bedded security ridge kits are available (see page 64)




Description

Ball top finial\*  
Red Smooth

Ball top finial\*  
Red Smooth 90°, 105°  
Slate black 90°, 105°

Fleur-de-Lys gable\*  
Red Smooth

Fleur-de-Lys finial\*  
Red Smooth 90°, 105°  
Slate black 90°, 105°



Description

Scroll finial\*  
Red Smooth

Angle finial\*  
Red Smooth 90°, 105°  
Slate black 90°, 105°

\* Made to order (subject to minimum order quantities)





Note: All measurements in mm.





# CLAY FITTINGS & ACCESSORIES




Important note: All the fittings shown on these pages can be used with clay plain tiles.

## RIDGE AND HIP TILES

Mortar bedded security ridge kits are available (see page 64)

|                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |
|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                   |  |  |  |  |
| Description       | Half round ridge                                                                  | Half round ridge hip end*                                                         | Half round ridge stop end*                                                        | Mono ridge*                                                                        |
| Colours available | All colours                                                                       | All colours                                                                       | All colours                                                                       | All colours                                                                        |
| Pitch range‡      | 30-60°                                                                            | 30-60°                                                                            | 30-60°                                                                            | 30-45°                                                                             |

|                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |
|-------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                   |  |  |  |  |
| Description       | 305mm Angular ridge**                                                             | 305mm Angular ridge stop end*                                                     | 305mm Angular ridge hip end*                                                      | 450mm Angular ridge                                                                |
| Angles available  | 90°, 105°                                                                         | 90°, 105°                                                                         | 90°, 105°                                                                         | 75°, 90°, 105°, 115°, 125°, 135°                                                   |
| Colours available | All colours                                                                       | All colours                                                                       | All colours                                                                       | Red Smooth, Slate Black                                                            |

|                   |                                                                                    |                                                                                    |                                                                                    |
|-------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
|                   |  |  |  |
| Description       | 450mm Angular ridge stop end*                                                      | 450mm Angular ridge hip end*                                                       | 450mm Capped angular ridge                                                         |
| Angles available  | 75°, 90°, 105°, 115°, 125°, 135°                                                   | 75°, 90°, 105°, 115°, 125°, 135°                                                   | 75°, 90°, 105°, 115°, 125°, 135°                                                   |
| Colours available | Red Smooth, Slate Black                                                            | Red Smooth, Slate Black                                                            | Red Smooth, Slate Black, Staffordshire Blue‡                                       |

\* Made to order (subject to minimum order quantities)

\*\* Some colours and angles made to order (subject to minimum order quantities)

‡ Staffordshire Blue made to order





† Angle ridge wing length will vary depending on ridge angle

‡ Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch.  
For further information, please contact our Technical Advisory Service on 01283 722330

Note: All measurements in mm.

## RIDGE AND HIP TILES

Mortar bedded security ridge kits are available (see page 64)



| Description       | 450mm Capped angular ridge hip end*         | 450mm Capped angular ridge stop end*        | Third round hip** | Third round hip end** |
|-------------------|---------------------------------------------|---------------------------------------------|-------------------|-----------------------|
| Angles available  | 75°, 90°, 105°, 115°, 125°, 135°            | 75°, 90°, 105°, 115°, 125°, 135°            | n/a               | n/a                   |
| Colours available | Red Smooth, Slate Black, Staffordshire Blue | Red Smooth, Slate Black, Staffordshire Blue | All colours       | All colours           |
| Pitch range‡      |                                             |                                             | 30-45°            | 30-45°                |

\* Made to order (subject to minimum order quantities)

\*\* Some colours and angles made to order (subject to minimum order quantities)

† Angle ridge wing length will vary depending on ridge angle

‡ Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

The following dry fix and/or ventilation systems can also be used with clay plain tiles:

- ▲ Universal 10mm and 25mm eaves vent systems (page 48)
- ▲ Continuous dry verge (page 50)
- ▲ Universal plain tile vent (page 57)
- ▲ Universal GRP valley (page 51)
- ▲ Universal RidgeFast system# (page 53)
- ▲ Universal HipFast system# (page 52)

# Subject to ridge/hip fitting.



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay pantiles  
and fittings


Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

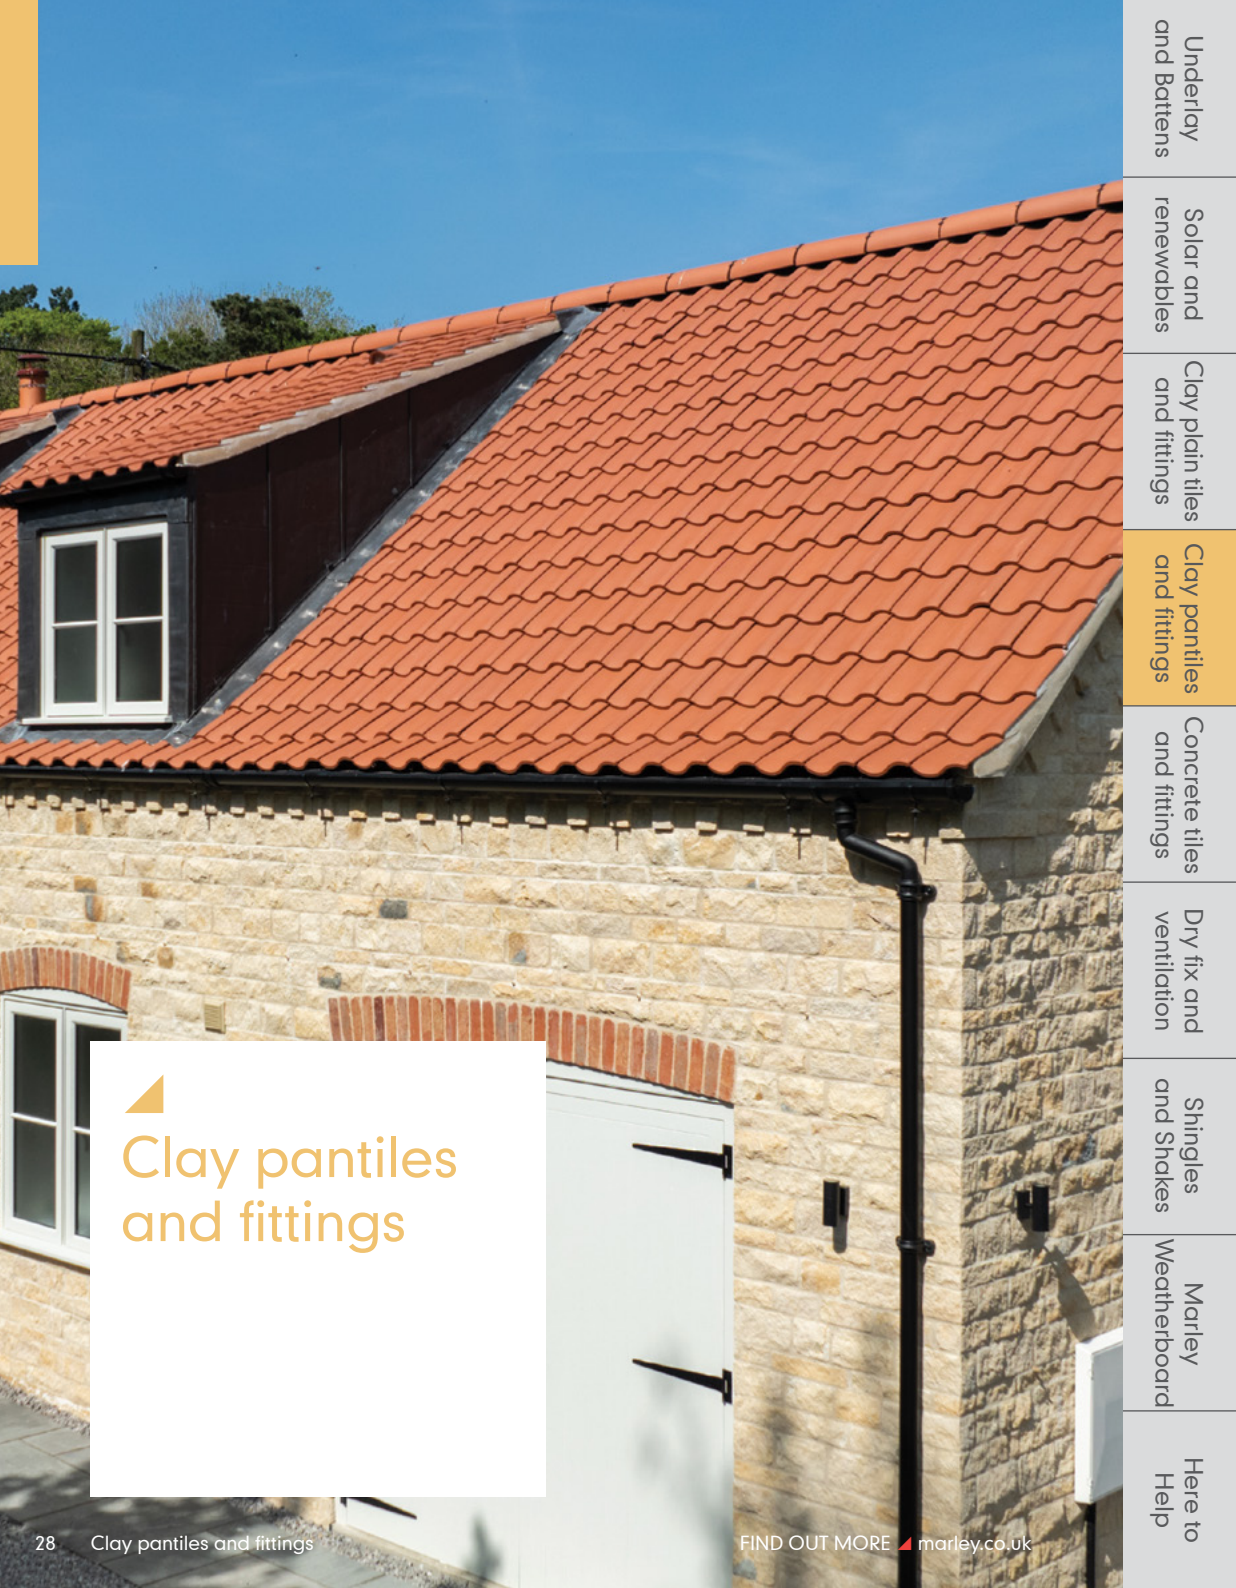

## Clay pantiles and fittings

# LINCOLN

Clay interlocking pantiles combining the bold and beautiful curves of traditional clay pantiles with all the installation simplicity and speed required for today's roofs.

lowpitch



## COLOUR AVAILABILITY



Rustic Red (S)



Red Smooth (S)

Key (S) Smooth finish

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay tiles  
Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified

## TECHNICAL DATA

|                            |                                                                                                                                                 |                                                                   |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|
| Size of tile               | 375mm x 250mm                                                                                                                                   |                                                                   |
| Minimum pitch*             | 15° (100mm headlap)                                                                                                                             | 22.5° (75mm headlap)                                              |
| Maximum pitch              | 70°                                                                                                                                             |                                                                   |
| Minimum headlap            | 75mm                                                                                                                                            |                                                                   |
| Maximum gauge              | 300mm                                                                                                                                           |                                                                   |
| Tile thickness             | 15mm (nominal)                                                                                                                                  |                                                                   |
| Cover width                | 224mm (nominal)                                                                                                                                 |                                                                   |
| Covering capacity (net)    | 14.9 tiles/m <sup>2</sup> at 75mm headlap                                                                                                       | 16.2 tiles/m <sup>2</sup> at 100mm headlap                        |
| Weight of tiling (approx.) | 46.2kg/m <sup>2</sup> (0.453 kN/m <sup>2</sup> ) at 75mm headlap                                                                                | 50.2kg/m <sup>2</sup> (0.462 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 3.4 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                        | 3.7 lin.m/m <sup>2</sup> at 100mm headlap (roof)                  |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres |                                                                   |
| Tile nails                 | 38mm x 3.35mm nail                                                                                                                              |                                                                   |
| Authority                  | BS EN 1304                                                                                                                                      |                                                                   |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## LINCOLN FITTINGS

Available in colours to match main tiles.



Description

450mm clay half round ridge



450mm half round block end ridge\*\*



450mm third round hip



305mm third round hip stop end\*\*



Description

Contour vent tile



Dentil slip

\*\* Made to order, subject to lead time.



Environmental Product Declaration available





Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

## Concrete tiles and fittings

# PLAIN

The authentic single camber design of the Marley concrete plain tile gives it an attractive look to match its outstanding versatility.



## COLOUR AVAILABILITY




Mosborough Red (S)



Natural Red (F)



Old English Dark Red (S)




Dark Red (G)



Smooth Brown (S)



Antique Brown (G)



Smooth Grey (S)



Anthracite (S)

Key (F) Fine sanded finish (G) Granular finish (S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                 |                                                |
|----------------------------|---------------------------------------------------------------------------------|------------------------------------------------|
| Size of tile               | 267mm x 168mm                                                                   |                                                |
| Minimum pitch*             | 35°                                                                             |                                                |
| Maximum pitch              | 90°                                                                             |                                                |
| Minimum headlap            | 65mm (roof)                                                                     | 37.5mm (vertical)                              |
| Maximum gauge              | 100mm (roof)                                                                    | 115mm (vertical)                               |
| Tile thickness             | 12mm (nominal)                                                                  |                                                |
| Cover width                | 168mm (nominal)                                                                 |                                                |
| Covering capacity (net)    | 60 tiles/m² at 100mm gauge (roof)                                               | 53 tiles/m² at 115mm gauge (vertical)          |
| Weight of tiling (approx.) | 73.8kg/m² (0.72 kN/m²) at 100mm gauge (roof)                                    | 58kg/m² (0.57 kN/m²) at 115mm gauge (vertical) |
| Battens required (net)     | 10.0 lin.m/m² at 100mm gauge (roof)                                             | 8.7 lin.m/m² at 115mm gauge (vertical)         |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                |
| Tile nails                 | 38mm x 2.65mm nail                                                              |                                                |
| Authority                  | BS EN 490                                                                       |                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete plain tiles  
Element Refs: 812410017, 812410050, 812410064)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## PLAIN TILE FITTINGS

Available in all colours to match main tiles.




Plain tile-and-a-half




Plain eaves/top tile

# ASHMORE

A single lap, interlocking double plain tile, with the engineered precision and ease of installation of an interlocking tile.




## COLOUR AVAILABILITY



Smooth Brown (S)



Smooth Grey (S)



Old English Dark Red (S)

Key  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of tile               | 267mm x 333mm                                                                                                                                                      |
| Minimum pitch*             | 25° (77mm headlap)<br>22.5° (92mm headlap)                                                                                                                         |
| Maximum pitch              | 90°                                                                                                                                                                |
| Minimum headlap            | 77mm                                                                                                                                                               |
| Maximum gauge              | 190mm                                                                                                                                                              |
| Tile thickness             | 16mm (nominal)                                                                                                                                                     |
| Cover width                | 302mm (nominal)                                                                                                                                                    |
| Hanging length             | 235mm (nominal)                                                                                                                                                    |
| Covering capacity (net)    | 17.5 tiles/m <sup>2</sup> at 77mm headlap<br>19 tiles/m <sup>2</sup> at 92mm headlap                                                                               |
| Weight of tiling (approx.) | 48kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 77mm headlap<br>52kg/m <sup>2</sup> (0.51 kN/m <sup>2</sup> ) at 92mm headlap                                     |
| Battens required (net)     | 5.3 lin.m/m <sup>2</sup> at 77mm headlap<br>5.8 lin.m/m <sup>2</sup> at 92mm headlap                                                                               |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Tile nails                 | 45mm x 3.35mm nail                                                                                                                                                 |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |
| Authority                  | BS EN 490                                                                                                                                                          |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs:  
812410007, 812410018, 812410049)


✓ BES 6001 Responsible Sourcing certified




Environmental Product Declaration available

## ASHMORE FITTINGS


Available in all colours to match main tiles.




Ashmore three quarter tile (LH)



Ashmore three quarter tile (RH)



Ashmore tile-and-a-half



Ashmore dry verge

Ashmore tiles should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.

Note: All measurements in mm.




# EDGEMERE


A clean and precise slate-like appearance is enhanced by the thin leading edge and the broken bond laying technique.




## COLOUR AVAILABILITY



Smooth Brown (S)



Smooth Grey (S)



Old English Dark  
Red (S)



Anthracite (S)

Key (S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |
| Minimum pitch*             | 22.5° (75mm headlap)<br>17.5° (100mm headlap)                                                                                                                      |
| Maximum pitch              | 90°                                                                                                                                                                |
| Minimum headlap            | 75mm (22.5° and above)<br>100mm (below 22.5°)                                                                                                                      |
| Maximum gauge              | 345mm                                                                                                                                                              |
| Tile thickness             | 18mm (nominal)                                                                                                                                                     |
| Cover width                | 298mm (nominal)                                                                                                                                                    |
| Hanging length             | 395mm (nominal)                                                                                                                                                    |
| Covering capacity (net)    | 9.7 tiles/m <sup>2</sup> at 75mm headlap<br>10.5 tiles/m <sup>2</sup> at 100mm headlap                                                                             |
| Weight of tiling (approx.) | 44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap<br>47.5kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 100mm headlap                                  |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap<br>3.1 lin.m/m <sup>2</sup> at 100mm headlap                                                                              |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Tile nails                 | 45mm x 3.35mm nail                                                                                                                                                 |
| Fixing clips               | Eaves, verge and slate clips                                                                                                                                       |
| Authority                  | BS EN 490                                                                                                                                                          |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## EDGEMERE FITTINGS

Available in all colours to match main tiles.



Edgemere half slate



Edgemere dry verge




Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Purpose made half slates are available and can be formed on site by cutting along the scoreline.

# DUO EDGEMERE

A thin leading edge interlocking slate designed to look like and blend in with small format slates.



## COLOUR AVAILABILITY



Key (S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |
| Minimum pitch*             | 22.5° (75mm headlap)<br>17.5° (100mm headlap)                                                                                                                      |
| Maximum pitch              | 90°                                                                                                                                                                |
| Minimum headlap            | 75mm (22.5° and above)<br>100mm (below 22.5°)                                                                                                                      |
| Maximum gauge              | 345mm                                                                                                                                                              |
| Tile thickness             | 18mm (nominal)                                                                                                                                                     |
| Cover width                | 298mm (nominal)                                                                                                                                                    |
| Hanging length             | 395mm (nominal)                                                                                                                                                    |
| Covering capacity (net)    | 9.7 tiles/m <sup>2</sup> at 75mm headlap<br>10.5 tiles/m <sup>2</sup> at 100mm headlap                                                                             |
| Weight of tiling (approx.) | 44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap<br>47.5kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 100mm headlap                                  |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap<br>3.1 lin.m/m <sup>2</sup> at 100mm headlap                                                                              |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Tile nails                 | 45mm x 3.35mm nail                                                                                                                                                 |
| Fixing clips               | Eaves, verge and slate clips                                                                                                                                       |
| Authority                  | BS EN 490                                                                                                                                                          |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## LAYING DUO EDGEMERE

Duo Edgemere should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site, in alternate courses to form verges and abutments.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard


Here to  
Help



# RIVEN EDMERE

A thin leading edge interlocking slate with the addition of a riven surface, providing a more natural appearance with variegated look, depth and tone.

## COLOUR AVAILABILITY



Key  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |
| Minimum pitch*             | 22.5° (75mm headlap)<br>17.5° (100mm headlap)                                                                                                                      |
| Maximum pitch              | 90°                                                                                                                                                                |
| Minimum headlap            | 75mm (22.5° and above)<br>100mm (below 22.5°)                                                                                                                      |
| Maximum gauge              | 345mm                                                                                                                                                              |
| Tile thickness             | 18mm (nominal)                                                                                                                                                     |
| Cover width                | 298mm (nominal)                                                                                                                                                    |
| Hanging length             | 395mm (nominal)                                                                                                                                                    |
| Covering capacity (net)    | 9.7 tiles/m <sup>2</sup> at 75mm headlap<br>10.5 tiles/m <sup>2</sup> at 100mm headlap                                                                             |
| Weight of tiling (approx.) | 44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap<br>47.5kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 100mm headlap                                  |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap<br>3.1 lin.m/m <sup>2</sup> at 100mm headlap                                                                              |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Tile nails                 | 45mm x 3.35mm nail                                                                                                                                                 |
| Fixing clips               | Eaves, verge and slate clips                                                                                                                                       |
| Authority                  | BS EN 490                                                                                                                                                          |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## RIVEN EDMERE FITTINGS

Available in all colours to match main tiles.



Riven Edgemere half slate




Edgemere dry verge

Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Purpose made half slates are available and can be formed on site by cutting along the scoreline.

# MODERN



A flat, smooth, single lap interlocking design, whose appearance is enhanced by the required broken bond laying pattern.



## COLOUR AVAILABILITY



Key  
(G) Granular finish  
(S) Smooth finish



## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 22.5° Smooth (75mm headlap)<br>17.5° Smooth (100mm headlap)                                                                                                        | 30° Granular (75mm headlap)<br>25° Granular (100mm headlap)    |
| Maximum pitch              | 90°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 345mm                                                                                                                                                              |                                                                |
| Tile thickness             | 30mm (nominal)                                                                                                                                                     |                                                                |
| Cover width                | 292mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 397mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 9.9 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                           | 10.7 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 50kg/m <sup>2</sup> (0.49 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 54kg/m <sup>2</sup> (0.53 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Tile nails                 | 50mm x 3.35mm nail                                                                                                                                                 |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## MODERN HALF TILE

Available in all colours to match main tiles.

Modern should be laid broken bond. The required broken bond pattern is created by the introduction of half tiles, to form verges and abutments in alternate courses. Purpose made half tiles are available and can be formed on site by cutting along the scoreline.



Note: All measurements in mm.



# DUO MODERN

A flat, smooth, single lap, interlocking tile with a ‘mock bond’ joint is enhanced by the required broken bond laying technique.



## COLOUR AVAILABILITY



Key  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 22.5° (75mm headlap)<br>17.5° (100mm headlap)                                                                                                                      |                                                                |
| Maximum pitch              | 90°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 345mm                                                                                                                                                              |                                                                |
| Tile thickness             | 30mm (nominal)                                                                                                                                                     |                                                                |
| Cover width                | 292mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 397mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 9.9 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                           | 10.7 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 50kg/m <sup>2</sup> (0.49 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 54kg/m <sup>2</sup> (0.53 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Tile nails                 | 50mm x 3.35mm nail                                                                                                                                                 |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## LAYING DUO MODERN


Duo Modern should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width tiles, cut from standard tiles on site, in alternate courses to form verges and abutments.

# MENDIP

A double pantile design with elegant flowing lines, providing instant visual appeal.



## COLOUR AVAILABILITY



Anthracite (S)



Smooth Grey (S)



Antique Brown (G)



Smooth Brown (S)



Dark Red (G)



Old English Dark Red (S)



Mosborough Red (S)

Key  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 17.5° Smooth (75mm headlap)<br>15° Smooth (100mm headlap)                                                                                                          | 30° Granular (75mm headlap)<br>25° Granular (100mm headlap)    |
| Maximum pitch              | 90°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 345mm                                                                                                                                                              |                                                                |
| Body thickness             | 27mm (nominal)                                                                                                                                                     |                                                                |
| Overall depth              | 59mm                                                                                                                                                               |                                                                |
| Cover width                | 298mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 397mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 9.7 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                           | 10.5 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 46kg/m <sup>2</sup> (0.45 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 49kg/m <sup>2</sup> (0.48 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Tile nails                 | 70mm x 3.35mm nail                                                                                                                                                 |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified


## LONG RAFTER LENGTHS

Mendip interlocking tiles are suitable for rafter lengths up to 10m as follows:

- 15° - 17.5° pitch will require a minimum headlap of 100mm
- Above 17.5° pitch will require a minimum headlap of 75mm

## MENDIP HALF TILE FOR CLOAK VERGE

Available in all colours to match main tiles.



Environmental  
Product Declaration

FOR MORE [marley.co.uk](https://www.marley.co.uk)

# MENDIP 12.5

A double pantile designed with a variable gauge and subtle design modifications to achieve an even lower pitch.

lowpitch



## COLOUR AVAILABILITY



Smooth Grey (S)



Smooth Brown (S)



Old English Dark Red (S)

Key  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |
| Minimum pitch*             | 12.5° Smooth (100mm headlap, up to 6m rafters)                                                                                                                     |
| Maximum pitch**            | 44°                                                                                                                                                                |
| Minimum headlap            | 100mm                                                                                                                                                              |
| Maximum gauge              | 320mm                                                                                                                                                              |
| Body thickness             | 27mm (nominal)                                                                                                                                                     |
| Overall depth              | 59mm                                                                                                                                                               |
| Cover width                | 298mm (nominal)                                                                                                                                                    |
| Hanging length             | 397mm (nominal)                                                                                                                                                    |
| Covering capacity (net)    | 10.5 tiles/m <sup>2</sup> at 100mm headlap                                                                                                                         |
| Weight of tiling (approx.) | 49kg/m <sup>2</sup> (0.48 kN/m <sup>2</sup> ) at 100mm headlap                                                                                                     |
| Battens required (net)     | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                                                                                                                          |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixing clips               | Eaves, verge and tile clips, Mendip headclip, SoloFix                                                                                                              |
| Authority                  | BS EN 490                                                                                                                                                          |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

\*\* For rafter pitches over 15°, see Mendip (page 38).

## SUSTAINABILITY

✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

# LUDLOW MAJOR


Simple, strong lines exploit the interplay between light and shade.



## COLOUR AVAILABILITY



Smooth Grey (S)



Antique Brown (G)



Smooth Brown (S)

Key  
(G) Granular finish  
(S) Smooth finish



Dark Red (G)



Old English Dark Red (S)



Mosborough Red (S)

## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 25° Smooth (75mm headlap)<br>22.5° Smooth (100mm headlap)                                                                                                          | 30° Granular (75mm headlap)                                    |
| Maximum pitch              | 90°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 345mm                                                                                                                                                              |                                                                |
| Body thickness             | 25mm (nominal)                                                                                                                                                     |                                                                |
| Overall depth              | 45mm                                                                                                                                                               |                                                                |
| Cover width                | 295mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 399mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 9.8 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                           | 10.6 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 45kg/m <sup>2</sup> (0.44 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 49kg/m <sup>2</sup> (0.48 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Tile nails                 | 55mm x 3.35mm nail                                                                                                                                                 |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

# LUDLOW PLUS



Ideal for refurbishment applications, where its smaller format reduces wastage.



## COLOUR AVAILABILITY



**Key**  
(G) Granular finish  
(S) Smooth finish



## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 387mm x 229mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 25° Smooth (75mm headlap)<br>22.5° Smooth (100mm headlap)                                                                                                          | 30° Granular (75mm headlap)                                    |
| Maximum pitch              | 90°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 312mm                                                                                                                                                              |                                                                |
| Body thickness             | 25mm (nominal)                                                                                                                                                     |                                                                |
| Overall depth              | 45mm                                                                                                                                                               |                                                                |
| Cover width                | 204mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 361mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 15.7 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                          | 17.1 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 47kg/m <sup>2</sup> (0.46 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 51kg/m <sup>2</sup> (0.50 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 3.2 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.5 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Tile nails                 | 50mm x 3.35mm nail                                                                                                                                                 |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available



# DOUBLE ROMAN


A 2000 year old profile with precision-engineered functionality.



## COLOUR AVAILABILITY



Smooth Grey (S)



Antique Brown (G)



Smooth Brown (S)



Dark Red (G)



Old English Dark Red (S)



Mosborough Red (S)

Key  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 25° Smooth (75mm headlap)<br>22.5° Smooth (100mm headlap)                                                                                                          | 30° Granular (75mm headlap)                                    |
| Maximum pitch              | 90°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 345mm                                                                                                                                                              |                                                                |
| Body thickness             | 28mm (nominal)                                                                                                                                                     |                                                                |
| Overall depth              | 53mm                                                                                                                                                               |                                                                |
| Cover width                | 300mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 397mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 9.7 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                           | 10.4 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 47kg/m <sup>2</sup> (0.46 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Tile nails                 | 65mm x 3.35mm nail                                                                                                                                                 |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)




Environmental  
Product Declaration  
available

- ✓ BES 6001 Responsible Sourcing certified

### DOUBLE ROMAN HALF TILE FOR CLOAK VERGE


Available in all colours to match main tiles.



# WESSEX

Designed to shed water efficiently at pitches down to 15°, the Wessex has clean, simple lines with a pleasing minimalist style.

lowpitch



## COLOUR AVAILABILITY



Smooth Brown (S)



Smooth Grey (S)

Key  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |                                                                |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|
| Size of tile               | 420mm x 330mm                                                                                                                                                      |                                                                |
| Minimum pitch*             | 15°                                                                                                                                                                |                                                                |
| Maximum pitch              | 44°                                                                                                                                                                |                                                                |
| Minimum headlap            | 75mm                                                                                                                                                               |                                                                |
| Maximum gauge              | 345mm                                                                                                                                                              |                                                                |
| Body thickness             | 29mm (nominal)                                                                                                                                                     |                                                                |
| Overall depth              | 56mm                                                                                                                                                               |                                                                |
| Cover width                | 298mm (nominal)                                                                                                                                                    |                                                                |
| Hanging length             | 403mm (nominal)                                                                                                                                                    |                                                                |
| Covering capacity (net)    | 9.7 tiles/m <sup>2</sup> at 75mm headlap                                                                                                                           | 10.5 tiles/m <sup>2</sup> at 100mm headlap                     |
| Weight of tiling (approx.) | 50kg/m <sup>2</sup> (0.49 kN/m <sup>2</sup> ) at 75mm headlap                                                                                                      | 53kg/m <sup>2</sup> (0.52 kN/m <sup>2</sup> ) at 100mm headlap |
| Battens required (net)     | 2.9 lin.m/m <sup>2</sup> at 75mm headlap                                                                                                                           | 3.1 lin.m/m <sup>2</sup> at 100mm headlap                      |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                                                |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                                                                |
| Authority                  | BS EN 490                                                                                                                                                          |                                                                |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

# ANGLIA

A single lap interlocking concrete tile with the classic clay pantile profile and a bullnosed leading edge design.




## COLOUR AVAILABILITY



Antique Brown (G)



Smooth Grey (S)



Old English Dark Red (S)

**Key**  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

|                            |                                                                                                                                                                    |                             |
|----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------|
| Size of tile               | 387mm x 230mm                                                                                                                                                      |                             |
| Minimum pitch*             | 30° Smooth (75mm headlap)<br>25° Smooth (100mm headlap)                                                                                                            | 30° Granular (75mm headlap) |
| Maximum pitch              | 90°                                                                                                                                                                |                             |
| Minimum headlap            | 75mm                                                                                                                                                               |                             |
| Maximum gauge              | 312mm                                                                                                                                                              |                             |
| Body thickness             | 30mm (nominal)                                                                                                                                                     |                             |
| Overall depth              | 71mm                                                                                                                                                               |                             |
| Cover width                | 204mm (nominal)                                                                                                                                                    |                             |
| Hanging length             | 370mm (nominal)                                                                                                                                                    |                             |
| Covering capacity (net)    | 15.7 tiles/m <sup>2</sup> at 75mm headlap<br>17.1 tiles/m <sup>2</sup> at 100mm headlap                                                                            |                             |
| Weight of tiling (approx.) | 47kg/m <sup>2</sup> (0.46 kN/m <sup>2</sup> ) at 75mm headlap<br>51kg/m <sup>2</sup> (0.50 kN/m <sup>2</sup> ) at 100mm headlap                                    |                             |
| Battens required (net)     | 3.2 lin.m/m <sup>2</sup> at 75mm headlap<br>3.5 lin.m/m <sup>2</sup> at 100mm headlap                                                                              |                             |
| Batten size recommended    | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                             |
| Tile nails                 | 38mm x 3.35mm nail                                                                                                                                                 |                             |
| Fixing clips               | Eaves, verge and tile clips                                                                                                                                        |                             |
| Authority                  | BS EN 490                                                                                                                                                          |                             |

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

# CONCRETE FITTINGS

## PLAIN TILE FITTINGS

Available in all colours to match main tiles.

|                  |                                       |                      |                                         |                                       |
|------------------|---------------------------------------|----------------------|-----------------------------------------|---------------------------------------|
|                  |                                       |                      |                                         |                                       |
| Description      | Plain tile-and-a-half                 | Plain eaves/top tile | Cloak verge tile<br>(Left & right hand) | Internal angle<br>(Left & right hand) |
|                  |                                       |                      |                                         |                                       |
| Description      | External angle<br>(Left & right hand) | Valley tile          | Arris hip                               | Bonnet hip                            |
| Angles available | 90°, 120°, 135°                       | 35-50°               | 35-40°                                  | 35-50°                                |

## INTERLOCKING TILE CLOAK VERGES

Available in all colours to match main tiles.

|             |                       |                             |                       |                     |                           |                     |
|-------------|-----------------------|-----------------------------|-----------------------|---------------------|---------------------------|---------------------|
|             |                       |                             |                       |                     |                           |                     |
| Description | Mendip<br>cloak verge | Double Roman<br>cloak verge | Modern<br>cloak verge | Mendip<br>half tile | Double Roman<br>half tile | Modern<br>half tile |

## VERGES, RIDGES AND HIPS (continued on page 46)

Available in a range of colours to match main tiles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

|                   |                   |                             |                                |                           |                                     |
|-------------------|-------------------|-----------------------------|--------------------------------|---------------------------|-------------------------------------|
|                   |                   |                             |                                |                           |                                     |
| Description       | Segmental ridge†‡ | Segmental security<br>ridge | Segmental block<br>end ridge†‡ | Segmental<br>mono-ridge†‡ | Segmental mono<br>block end ridge†‡ |
| Colours available | All colours       | All colours                 | All colours                    | All colours               | All colours                         |
| Pitch range#      | 15-60° dry ridge* | 15-50° bedded               | 15-60° dry ridge*              | 15-55° dry ridge          | 15-55° dry ridge                    |

† Compatible with Marley ventilated dry ridge system

‡ Compatible with Marley Universal RidgeFast

\* 60° Plain, Mendip, Wessex and Anglia only

Note: All measurements in mm.

# Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

# CONCRETE FITTINGS

## VERGES, RIDGES AND HIPS (continued)

Available in a range of colours to match main tiles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

|                   |                  |                       |                         |                   |                             |
|-------------------|------------------|-----------------------|-------------------------|-------------------|-----------------------------|
|                   |                  |                       |                         |                   |                             |
| Description       | Modern ridge†‡§  | Modern security ridge | Modern block end ridge† | Modern mono-ridge | Modern mono block end ridge |
| Colours available | All colours      | All colours           | All colours             | All colours       | All colours                 |
| Pitch range#      | 15-55° dry ridge | 15-45° bedded         | 15-55° dry ridge        | 15-45° bedded     | 15-45°                      |

|                   |                          |                      |                      |                       |                         |
|-------------------|--------------------------|----------------------|----------------------|-----------------------|-------------------------|
|                   |                          |                      |                      |                       |                         |
| Description       | Modern stop end hip tile | Third round hip tile | Third round stop end | Half round baby ridge | Pascoll roll baby ridge |
| Colours available | All colours              | All colours          | All colours          | All colours           | All colours             |
| Pitch range#      | 15-55°†‡§                | 15-55°†‡§            | 15-55°†‡§            | 15-55°                | 15-45°                  |

|                   |                                                       |                                                       |                                                 |                          |                      |
|-------------------|-------------------------------------------------------|-------------------------------------------------------|-------------------------------------------------|--------------------------|----------------------|
|                   |                                                       |                                                       |                                                 |                          |                      |
| Description       | 90° Angle ridge/hip§<br>90° security angle ridge/hip† | 125° Angle ridge/hip<br>Security 125° Angle ridge/hip | 145° Angle hip<br>Security 145° Angle ridge/hip | Gas vent ridge terminal§ | Ridge vent terminal§ |
| Colours available | see below*                                            | see below*                                            | see below*                                      | see below**              | see below**          |
| Pitch range#      | 45-50° bedded                                         | 12-25°                                                | 15-25°                                          | 15-55° dry ridge         | 15-55° dry ridge     |

|                   |                                    |                                 |                         |                         |
|-------------------|------------------------------------|---------------------------------|-------------------------|-------------------------|
|                   |                                    |                                 |                         |                         |
| Description       | Segmental ridge junction apex cap^ | Modern ridge junction apex cap^ | Third round apex cap^   | Modern hip apex cap^    |
| Colours available | Grey, Brown, Terracotta            | Grey, Brown, Terracotta         | Grey, Brown, Terracotta | Grey, Brown, Terracotta |

† Compatible with Marley ventilated dry ridge system  
‡ Compatible with Marley dry hip system  
§ Compatible with Marley Universal RidgeFast  
‡ Compatible with Marley Universal HipFast  
# Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

\* Available in Smooth Grey, Mosborough Red, Smooth Brown and Old English Dark Red  
\*\* Available in Smooth Grey, Mosborough Red, Smooth Brown and Anthracite  
^ Can only be used with our Ventilated Dry Ridge and Hip Batten Section System



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard


Here to  
Help



## Dry fix & ventilation systems

# EAVES SYSTEMS

## 10MM EAVES VENT

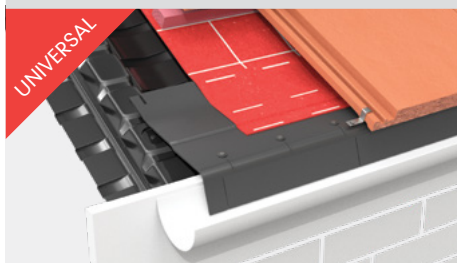

Designed to provide continuous 10mm free vent areas to roof voids in an efficient and unobtrusive manner for roofs with a lower pitch and deeper insulation.

### Advantages

- Simple, fast installation
- Wide rafter roll for lower pitched roofs with deeper insulation
- Dry fix system
- Allows clip fixing of tiles at eaves
- Compresses insulation ensuring airflow
- Prevents ponding of water
- Prevents ingress of birds, vermin and insects
- Meets BS 5534 requirements and NHBC guidelines

### Function and compatibility

- 10mm continuous ventilation at eaves
- 10,000mm<sup>2</sup> free area of ventilation per linear metre
- 12.5°-60° pitched roofs
- Eaves-to-ridge or eaves-to-eaves ventilation
- Suitable for all Marley tiles and slates
- Suitable for other manufacturers' tiles and slates†

### Universal 10mm eaves vent system (6m pack) 46350


- 6m eaves rafter roll
- 6 No. 2-in-1 vented eaves

### Comb filler strip 30425

### Continuous rafter roll (2 x 6m) 46323

† Check with the manufacturer to confirm compatibility with Marley systems.

## 25MM EAVES VENT

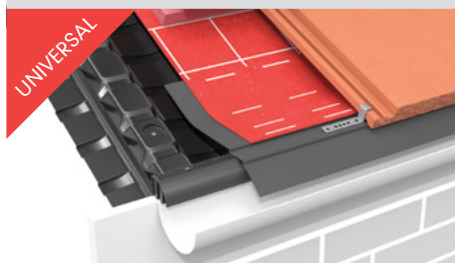

The system is both efficient and unobtrusive, and it is suitable for roof pitches from 12.5° to 55°. It can also be used for ventilating the batten cavity where needed.

### Advantages

- Simple, fast installation
- Dry fix system
- Allows clip fixing of tiles at eaves
- Compresses insulation ensuring airflow
- Prevents ponding of water
- Prevents ingress of birds, vermin and insects
- Meets BS 5534 requirements and NHBC guidelines

### Function and compatibility

- 25mm continuous ventilation at eaves
- 25,000mm<sup>2</sup> free area of ventilation per linear metre
- 12.5°-60° pitched roofs
- Eaves-to-ridge or eaves-to-eaves ventilation
- Suitable for all Marley tiles and slates
- Suitable for other manufacturers' tiles and slates†

### Universal 25mm eaves vent system (6m pack) 46351

- 6m eaves rafter roll
- 10 No. felt support tray
- 6 No. strip ventilator

### Comb filler strip 30425

### Continuous rafter roll (2 x 6m) 46323

† Check with the manufacturer to confirm compatibility with Marley systems.

# VERGE SYSTEMS

## UNIVERSAL DRY VERGE SYSTEM



The Marley Universal Dry Verge system has been designed to make verge detailing secure and elegantly simple, complying with BS 8612 and BS 5534.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Drainage channels reduce the risk of gable end staining
- Starter fixing bracket enables fast and secure installation
- Suitable for other manufacturers' tiles and slates†
- Manufactured from high grade polypropylene for outstanding durability
- Simple and fast to install
- Also suitable for verges without bargeboard
- Dry verge refurbishment kit allows retro-fit

### Dry verge system

|                        |       |
|------------------------|-------|
| 28 No. left hand units |       |
| Brown                  | 39113 |
| Grey                   | 39111 |
| Terracotta             | 39114 |

|                         |       |
|-------------------------|-------|
| 28 No. right hand units |       |
| Brown                   | 39213 |
| Grey                    | 39211 |
| Terracotta              | 39214 |

|                               |       |
|-------------------------------|-------|
| Starter pack (also available) | 53931 |
|-------------------------------|-------|

### End caps


|                      |            |      |
|----------------------|------------|------|
| Modern ridge         |            | 394* |
| Segmental ridge      |            | 395* |
| Modern mono-ridge    | Left hand  | 408* |
|                      | Right hand | 409* |
| Segmental mono-ridge | Left hand  | 427* |
|                      | Right hand | 428* |

|                             |       |
|-----------------------------|-------|
| Dry verge refurbishment kit | 53580 |
|-----------------------------|-------|

† Check with the manufacturer to confirm compatibility with Marley systems.

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta.

## EDGEMERE DRY VERGE SYSTEM

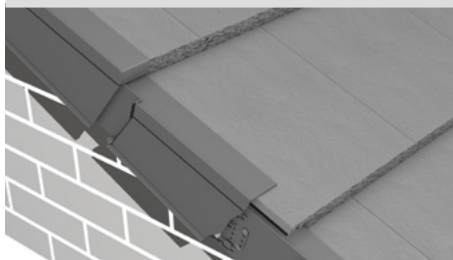

Compatible with Edgemere, this dry verge provides a strong, mechanically fixed, weathertight verge that meets the requirements of BS 5534. The system is fast, simple to install and offers a sleek, maintenance-free verge solution.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Drainage channels reduce the risk of gable end staining
- Starter fixing bracket enables fast and secure installation
- Manufactured from high grade polypropylene for outstanding durability
- Simple and fast to install
- Also suitable for verges without bargeboard
- Dry verge refurbishment kit allows retro-fit

### Verge units

|  |            |      |
|--|------------|------|
|  | Left hand  | 381* |
|  | Right hand | 382* |

|                               |       |
|-------------------------------|-------|
| Edgemere dry verge fixing kit | 53830 |
|-------------------------------|-------|

### End caps

|                      |            |       |
|----------------------|------------|-------|
| Edgemere ridge       |            | 384** |
| Modern mono-ridge    | Left hand  | 408** |
|                      | Right hand | 409** |
| Segmental mono-ridge | Left hand  | 427** |
|                      | Right hand | 428** |

|                             |       |
|-----------------------------|-------|
| Dry verge refurbishment kit | 53580 |
|-----------------------------|-------|

|                  |       |
|------------------|-------|
| Batten end clips | 30214 |
|------------------|-------|

\* Suffix with colour code 01 Grey, 03 Brown.

\*\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

# VERGE SYSTEMS



Compatible with Ashmore, this dry verge provides a strong, mechanically fixed, weathertight verge that meets the requirements of BS 5534. The system is fast, simple to install and offers a sleek, maintenance-free verge solution.

**Advantages**


- Meets BS 5534 requirements and NHBC guidelines
- Multiple drainage channels to reduce the risk of gable end staining
- Starter fixing bracket enables fast and secure installation
- Sleek design complements plain tile aesthetic
- Manufactured from high grade polypropylene for outstanding durability
- Simple and fast to install
- Also suitable for verges without bargeboard

**Verge units**

|                                |            |         |
|--------------------------------|------------|---------|
| Ashmore dry verge starter unit |            | MA39901 |
| Grey                           | Left hand  | MA39611 |
|                                | Right hand | MA39711 |
| Brown                          | Left hand  | MA39613 |
|                                | Right hand | MA39713 |
| Terracotta                     | Left hand  | MA39614 |
|                                | Right hand | MA39714 |

**Segmental ridge end caps**

|            |         |
|------------|---------|
| Grey       | MA39801 |
| Brown      | MA39803 |
| Terracotta | MA39804 |

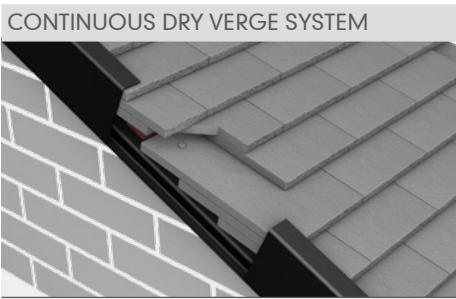

Continuous dry verge provides a strong, weathertight and maintenance-free verge that meets the requirements of BS 5534. The system is fast and simple to install and offers sleek, uninterrupted verges without the need for mortar.

**Advantages**


- Meets BS 5534 requirements and NHBC guidelines
- Meets BS 8612 requirements
- Strong and durable
- Weathertight and maintenance free
- Creates continuous clean verge detail

|                             |       |
|-----------------------------|-------|
| <b>Continuous dry verge</b> |       |
| Verge section (3 metre)     | 38501 |
| Fixing kit                  | 38510 |

Available in Black.



# VERGE SYSTEMS

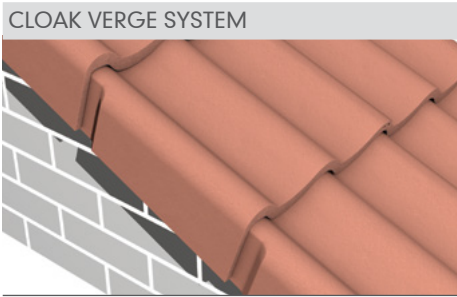

Provides a mechanically fixed, durable, maintenance free verge solution for Mendip (illustrated above), Modern, Double Roman interlocking tiles and double lap plain tiles.

|                                 |            |             |
|---------------------------------|------------|-------------|
| Mendip cloak verge              |            |             |
|                                 | Left hand  | 245         |
|                                 | Right hand | 246         |
| Mendip half tile                |            | 147         |
| Mendip fixing kit               |            | 54252       |
| Double Roman cloak verge        |            |             |
|                                 | Left hand  | 265         |
|                                 | Right hand | 266         |
| Double Roman half tile          |            | 102         |
| Double Roman fixing kit         |            | 54252       |
| Concrete plain tile cloak verge |            |             |
|                                 | Left hand  | 249         |
|                                 | Right hand | 250         |
| Segmental block end ridge       |            |             |
|                                 |            | 191         |
| Segmental mono block end ridge  |            |             |
|                                 | Left hand  | 189         |
|                                 | Right hand | 190         |
| Modern cloak verge              |            |             |
|                                 | Left hand  | 371         |
|                                 | Right hand | 370         |
| Modern cloak verge half tile    |            | 372         |
| Modern fixing kit               |            | 53730       |
| Modern block end ridge          |            |             |
|                                 |            | 374         |
| Modern mono block end ridge     |            |             |
|                                 | Left hand  | 375         |
|                                 | Right hand | 376         |
| Clay plain tile cloak verge     |            |             |
|                                 | Left hand  | MAKE**ZLVTB |
|                                 | Right hand | MAKE**ZRVTB |

\*\* Suffix with colour code: 001 Red Smooth, 003 Red Sandfaced, 004 Heather Sandfaced, 006 Farmhouse Brown, 007 Grey Sandfaced, 009 Brindle, 033 Heather Blend, 034 Burnished, 151 Ashurst, 150 Aylesham Mix, 142 Loxleigh, 305 Autumn Brindle, 402 Dark Heather, 403 Staffs Mix, 406 Staffs Blue, 408 Blue Smooth

# VALLEY SYSTEM




Mortar-free solution suitable for use with concrete interlocking tiles and concrete/clay plain tiles. Suitable on rafter pitches from 15-60° and accommodates up to 20° pitch difference either side of valley.

|                                                                  |       |
|------------------------------------------------------------------|-------|
| Advantages                                                       |       |
| – Dry fix, mortar-free system                                    |       |
| – Durable GRP technology                                         |       |
| – Simple and fast installation                                   |       |
| – Can accommodate up to 20° pitch variance either side of valley |       |
| – Performs on pitches up to 60°                                  |       |
| – Gives the appearance of a close-cut roof                       |       |
| Universal GRP dry valley                                         |       |
| (3m lengths)                                                     |       |
| Low profile                                                      | 30422 |
| High profile                                                     | 30421 |



# HIP SYSTEMS

## HIPFAST SYSTEM

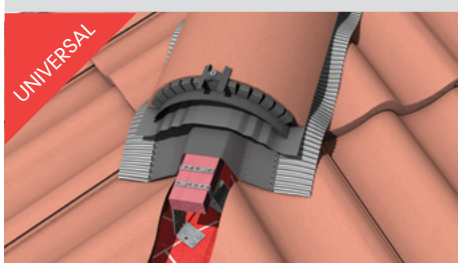


Simple and rapidly installed ventilated dry hip system, compatible with all tiles and slates up to 45° (suitable up to 60° subject to tile/slate profile and hip tile type).

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Meets BS 8612 requirements
- Highest grade aluminium flashing
- Hydrophobic membrane for maximum weather resistance
- Elastomeric membrane for easy installation and prevents rucking
- Bespoke batten brackets for anchoring to structure
- Can be used with all concrete tiles and slates
- Completely dry fixed system
- Suitable with standard hip tiles

|                                                                                        |       |
|----------------------------------------------------------------------------------------|-------|
| <b>Universal HipFast system (6m pack)</b>                                              | 53400 |
| - 6m length hip roll                                                                   |       |
| - 6 No. batten brackets                                                                |       |
| - 13 No. hip unions                                                                    |       |
| - 2 No. tapered filler units                                                           |       |
| <b>Hip support trays</b>                                                               | 34002 |
| - 9 No. 715mm                                                                          |       |
| <b>RidgeFast/HipFast Union Packs</b>                                                   | 53303 |
| Tile head clip pack (20 No.)                                                           | 43604 |
| Tile tail clip pack (20 No.)                                                           | 43602 |
| Secret cut tile clip pack (50 No.)                                                     | 43607 |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay third round hips with profiled tiles) | 70000 |

## DRY HIP SYSTEM

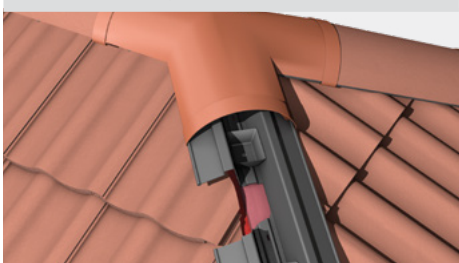

Suitable for all concrete tiles when used in conjunction with Third round or Modern hip tiles for roof pitches 15-45°.

### Advantages


- Meets BS 5534 requirements and NHBC guidelines
- Simple fast installation
- Weathertight and maintenance free
- Can be used up to 45° pitch
- Can be used with all Marley concrete interlocking tiles
- Fully compatible with ventilated dry ridge system

|                                |                |
|--------------------------------|----------------|
| <b>Batten section</b>          | 43300          |
| <b>Fixing kits</b>             |                |
| Low profile                    | 54360          |
| High profile                   | 54361          |
| <b>Hip tail clip pack</b>      | 43602          |
| <b>Ridge unions</b>            |                |
| Modern ridge union             | 4140*          |
| Third round hip union          | 4350*          |
| <b>Apex caps</b>               |                |
| Modern hip apex cap            | (15-24°) 4381* |
|                                | (25-35°) 4382* |
|                                | (36-45°) 4383* |
| Third round hip apex cap       | (15-24°) 4371* |
|                                | (25-35°) 4372* |
|                                | (36-45°) 4373* |
| <b>Block end hip tiles</b>     |                |
| Third round block end hip tile | 291            |
| Modern block end hip tile      | 292            |

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

# RIDGE SYSTEMS

## RIDGEFAST SYSTEM

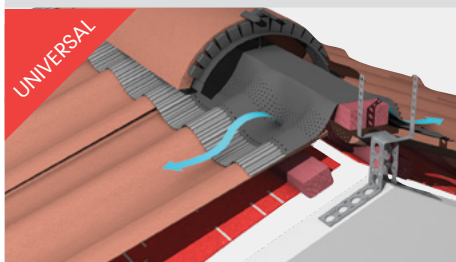

Simple and rapidly installed ventilated dry ridge system providing 5mm continuous ventilation. Compatible with all tiles and slates from 15-60° dependent on circumstances.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Meets BS 8612 requirements
- Highest grade aluminium flashing
- Hydrophobic membrane for maximum weather resistance
- Elastomeric membrane for easy installation and prevents rucking
- Bespoke batten brackets for anchoring to structure
- Suitable for other manufacturers' tiles and slates†
- Completely dry fixed system
- Suitable with standard ridge tiles
- Provides 5mm continuous ventilation along the ridge

|                                             |       |
|---------------------------------------------|-------|
| <b>Universal RidgeFast system (6m pack)</b> | 53300 |
| - 6m length ridge roll                      |       |
| - 10 No. ridge batten brackets              |       |
| - 13 No. ridge union straps                 |       |
| - 13 No. ridge union clamps                 |       |


|                                                        |       |
|--------------------------------------------------------|-------|
| <b>RidgeFast/HipFast Union Packs (pack quantity 6)</b> | 53303 |
|--------------------------------------------------------|-------|

|                                           |       |
|-------------------------------------------|-------|
| <b>RidgeFast blanking tape (optional)</b> | 33001 |
|-------------------------------------------|-------|

|                                                                                            |       |
|--------------------------------------------------------------------------------------------|-------|
| <b>100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles)</b> | 70000 |
|--------------------------------------------------------------------------------------------|-------|

† Check with the manufacturer to confirm compatibility with Marley systems.

## VENTILATED DRY RIDGE SYSTEM

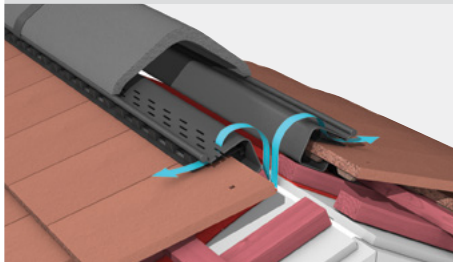

Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles when used on roof pitches up to 55°\*\*.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Simple and fast to install
- Weathertight and maintenance free
- Can be used up to 55° pitch\*\*
- Provides 5mm continuous ventilation along the ridge
- Can be used with all fibre cement slates, concrete tiles and slates
- Fully compatible with dry hip system

### Batten sections

|                            |       |
|----------------------------|-------|
| Low profile                | 41101 |
| High profile               | 41201 |
| Steep pitch (low profile)  | 41102 |
| Steep pitch (high profile) | 41202 |

### Ridge unions

|                                      |      |
|--------------------------------------|------|
| Segmental ridge union                | 413* |
| Modern ridge union                   | 414* |
| Modern/segmental adaptor ridge union | 420* |

|                                    |       |
|------------------------------------|-------|
| Concrete tiles & slates fixing kit | 41000 |
|------------------------------------|-------|

### Filler units†

|                                       |       |
|---------------------------------------|-------|
| Double Roman - vented                 | 42105 |
| Modern, Duo Modern, Edgemere - vented | 41501 |
| Ludlow Major - vented                 | 41601 |
| Ludlow Plus - vented                  | 41508 |
| Mendip - vented                       | 41701 |
| Wessex - vented                       | 41901 |
| Anglia - vented                       | 41506 |
| Fibre Cement Slates                   | 41705 |

### Apex caps

|                          |      |
|--------------------------|------|
| Segmental ridge junction | 439* |
| Modern ridge junction    | 440* |

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

\*\* For roof pitches over 55°, speak to the Technical Advisory Service

† Non vented ridge can be achieved by not slitting the underlay. Blanking tape can be used with Gas vent Ridge or Ridge Vent Terminals to prevent fumes reentering the building.

# RIDGE SYSTEMS

## VENTILATED DRY MONO RIDGE SYSTEM



Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles when used on roof pitches up to 55°\*\*.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Simple and fast to install
- Weathertight and maintenance free
- Can be used up to 55° pitch\*\*
- Provides 5mm continuous ventilation along the ridge
- Can be used with all fibre cement slates, concrete tiles and slates
- Fully compatible with dry hip system

### Batten sections

|                            |       |
|----------------------------|-------|
| Low profile                | 41101 |
| High profile               | 41201 |
| Steep pitch (low profile)  | 41102 |
| Steep pitch (high profile) | 41202 |

### Ridge unions

|                            |      |
|----------------------------|------|
| Segmental mono ridge union | 423* |
|----------------------------|------|

|                                    |       |
|------------------------------------|-------|
| Concrete tiles & slates fixing kit | 41000 |
|------------------------------------|-------|

### Filler units†

|                                       |       |
|---------------------------------------|-------|
| Double Roman - vented                 | 42105 |
| Modern, Duo Modern, Edgemere - vented | 41501 |
| Ludlow Major - vented                 | 41601 |
| Ludlow Plus - vented                  | 41508 |
| Mendip - vented                       | 41701 |
| Wessex - vented                       | 41901 |
| Anglia - vented                       | 41506 |
| Fibre Cement Slates                   | 41705 |

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

† Non vented ridge can be achieved by not slitting the underlay. Blanking tape can be used with Gas vent Ridge or Ridge Vent Terminals to prevent fumes reentering the building.

\*\* For roof pitches over 55°, speak to the Technical Advisory Service.

## RIDGE VENT TERMINALS



Suitable for natural soil, or mechanical ventilation. Provides high level ventilation for concrete tiles (9,500mm² free area), clay plain tiles (10,000mm² free area).

### Ridge vent terminal

Illustrated above – for natural ventilation of the roof void apex and connection to mechanical ventilation systems.

|                         |       |
|-------------------------|-------|
| For concrete tiles      | 198   |
| Plumbers accessory pack | 39090 |

### Gas vent ridge terminal for condensing boilers

|           |     |
|-----------|-----|
| Segmental | 254 |
| Modern    | 255 |

### Gas vent ridge terminal (concrete tiles)


For connection to gas appliances of rated input of 60 Kw max. only (not suitable for gas condensing boilers or oil fired boilers).

|                      |       |
|----------------------|-------|
| With extension piece | 256   |
| Gasket set (spare)   | 30346 |

For full product codes, please speak to Customer Services on 01283 722849.

# ABUTMENT SYSTEMS

TOP ABUTMENT VENTILATION SYSTEM

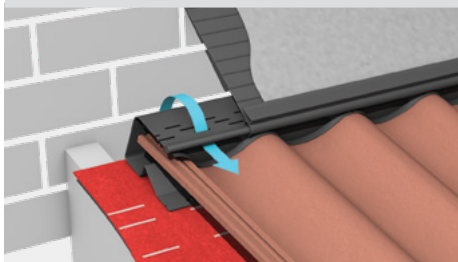

Designed to provide a totally dry fixed and weathertight top abutment that is fast and simple to install and at the same time provides ventilation at apex of the abutment.

## Batten sections


|                            |       |
|----------------------------|-------|
| Low profile                | 41101 |
| High profile               | 41201 |
| Steep pitch (low profile)  | 41102 |
| Steep pitch (high profile) | 41202 |
| Lead support strip         | 42505 |

|             |       |
|-------------|-------|
| Fixing Kits | 41000 |
|-------------|-------|

## Filler units†

|                                       |       |
|---------------------------------------|-------|
| Double Roman – vented                 | 42105 |
| Modern, Duo Modern, Edgemere – vented | 41501 |
| Ludlow Major – vented                 | 41601 |
| Ludlow Plus – vented                  | 41508 |
| Mendip – vented                       | 41701 |
| Wessex – vented                       | 41901 |
| Anglia – vented                       | 41506 |
| Fibre cement slates – vented          | 41705 |

DRY FIX SOAKERS

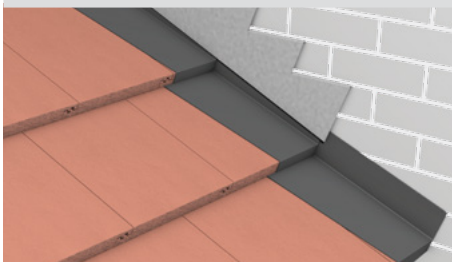

An easy-to-install, lightweight and highly affordable way to reduce both the material and labour costs associated with lead at side abutments.

## Modern dry soakers

|            |         |
|------------|---------|
| Left hand  | MA30476 |
| Right hand | MA30477 |

## Edgemere dry soakers

|            |         |
|------------|---------|
| Left hand  | MA30474 |
| Right hand | MA30475 |

## Ashmore dry soakers

|            |         |
|------------|---------|
| Left hand  | MA30472 |
| Right hand | MA30473 |

## Clay/concrete plain tile dry soakers

|            |         |
|------------|---------|
| Left hand  | MA30478 |
| Right hand | MA30479 |

## Fibre cement slate dry soakers

|                          |         |
|--------------------------|---------|
| Left hand and right hand | MA30480 |
|--------------------------|---------|

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation


Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

# ABUTMENT SYSTEMS


FLEXFAST LEAD REPLACEMENT ROLL

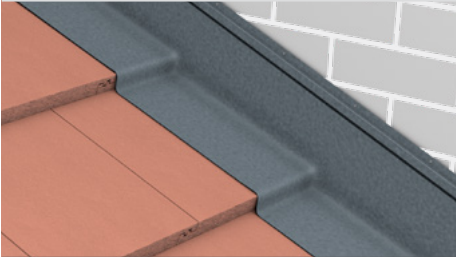

Flexfast is an easy-to-use, lightweight flashing for abutments at walls, side and top, abutments at rising parts of structures such as dormers and chimneys.

|                    |         |
|--------------------|---------|
| 5m x 450mm x 1.7mm | MA42611 |
| 5m x 300mm x 1.7mm | MA42610 |
| Trim 2.5m          | MA42345 |

BONDING GUTTERS

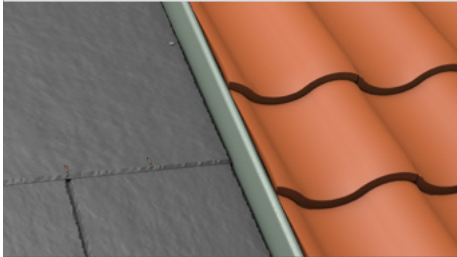

Easy-to-install, lightweight and highly affordable way to reduce the need for mortar and lead at the junction between two different roof coverings.

|              |         |
|--------------|---------|
| High profile | MA40471 |
| Low profile  | MA40470 |

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation


Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



# VENTILATION TERMINALS

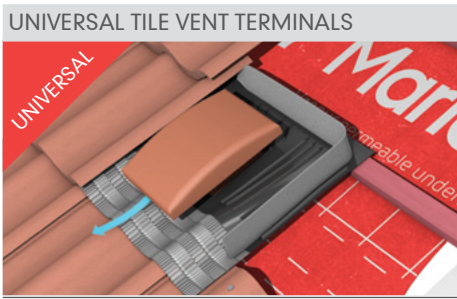

The Universal tile vent terminals are designed for roof void ventilation and connection to 110mm soil pipe or mechanical extract systems. Free area: 15,000mm<sup>2</sup>.

|                                                                            |       |
|----------------------------------------------------------------------------|-------|
| Universal tile vent terminals for large format concrete interlocking tiles |       |
| Grey                                                                       | 36700 |
| Brown                                                                      | 36703 |
| Terracotta                                                                 | 36704 |



The Universal Edgemere & Modern tile vents provide 10,000mm<sup>2</sup> free area of ventilation, and can be installed down to 20° minimum pitch at 100mm headlap. Designed to fit with similar tiles from other manufacturers.

|                                               |       |
|-----------------------------------------------|-------|
| Modern Universal contour vent terminal        | 461** |
| Edgemere Universal contour tile vent terminal | 475** |
| Universal contour vent terminal adaptor       | 39100 |

\*\* Suffix with colour code 01 Grey, 03 Brown, 05 Red, 08 Anthracite




Designed for natural, mechanical or soil pipe ventilation. Provides 10,000mm<sup>2</sup> free area of ventilation. Suitable for concrete and clay plain tile roof pitches 30° and above‡.

|                                          |      |      |       |
|------------------------------------------|------|------|-------|
| Universal plain tile vent                |      |      |       |
| Grey                                     |      |      | 45501 |
| Brown                                    |      |      | 45503 |
| Red                                      |      |      | 45505 |
| Flexible pipe ID 110mm (sold separately) |      |      | 39091 |
| Pressure resistance values               |      |      |       |
| Airflow (litres/second)                  | 15   | 30   | 60    |
| Pressure resistance (Pa)                 | 13.6 | 53.7 | 21    |

‡ Please note minimum pitch of tile will apply.

# VENTILATION TERMINALS

## CLAY IN-LINE TILE VENT TERMINALS

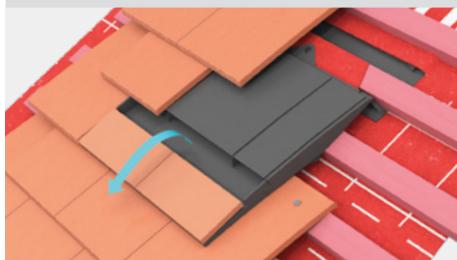

Real clay tile slips provide visual integration on roof slope and 6,100mm<sup>2</sup> free area of ventilation.


|                              |             |
|------------------------------|-------------|
| Clay in-line tile ventilator | MAKE**ZICVB |
|------------------------------|-------------|

|                           |              |
|---------------------------|--------------|
| Clay in-line tile adaptor | MAGL902ZVPAB |
|---------------------------|--------------|

|               |       |
|---------------|-------|
| Flexible pipe | 39091 |
|---------------|-------|

\*\* Suffix with colour code: 001 Red Smooth, 003 Red Sandfaced, 004 Heather Sandfaced, 006 Farmhouse Brown, 007 Grey Sandfaced, 009 Brindle, 033 Heather Blend, 034 Burnished, 142 Loxleigh, 305 Autumn Brindle, 350 Aylesham Mix, 351 Ashurst, 352 Weathered, 402 Dark Heather, 403 Staffs Mix, 406 Staffs Blue, 408 Blue Smooth

## CONTOUR IN-LINE VENT TERMINALS

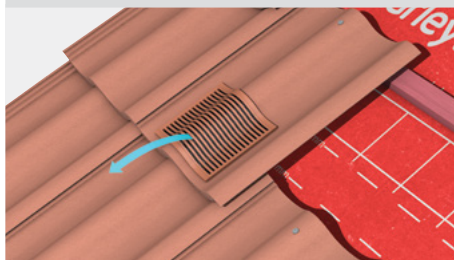

Discreet high performance vent terminals for high/low level roof space ventilation. Suitable for soil and mechanical ventilation. Minimum roof pitch 22.5°.

### Contour tile vents

|              |       |
|--------------|-------|
| Mendip       | 452** |
| Ashmore      | 450** |
| Wessex       | 459** |
| Ludlow Major | 456** |
| Double Roman | 453** |
| Ludlow Plus  | 457** |
| Anglia       | 460** |

|               |       |
|---------------|-------|
| Flexible pipe | 39091 |
|---------------|-------|

\*\* Suffix with colour code 01 Grey, 03 Brown, 05 Red, 08 Anthracite

## TILE VENT TERMINALS



Available in a wide range of colours and finishes, provides for high/low level roof space ventilation. Suitable for natural soil, or mechanical ventilation (except Ashmore)†.

### Terminals (with spigot)

|                            |      |
|----------------------------|------|
| Mendip (illustrated above) | 294* |
| Edgemere                   | 259* |
| Modern                     | 295* |
| Wessex                     | 296* |
| Ludlow Major               | 297* |
| Double Roman               | 298* |

|               |       |
|---------------|-------|
| Flexible pipe | 39091 |
|---------------|-------|

### Ventilation roof tiles


|         |     |
|---------|-----|
| Ashmore | 263 |
|---------|-----|

\* Available in all colours to match main tiles.

† Minimum pitch of tile will apply.


# SLATE ACCESSORIES

## UNIVERSAL RIDGE ROLL



Simple and rapidly installed dry fix system providing 5mm continuous ridge ventilation. Compatible with fibre cement slates and ridges.

|                 |      |
|-----------------|------|
| Ridge roll (6m) | Code |
|-----------------|------|



33010

## CONTINUOUS DRY VERGE




Easy-to-install continuous dry verge system, made from powder-coated aluminium, providing a neat weather-proof and durable finish for slates.

|                             |      |
|-----------------------------|------|
| Verge trim (3m) (pack of 8) | Code |
|-----------------------------|------|




42206

## DRY FIX SOAKERS




The Marley range of individual dry soakers are an easy to install, lightweight and highly affordable way to reduce both the material and labour costs associated with lead at side abutments.

|                         |      |
|-------------------------|------|
| Dry soaker (pack of 10) | Code |
|-------------------------|------|



30480  
(for both  
left and  
right hand)

## GRP SLATE DRY VALLEY SYSTEM

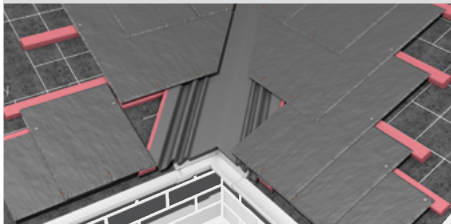

Developed to allow the designer freedom to specify a completely mortar-free roof, this system utilises the latest GRP technology. The advanced and unique parabolic gutter section improves discharge rates without added gutter depth.

|                    |      |
|--------------------|------|
| Valley trough (3m) | Code |
|--------------------|------|




30578

|  |      |
|--|------|
|  | Code |
|--|------|

|                                       |       |
|---------------------------------------|-------|
| Fibre cement slate vented filler unit | 41705 |
|---------------------------------------|-------|

## IN-LINE SLATE VENTILATOR

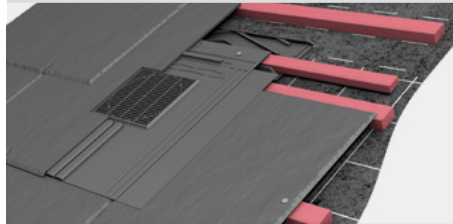

Ideal for roofs where the normal ventilation airpath is blocked by valleys, abutments, hips, dormer windows and firebreaks or party walls or where it is not possible to incorporate standard eaves or ridge ventilation.

|  |      |
|--|------|
|  | Code |
|--|------|

|                          |                  |
|--------------------------|------------------|
| In-line slate ventilator | EU_UNIVSLATEVENT |
|--------------------------|------------------|



|               |       |
|---------------|-------|
| Flexible pipe | 39091 |
|---------------|-------|

# SYSTEM SELECTOR

|                                      | CLAY PLAIN TILES | LINCOLN | SHINGLES | CONCRETE PLAIN TILES | EDGEMERE RANGE | ASHMORE | LUDLOW PLUS |
|--------------------------------------|------------------|---------|----------|----------------------|----------------|---------|-------------|
| <b>UNIVERSAL ROOFING ACCESSORIES</b> |                  |         |          |                      |                |         |             |
| 10mm eaves vent system               | •                | •       | •        | •                    | •              | •       | •           |
| 25mm eaves vent system               | •                | •       | •        | •                    | •              | •       | •           |
| Dry verge                            |                  |         |          |                      | •              |         | •           |
| HipFast                              | •                | •       |          | •                    | •              | •       | •           |
| RidgeFast                            | •                | •       |          | •                    | •              | •       | •           |
| Tile vent                            |                  |         |          |                      | •              |         | •           |
| GRP dry valley system (high)         |                  | •       |          |                      |                |         | •           |
| GRP dry valley system (low)          | •                |         |          | •                    | •              | •       |             |
| Underlays                            | •                | •       | •        | •                    | •              | •       | •           |
| Dry bonding gutters (high)           |                  | •       |          |                      |                |         | •           |
| Dry bonding gutters (low)            | •                |         |          | •                    | •              | •       |             |
| <b>DRY VERGE</b>                     |                  |         |          |                      |                |         |             |
| Cloak verge system                   | •                |         |          | •                    |                |         |             |
| Edgemere dry verge                   |                  |         |          |                      | •              |         |             |
| Continuous dry verge                 | •                |         |          | •                    | •              | •       |             |
| Ashmore dry verge                    |                  |         |          |                      |                | •       |             |
| <b>DRY HIP</b>                       |                  |         |          |                      |                |         |             |
| Dry hip system                       |                  |         |          |                      | •              | •       | •           |
| <b>DRY VALLEY</b>                    |                  |         |          |                      |                |         |             |
| Plain valley tiles                   | •                |         |          | •                    |                |         |             |
| <b>VENTILATED DRY RIDGE</b>          |                  |         |          |                      |                |         |             |
| Ventilated dry ridge                 |                  |         |          |                      | •              | •       | •           |
| Ventilated mono dry ridge            |                  |         |          |                      | •              | •       | •           |
| Ridge roll vent                      |                  |         | •        |                      |                |         |             |
| <b>ABUTMENT SYSTEMS</b>              |                  |         |          |                      |                |         |             |
| Top abutment ventilation system      |                  |         |          |                      | •              | •       | •           |
| Dry soakers                          | •                |         |          | •                    | •              | •       | •           |
| Flexfast Lead replacement roll       | •                | •       | •        | •                    | •              | •       | •           |
| <b>VENTILATION TERMINALS</b>         |                  |         |          |                      |                |         |             |
| Gas vent ridge terminals             |                  |         |          | •                    | •              | •       | •           |
| Ridge vent terminals                 |                  |         |          | •                    | •              | •       | •           |
| In-line vents and contour vents      | •                | •       |          | •                    | •              | •       | •           |
| Tile vent terminals                  |                  |         |          |                      | •              |         |             |
| Ventilation roof tile                |                  |         |          |                      |                | •       |             |
| Ridge vent for condensing boiler     |                  |         |          | •                    | •              | •       | •           |
| <b>SOLARTILE®</b>                    |                  |         |          |                      |                |         |             |
| Roof Defence                         | •                | •       | •        | •                    | •              | •       | •           |

Subject to minimum rafter length and roof pitch requirements – contact the Technical Advisory Service for assistance.

# SYSTEM SELECTOR

|                                      | ANGLIA | DOUBLE ROMAN | LUDLOW MAJOR | MENDIP | MENDIP 12.5 | WESSEX | MODERN &<br>DUO MODERN |
|--------------------------------------|--------|--------------|--------------|--------|-------------|--------|------------------------|
| <b>UNIVERSAL ROOFING ACCESSORIES</b> |        |              |              |        |             |        |                        |
| 10mm eaves vent system               | •      | •            | •            | •      |             | •      | •                      |
| 25mm eaves vent system               | •      | •            | •            | •      | •           | •      | •                      |
| Dry verge                            | •      | •            | •            | •      | •           | •      | •                      |
| HipFast                              | •      | •            | •            | •      | •           | •      | •                      |
| RidgeFast                            | •      | •            | •            | •      | •           | •      | •                      |
| Tile vent                            | •      | •            | •            | •      |             | •      | •                      |
| GRP dry valley system (high)         | •      | •            | •            | •      |             | •      |                        |
| GRP dry valley system (low)          |        |              |              |        |             |        | •                      |
| Underlays                            | •      | •            | •            | •      | •           | •      | •                      |
| Dry bonding gutters (high)           | •      | •            | •            | •      |             | •      |                        |
| Dry bonding gutters (low)            |        |              |              |        |             |        | •                      |
| <b>DRY VERGE</b>                     |        |              |              |        |             |        |                        |
| Cloak verge system                   |        | •            |              | •      |             |        | •*                     |
| Edgemere dry verge                   |        |              |              |        |             |        |                        |
| Continuous dry verge                 |        |              |              |        |             |        |                        |
| Ashmore dry verge                    |        |              |              |        |             |        |                        |
| <b>DRY HIP</b>                       |        |              |              |        |             |        |                        |
| Dry hip system                       | •      | •            | •            | •      | •           | •      | •                      |
| <b>DRY VALLEY</b>                    |        |              |              |        |             |        |                        |
| Plain valley tiles                   |        |              |              |        |             |        |                        |
| <b>VENTILATED DRY RIDGE</b>          |        |              |              |        |             |        |                        |
| Ventilated dry ridge                 | •      | •            | •            | •      | •           | •      | •                      |
| Ventilated mono dry ridge            | •      | •            | •            | •      | •           | •      | •                      |
| Ridge roll vent                      |        |              |              |        |             |        |                        |
| <b>ABUTMENT SYSTEMS</b>              |        |              |              |        |             |        |                        |
| Top abutment ventilation system      | •      | •            | •            | •      | •           | •      | •                      |
| Dry soakers                          |        |              |              |        |             |        | •                      |
| Flexfast Lead replacement roll       | •      | •            | •            | •      | •           | •      | •                      |
| <b>VENTILATION TERMINALS</b>         |        |              |              |        |             |        |                        |
| Gas vent ridge terminals             | •      | •            | •            | •      | •           | •      | •                      |
| Ridge vent terminals                 | •      | •            | •            | •      | •           | •      | •                      |
| In-line vents and contour vents      | •      | •            | •            | •      |             | •      | •                      |
| Tile vent terminals                  |        | •            | •            | •      |             | •      | •                      |
| Ventilation roof tile                |        |              |              |        |             |        |                        |
| Ridge vent for condensing boiler     | •      | •            | •            | •      |             | •      | •                      |
| <b>SOLARTILE®</b>                    |        |              |              |        |             |        |                        |
| Roof Defence                         | •      | •            | •            | •      |             | •      | •                      |
|                                      | •      | •            | •            | •      | •           | •      | •                      |


Subject to minimum rafter length and roof pitch requirements – contact the Technical Advisory Service for assistance.

\* Suitable for Modern only.



# FIXINGS

## BATTEN END CLIPS



These are for use with all dry verge units. Easily fitted to the batten end, they provide easy, fast and positive fixing of dry verge units to the batten end. Compliant with BS 8612.

Batten end clip

30214

## UNIVERSAL EAVES CLIP



Complies with BS 5534 and is suitable for most concrete or clay tiles. Strong and durable, the Universal eaves clip adjusts to roof pitch.

Universal eaves clip

30279

## SOLOFIX



SoloFix is a one-piece clip and nail for all standard interlocking tiles, providing an affordable fixing that not only installs up to 30% faster than traditional clips, but delivers outstanding strength and durability.

Manufactured from Zial®, an integrated clip and nail that is quick and simple to install.

| Profile            | Pack size (500)<br>Code No. | Pack size (100)<br>Code No. |
|--------------------|-----------------------------|-----------------------------|
| Anglia             | 30434                       | 30444                       |
| Double Roman       | 30433                       | 30443                       |
| Duo Modern         | 30430                       | 30440                       |
| Edgemere range     | 30431                       | 30441                       |
| Lincoln            | 30436                       | 30446                       |
| Ludlow Major       | 30430                       | 30440                       |
| Ludlow Plus        | 30430                       | 30440                       |
| Mendip/Mendip 12.5 | 30432                       | 30442                       |
| Modern             | 30430                       | 30440                       |
| Wessex             | 30432                       | 30442                       |

## ZIAL® (ZINC-ALUMINIUM) COATED CLIPS



| Description      | Code No. | Pack size |
|------------------|----------|-----------|
| Wessex head clip | 43610    | 50        |
| Mendip head clip | 43620    | 250       |

## ALUMINIUM VERGE AND EAVES CLIP PACKS

| Profile            | Right hand verge clip and<br>nail pack – 50 clips and nails<br>Code No. | Left hand verge clip and<br>nail pack – 50 clips and nails<br>Code No. | Eave clip and nail pack<br>100 clips and nails<br>Code No. |
|--------------------|-------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------------------------------------|
| Anglia             | 30284                                                                   | 30286                                                                  | 30274                                                      |
| Ashmore            | 30263                                                                   | 30263                                                                  | 30297                                                      |
| Double Roman       | 30289                                                                   | 30290                                                                  | 30275                                                      |
| Duo Modern         | 30290                                                                   | 30290                                                                  | 30273                                                      |
| Edgemere range     | 30263                                                                   | 30263                                                                  | 30297                                                      |
| Lincoln            | 30284                                                                   | 30286                                                                  | 30452*†                                                    |
| Ludlow Major       | 30287                                                                   | 30287                                                                  | 30277                                                      |
| Ludlow Plus        | 30290                                                                   | 30290                                                                  | 30277                                                      |
| Mendip/Mendip 12.5 | 30288                                                                   | 30287                                                                  | 30276                                                      |
| Modern             | 30290                                                                   | 30290                                                                  | 30273                                                      |
| Universal          | –                                                                       | –                                                                      | 30279*†                                                    |
| Wessex             | 30286                                                                   | 30286                                                                  | 30278                                                      |

\* Clips only † Need to purchase nails (30455)

## ALUMINIUM NAIL PACKS

| Profile        | Code No. | Pack No. | Quantity |
|----------------|----------|----------|----------|
| Anglia         | 30349    | 26       | 520      |
| Ashmore        | 30398    | 31       | 432      |
| Double Roman   | 30351    | 28       | 308      |
| Duo Modern     | 30350    | 27       | 396      |
| Edgemere range | 30398    | 31       | 432      |
| Lincoln        | 30349    | 26       | 520      |
| Ludlow Major   | 30371    | 32       | 373      |
| Ludlow Plus    | 30350    | 27       | 396      |
| Mendip         | 30352    | 29       | 287      |
| Modern         | 30350    | 27       | 396      |
| Plain          | 30348    | 25       | 793      |


## STAINLESS STEEL FIXINGS

| Description         | Code No. | Pack size |
|---------------------|----------|-----------|
| Ashmore fixing clip | 30130    | 100       |
| Ashmore Solo clip   | 30141    | 250       |

# OTHER BS 5534 SOLUTIONS

BS 5534 is the British Standard for Slating and Tiling and provides the industry with guidance on best practice relating to the installation of roofs.


MORTAR BEDDED SECURITY RIDGE

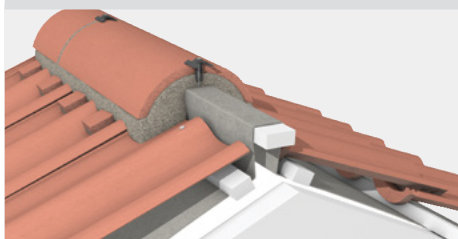

Mechanical fixing system for mortar bedded ridge tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

|                                                                                        |       |
|----------------------------------------------------------------------------------------|-------|
| Mortar bedded security ridge kit (illustrated above) 54365                             |       |
| - 10 No. batten brackets                                                               |       |
| - 13 No. clamps                                                                        |       |
| - 13 No. 75mm x 4.8mm s/s screws                                                       |       |
| - 40 No. 25mm x 2.65mm s/s ARS nails                                                   |       |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay half round ridge with profiled tiles) | 70000 |

MORTAR BEDDED SECURITY HIP

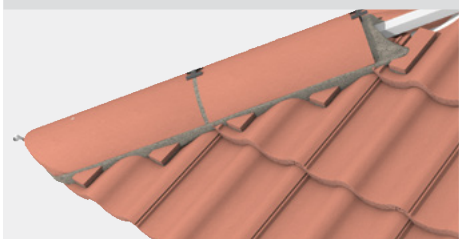

Mechanical fixing system for mortar bedded hip tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

|                                                                                        |       |
|----------------------------------------------------------------------------------------|-------|
| Mortar bedded security hip kit (illustrated above) 54366                               |       |
| - 6 No. batten brackets                                                                |       |
| - 13 No. clamps                                                                        |       |
| - 13 No. 75mm x 4.8mm s/s screws                                                       |       |
| - 40 No. 25mm x 2.65mm s/s ARS nails                                                   |       |
| Tile tail clip pack (20 No.)                                                           | 43602 |
| Tile head clip pack (20 No.)                                                           | 43604 |
| 100mm x 4.8mm deep ridge screw pack<br>(for clay half round ridge with profiled tiles) | 70000 |
| Secret cut tile clip pack (50 No.)                                                     | 43607 |

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



# Shingles & Shakes

# SHINGLES

A truly renewable and sustainable roofing and cladding material.

lowpitch



## TECHNICAL DATA

|                         |                                                                                                                                                                    |                                        |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------|
| Length                  | 400mm                                                                                                                                                              |                                        |
| Width                   | 75-350mm (random)                                                                                                                                                  |                                        |
| Pitch and gauge         | 14-21° at 95mm gauge (roof)<br>22-74° at 125mm gauge (roof)                                                                                                        | 75-90° at 175mm gauge (vertical)       |
| Maximum pitch           | 90°                                                                                                                                                                |                                        |
| Thickness               | 10mm at the butt, tapering                                                                                                                                         |                                        |
| Covering (bundle)       | 1.73m² at 95mm gauge (roof)<br>2.28m² at 125mm gauge (roof)                                                                                                        | 3.2m² at 175mm gauge (vertical)        |
| Laid weight (approx.)*  | 8.1kg/m² at 95mm gauge (roof)<br>6.1kg/m² at 125mm gauge (roof)                                                                                                    | 4.0kg/m² at 175mm gauge (vertical)     |
| Battens required (net)  | 10.5 lin.m/m² at 95mm gauge (roof)<br>8.0 lin.m/m² at 125mm gauge (roof)                                                                                           | 5.7 lin.m/m² at 175mm gauge (vertical) |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |                                        |
| Fixings                 | Annular Ringshank Stainless steel or silicon bronze nails – 31 x 1.8mm                                                                                             |                                        |
| Authority               | Cedar Shake and Shingle Bureau                                                                                                                                     |                                        |

The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

\* Laid weights shown are for 'clean' untreated shingles.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



# SHAKES

Premier No. 1 Grade Blue Label Western Red Cedar Shake for roofing and cladding.

lowpitch



## TECHNICAL DATA

|                         |                                                                                                                                                                    |
|-------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Length                  | 600mm                                                                                                                                                              |
| Width                   | 75-300mm (random)                                                                                                                                                  |
| Pitch and gauge         | 20°-74° at 190mm gauge (roof)<br>75°-90° at 250mm gauge (vertical)                                                                                                 |
| Maximum pitch           | 90°                                                                                                                                                                |
| Thickness               | 19mm at the butt, tapering                                                                                                                                         |
| Covering (bundle)       | 1.39m² at 190mm gauge (roof)<br>2.12m² at 250mm gauge (vertical)                                                                                                   |
| Laid weight (approx.)*  | 9.4kg/m² at 190mm gauge (roof)<br>6.1kg/m² at 250mm gauge (vertical)                                                                                               |
| Battens required (net)  | 5.3 lin.m/m² at 190mm gauge (roof)<br>3.5 lin.m/m² at 250mm gauge (vertical)                                                                                       |
| Batten size recommended | 38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534)<br>50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534) |
| Fixings                 | Annular Ringshank Stainless steel or silicon bronze nails – 45 x 2.65mm                                                                                            |
| Authority               | Cedar Shake and Shingle Bureau                                                                                                                                     |

The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

\* Laid weights shown are for 'clean' untreated shakes.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



  
Marley  
Weatherboard

Light Grey


FIND OUT MORE  [marley.co.uk](https://marley.co.uk)

# MARLEY WEATHERBOARD

Marley Weatherboard is our exciting range of fibre cement cladding products, offering a beautifully textured woodgrain effect finish with quality and durability that stands the test of time. Weatherboard has all the benefits of timber with none of the worries about rot, maintenance and repainting.



## COLOUR AVAILABILITY



## TECHNICAL DATA





|                  |                                      |
|------------------|--------------------------------------|
| Size of plank    | 3600mm x 200mm                       |
| Thickness        | 8mm                                  |
| Fire rating      | A2-s1, d0                            |
| Lap              | 30-50mm                              |
| Maximum gauge    | 100mm (roof)                         |
| Coverage         | 1.63 boards per m <sup>2</sup> (max) |
| Finish           | Woodgrain effect                     |
| Weight per board | 8.6kg                                |

## ADVANTAGES


- ▲ Contemporary and versatile
- ▲ 5 colours available
- ▲ Wider boards provide greater covering capacity (1.63 boards/m<sup>2</sup> at 30mm lap)
- ▲ Simple and economical to install using handheld power tools
- ▲ Meets the durability requirements of BS EN 12467\*
- ▲ BRE fire safety classification A2-s1, d0
- ▲ Compatible for use with rainscreen insulation for improved thermal performance
- ▲ Suitable for residential and commercial applications
- ▲ UL Solutions certified (R41360-1)

## WEATHERBOARD ACCESSORIES

Available in all colours to match the Marley Weatherboard range.



\* Fibre-cement flat sheets – product specification and test methods

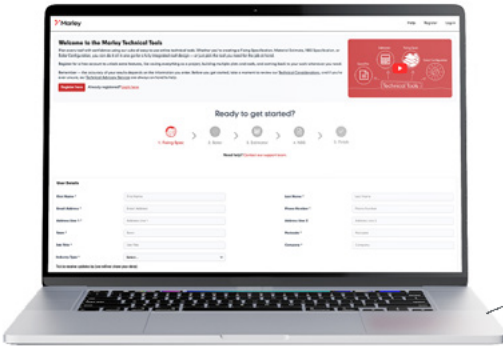

# Marley Technical Tools

Plan every roof with confidence using our suite of easy-to-use online technical tools.

Whether you're an architect, house builder, merchant or installer, these tools have been developed to guide you every step of the way to help you plan, Specify and estimate with confidence, create accurate fixing specifications, estimates and NBS documentation built around real project requirements and industry standards.

[technical.marley.co.uk](https://technical.marley.co.uk)



Fixing Spec



Solar



Estimator



NBS



Finish







# Here to help



## CUSTOMER SERVICES

For our trading customers, our knowledgeable and friendly staff are able to offer quotations, expert advice, deal with orders and all other enquiries.

Call **01283 722849**



## TECHNICAL ADVICE

The best roofing systems and product solutions demand the best technical advice and back up. Our experience and knowledge are second to none.

Contact our Technical Advisory Team: **01283 722330**



## SAMPLES

Experiencing the vast variety of textures and colours that our roof tiles provide up close can guide you in the decision-making process when selecting roof coverings. Our efficient sample service can help you in this process.

[marley.co.uk/samples](http://marley.co.uk/samples)



## NATIONAL COVERAGE

We have experts on hand across the country that understand the local vernacular and can help you design a bespoke roofing system for your project.

Find your local specialist by visiting [marley.co.uk/contact-us](http://marley.co.uk/contact-us)



## TRAINING & CPDS

We offer a range of online and practical training courses for merchants and installers. Also our RIBA accredited CPD courses provide in-depth knowledge and understanding of key roofing products.

[marley.co.uk/training](http://marley.co.uk/training)



# MINIMUM ORDER QUANTITIES

| Clay plain tiles           | No.<br>per band | No. of bands<br>per pallet | Qty.<br>per pallet | Min.<br>order qty. |
|----------------------------|-----------------|----------------------------|--------------------|--------------------|
| Acme/Hawkins tiles         | 12              | 105                        | 1260               | per pallet         |
| Acme/Hawkins eaves         | 15              | 100                        | 1500               | per band           |
| Acme/Hawkins gables        | 12              | 63                         | 756                | per band           |
| Canterbury handmade tiles  | n/a             | n/a                        | 860                | per pallet         |
| Canterbury handmade eaves  | n/a             | n/a                        | 860                | 1                  |
| Canterbury handmade gables | n/a             | n/a                        | 560                | 1                  |
| Creasing tiles             | n/a             | n/a                        | 1260               | per pallet         |

## Clay Pantiles

|                  |   |    |     |            |
|------------------|---|----|-----|------------|
| Lincoln pantiles | 4 | 99 | 396 | per pallet |
|------------------|---|----|-----|------------|

## Concrete tiles

|                       |    |     |      |            |
|-----------------------|----|-----|------|------------|
| Anglia                | 38 | 12  | 456  | per pallet |
| Ashmore               | 6  | 46  | 276  | per pallet |
| Double Roman          | 32 | 6   | 192  | per pallet |
| Edgemere range        | 40 | 6   | 240  | per pallet |
| Ludlow Major          | 36 | 6   | 216  | per pallet |
| Ludlow Plus           | 43 | 12  | 516  | per pallet |
| Mendip range          | 32 | 6   | 192  | per pallet |
| Modern and Duo Modern | 32 | 6   | 192  | per pallet |
| Plain tiles           | 10 | 90  | 900  | per pallet |
| Plain eaves/top       | 10 | 120 | 1200 | per band   |
| Plain tile and half   | 10 | 54  | 540  | per band   |
| Wessex                | 32 | 6   | 192  | per pallet |

## Concrete fittings

|                          |   |    |     |            |
|--------------------------|---|----|-----|------------|
| Segmental ridge          | 5 | 24 | 120 | per pallet |
| Segmental security ridge | 5 | 24 | 120 | per pallet |
| Modern ridge             | 5 | 28 | 140 | per pallet |
| Modern security ridge    | 5 | 28 | 140 | per pallet |
| Third round hip ridge    | 5 | 28 | 140 | per pallet |

| Feature tiles      | No.<br>per band | Min.<br>order qty. |
|--------------------|-----------------|--------------------|
| <b>Acme</b>        |                 |                    |
| Red Smooth         | 12              | per band           |
| Mixed Brindle      | 12              | per band           |
| Red Sandfaced      | 12              | per band           |
| Farmhouse Brown    | 12              | per band           |
| Heather Blend      | 12              | per band           |
| Autumn Brindle     | 12              | per band           |
| Heather Sandfaced  | 12              | per band           |
| Aylesham Mix       | 12              | per band           |
| Ashurst            | 12              | per band           |
| Weathered          | 12              | per band           |
| <b>Hawkins</b>     |                 |                    |
| Dark Heather       | 12              | per band           |
| Staffordshire Mix  | 12              | per band           |
| Staffordshire Blue | 12              | per band           |
| Blue Smooth        | 12              | per band           |
| Fired Sienna       | 12              | per band           |
| <b>Canterbury</b>  |                 |                    |
| Loxleigh           | loose           | 10                 |

Any tile colours not listed are sold loose.

| Shingles | No. of bundles<br>per pallet | Min.<br>order qty. |
|----------|------------------------------|--------------------|
| Shakes   | 20                           | 1 bundle           |
| Shingles | 24                           | 1 bundle           |

| Battens*  | No.<br>per bundle | No. of bundles<br>per pack | Quantity<br>per pack |
|-----------|-------------------|----------------------------|----------------------|
| 19 x 38mm | 10                | 70                         | 700                  |
| 25 x 38mm | 10                | 56                         | 560                  |
| 25 x 50mm | 10                | 44                         | 440                  |

\* Order per pack – Min. quantity 10 packs

| Weatherboard | Quantity<br>per pallet | Min.<br>order qty. |
|--------------|------------------------|--------------------|
| Black        | 250                    | per pallet         |
| Slate Grey   | 250                    | per pallet         |
| Light Grey   | 250                    | per pallet         |
| Blue Grey    | 250                    | per pallet         |
| White        | 250                    | per pallet         |

# MANUFACTURING & STOCKING LOCATIONS

## KEY

|                  |              |
|------------------|--------------|
| Clay plain tiles | Timber       |
| Clay pantiles    | Solar        |
| Concrete         | Weatherboard |

### 1 GLASGOW

Marley Ltd, Kirkintilloch Road, Cadder,  
Bishopbriggs, Glasgow G64 2PY

Open for collections

Mon-Thur: 6:30am - 3:00pm\*

Fri: 6:30am - 2:30pm

### 2 GAINSBOROUGH

Marley Ltd, Old Shipyard, Beckingham,  
Gainsborough DN21 1NG

Open for collections

Mon-Fri: 7:00am - 4:00pm

### 4 BURTON

Marley Ltd, Lichfield Road,  
Branston, Burton upon Trent DE14 3HD

Open for collections

Mon-Thur: 7:00am - 3:00pm

Fri: 7:00am - 2:00pm

### 6 BEENHAM

Marley Ltd, Grange Lane, Bath Road,  
Beenham, Reading RG7 5PU

Open for collections

Mon-Fri: 7:00am - 3:30pm



### 3 KEELE

Marley Ltd, Ridgehill Drive,  
Madeley Heath, Crewe,  
Cheshire CW3 9LY

Open for collections

Mon-Fri: 7:30am - 4:00pm

### 5 BRIDGEND

Marley Ltd, St Mary's Hill,  
Mynydd Ruthin, Bridgend,  
Mid Glamorgan CF35 5DU

Open for collections

Mon-Fri: 8:00am - 4:00pm

### 7 AYLESFORD\*\*

Marley Ltd, Unit 1, Bellingham Way,  
Panattoni Park, Aylesford,  
Kent ME20 7WT

Open for collections

Mon-Fri: 7:30am - 4:00pm

\* Last load accepted at 2.30pm \*\* Collections only

## NOTES

This publication is based on the latest data available at the time of printing. Due to product changes, improvements, users and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications, users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples. Superficial surface characteristics including efflorescence, shade variations, scratches and abrasions are permissible surface characteristics and do not affect the long-term performance and durability of the roofing products. Changes in colour and appearance can occur during service under the influence of natural weathering.

Updates since April 2025 (V3.01.04.2026): Updated weight of Vapour permeable underlay from 170g underlay to 200g. Removal of EV charger.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



## Tell me more

Call 01283 722588

Email [info@marley.co.uk](mailto:info@marley.co.uk)

Or visit [marley.co.uk](http://marley.co.uk)

Marley, Lichfield Road, Branston, Burton upon Trent, DE14 3HD

