



# Product catalogue




SEPTEMBER 2025

# It's **more** than a roof

It's a Marley Solar Roof System.



LEARN MORE

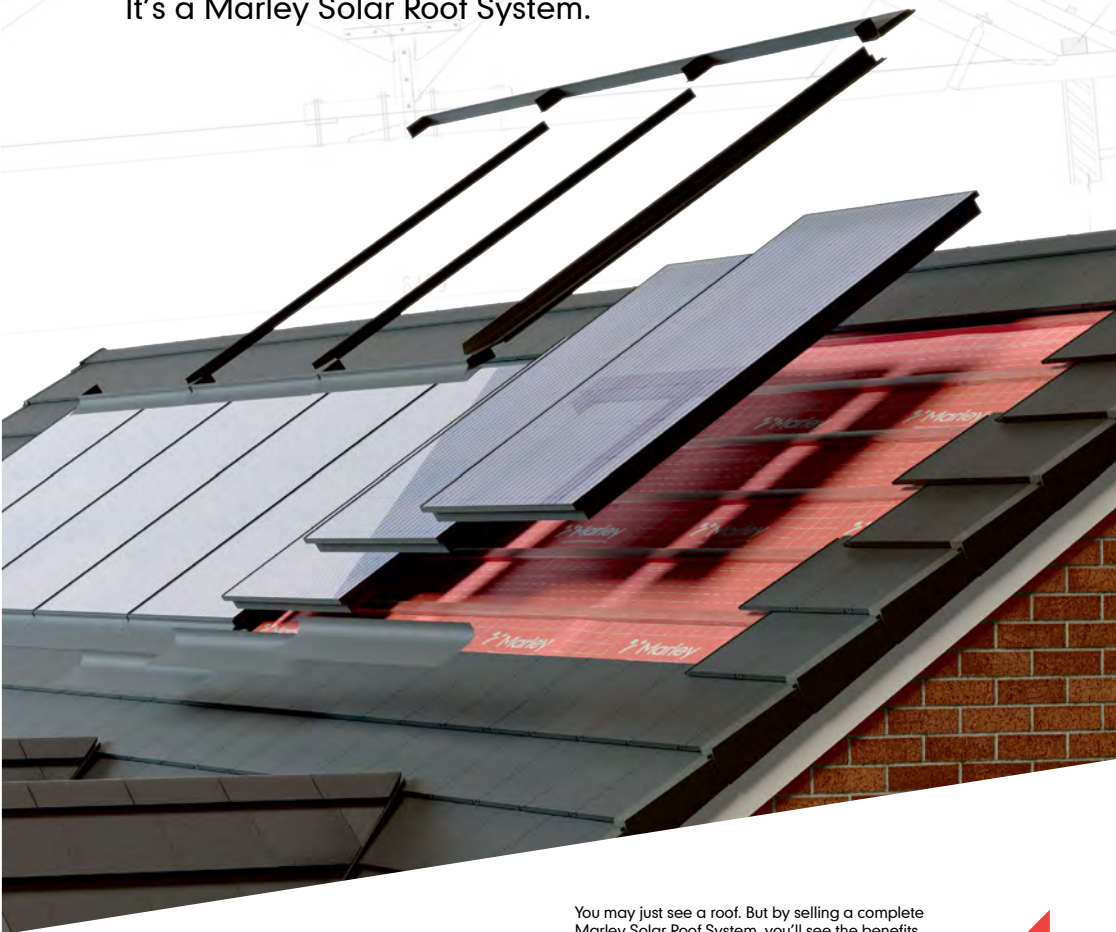

You may just see a roof. But by selling a complete Marley Solar Roof System, you'll see the benefits of stocking all products from a single manufacturer, whilst making the most of the growing demand for roof integrated solar panels.

It's more than a roof.



[marley.co.uk](http://marley.co.uk)

**15  
YEAR**

MARLEY ROOF  
SYSTEM WARRANTY

FIND OUT MORE  [marley.co.uk](http://marley.co.uk)

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

We want to make your project, or that of your client, as straightforward and successful as possible, so we're on hand to offer practical, experienced support in a range of useful ways.

This can be delivering urgent samples where and when they're needed, providing products that help you achieve an A+ rating and gain credits for your buildings, supplying bespoke fixing specifications, offering complete dry fixed ventilation solutions and much more.

In short, we're here to support you in any way we can and we're always happy to take some of the load off your shoulders.

Trust Marley to take the hassle out of roofing. If you ever need advice on any roofing related issue, you can rely on our team to give you a helping hand.



**Find a stockist**  
visit [marley.co.uk/stockists](http://marley.co.uk/stockists)



**Find an installer**  
visit [marley.co.uk/installers](http://marley.co.uk/installers)

## CONTENTS

- 4 THE MARLEY ROOF SYSTEM
- 6 JB RED BATTENS
- 8 BATTENS
- 9 UNIVERSAL UNDERLAYS
- 10 PRODUCT SELECTOR
- 12 SOLAR AND RENEWABLES
- 16 CLAY PLAIN TILES AND FITTINGS
- 28 CLAY PANTILES AND FITTINGS
- 30 CONCRETE TILES AND FITTINGS
- 47 DRY FIX & VENTILATION SYSTEMS
- 60 DRY FIX & VENTILATION SYSTEM SELECTOR
- 62 FIXINGS
- 65 SHINGLES AND SHAKES
- 68 MARLEY WEATHERBOARD
- 70 HERE TO HELP
- 72 MINIMUM ORDER QUANTITIES
- 74 MANUFACTURING & STOCKING LOCATIONS



All factories certified  
to ISO 9001, ISO 14001,  
OHSAS 45001



# Tell me more

Call 01283 722588  
Email [info@marley.co.uk](mailto:info@marley.co.uk)  
Or visit [marley.co.uk](http://marley.co.uk)

FIND OUT MORE  [marley.co.uk](http://marley.co.uk)

# THE MARLEY ROOF SYSTEM

We offer the most comprehensive roof system on the market, covered by a 15 year warranty.

Our dry fix, ventilation and solar solutions are a key part of our roof system, enabling flexibility in design and detailing; offering weatherproofing, security and refined aesthetics, as well as providing excellent levels of ventilation.

## 01 DRY RIDGE SYSTEMS

Universal RidgeFast system  
(page 53)

Ventilated dry ridge system  
(page 53)

Dry mono ridge system  
(page 54)

## 02 RIDGE VENT TERMINALS

(page 54)

## 03 DRY VERGE SYSTEMS

Universal dry verge system  
(page 49)

Edgemere dry verge system  
(page 49)

Ashmore dry verge system  
(page 50)

Continuous dry verge system  
(page 50)

Cloak verge systems (page 51)

## 04 EAVES SYSTEMS

25mm eaves vent system

10mm eaves vent system

(page 48)


## 05 DRY HIP SYSTEMS

Universal HipFast system  
(page 52)


Dry hip system (page 52)

## 06 DRY VALLEY SYSTEM

Universal dry valley system  
(page 51)

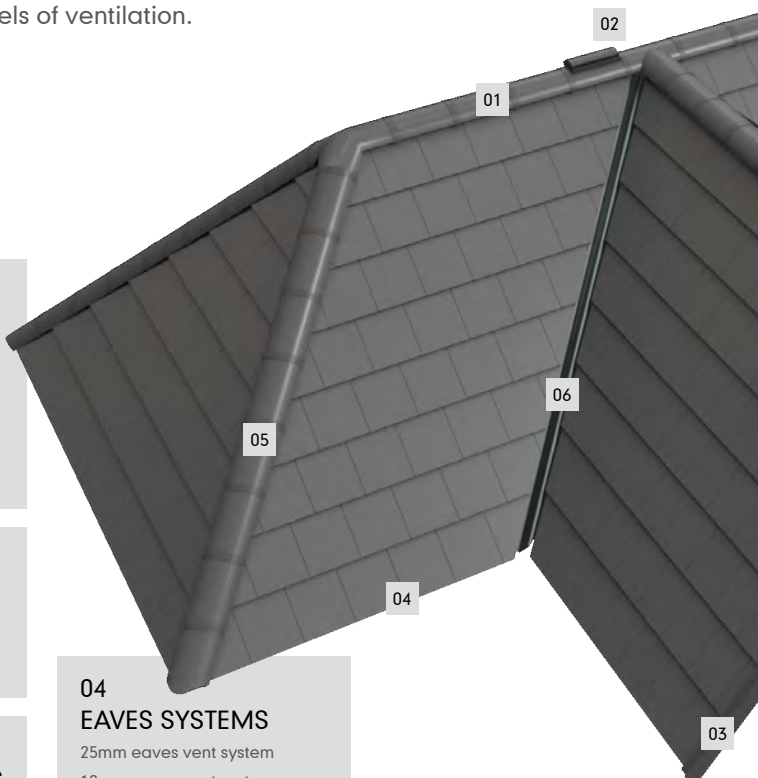



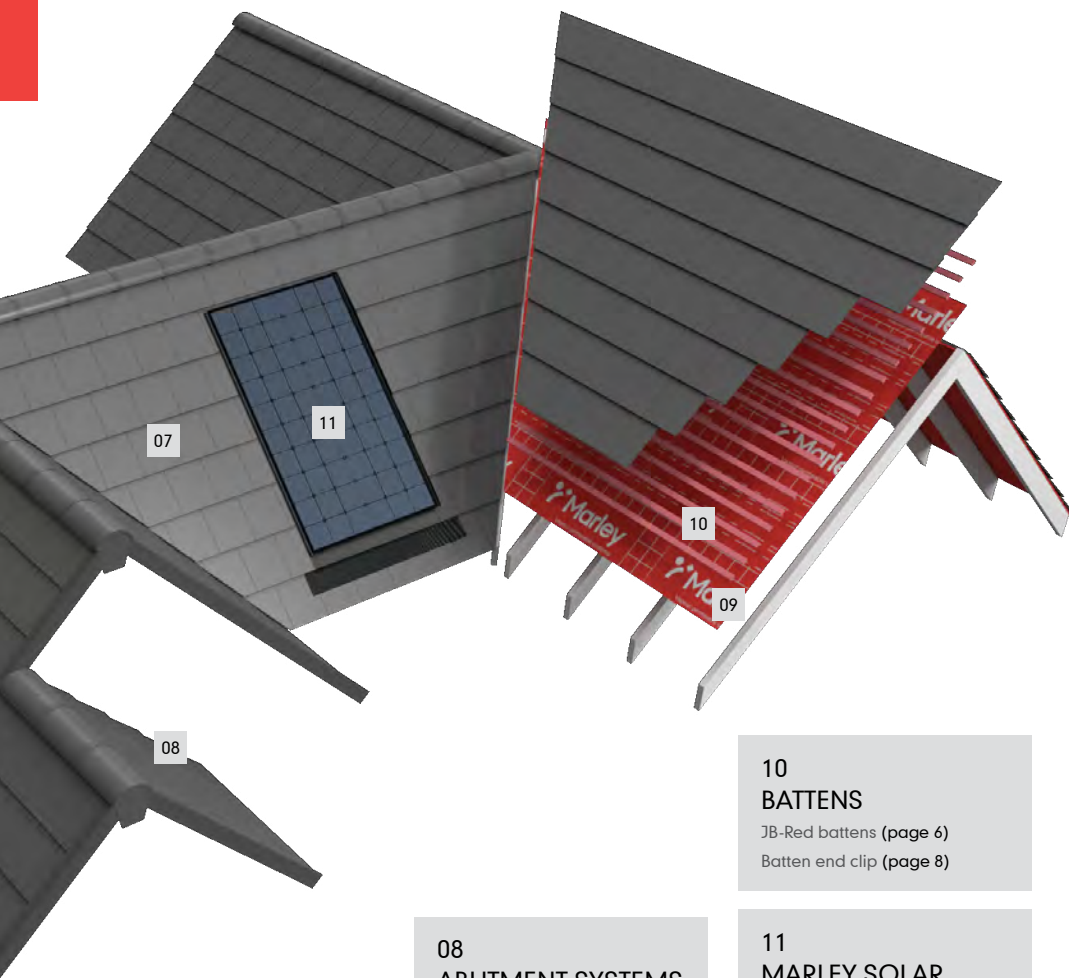

## 07 ROOF SLOPE SYSTEMS

Universal tile vent and contour vent terminals (page 57)  
Tile ventilation terminals (page 58)  
Contour and in-line vents (page 58)

## 08 ABUTMENT SYSTEMS

Top abutment ventilation system (page 55)  
Dry fix soakers (page 55)  
Lead replacement roll (page 56)

## 09 UNDERLAYS

Universal vapour permeable  
Universal non-breathable (page 9)

## 10 BATTENS

JB-Red battens (page 6)  
Batten end clip (page 8)

## 11 MARLEY SOLAR RENEWABLES

A range of PV solar tiles fittings, batteries, inverters and other accessories to provide complete renewable energy systems from roof to road.  
(pages 12-15)

## ALSO AVAILABLE:

GRP bonding gutters (page 56)  
Slate accessories (page 59)

# JB RED BATTENS



Only battens that have been pre or factory graded to BS 5534 can be called or used as 'Roofing Battens'.


JB Red completely meets the BS 5534 and NHBC requirements for fully graded roofing battens and it is the only UK factory graded roof batten certified by the BBA (Certificate 19/5668). The battens are exceptionally strong and have full chain of custody certification and JB Red was the first roofing batten to achieve CCPI verification.

Its distinctive red colour means that it is highly visible on site, therefore Local Authority Building Control, NHBC and other inspectors can see that high quality, pre-graded and compliant battens have been used.

JB Red is manufactured using a state of the art, high speed camera and laser grading machine to ensure consistent levels of size and quality.

JB Red is Kopper's MicroPro® treated and carries a 60 year life expectancy against attack by wood rotting fungi and insects.



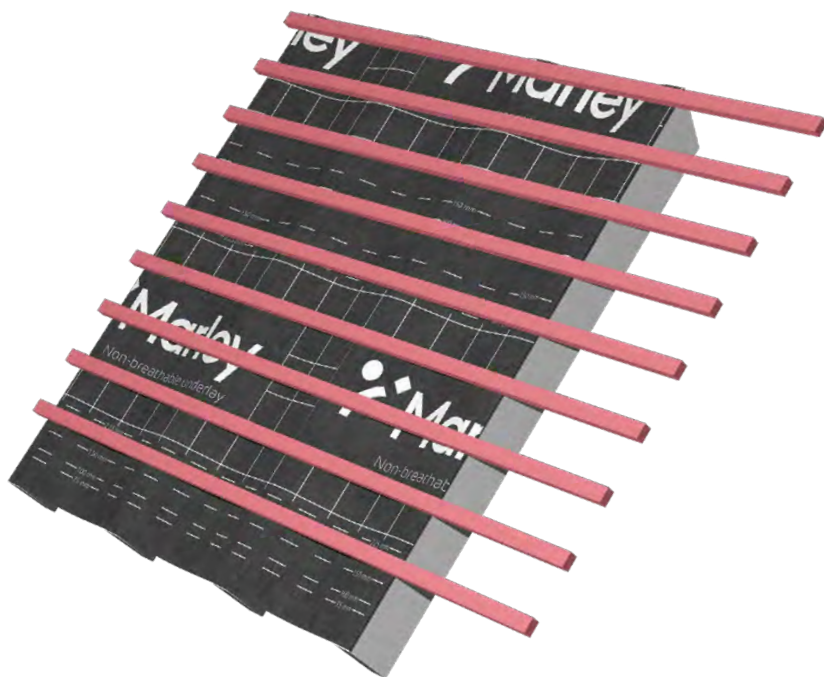

## BENEFITS OF JB RED

- ▲ Pre-graded to all the size and strength requirements of BS 5534 for roofing battens. No further grading is required.
- ▲ Manufactured from slow grown, high grade timber and marked according to BS 5534 showing supplier name, origin/species, grade and size
- ▲ Only kiln dried sideboard timber is used to ensure stability and dimensional accuracy
- ▲ Reduced wastage through state of the art mechanical grading
- ▲ The product and process are UKAS third party assessed by the BBA with a BBA Agrément certificate (19/5668)
- ▲ JB Red is CCPI verified (001500013/1025)
- ▲ Treated to BS 8417 Usage Class 2, using Koppers MicroPro® with a unique red colour
- ▲ 60 year life expectancy against insect attack and wood rotting fungi (when installed correctly in accordance with the requirements of Usage Class 2)

### JB RED BATTEN SIZES

25mm x 38mm, 25mm x 50mm, 38mm x 50mm,  
50mm x 50mm

# BATTENS



## TYPE A BROWN BATTENS

Type A Brown is a range of traditional standard quality, sawn timber, treated with Kopper MircoPro® brown treatment. Suitable for use as counter battens and for all internal applications.

### TYPE A BROWN BATTEN SIZES

19mm x 38mm, 25mm x 38mm, 25mm x 50mm

## COUNTER BATTENS

Marley counter battens are for matching in with existing battens or when used over wider rafter centres. Available in a selection of sizes and preservative treated.


### COUNTERBATTEN SIZES

6mm x 25mm, 10mm x 38mm

## BATTEN END CLIPS

These are for use with all dry verge units. Easily fitted to the batten end, they provide easy, fast and positive fixing of dry verge units to the batten end.

Compliant with BS 8612.  
Code 30214.



## JB SPECIALTY

Marley offers a full range of roofing timbers, for use above truss or rafter level – all of which are preservative treated.



Lead roll



Corner to  
corner



Feather  
edge/firring

### SIZES

50mm x 50mm Corner to corner  
50mm x 50mm Firring  
50mm x 50mm Lead roll  
75mm x 75mm King roll

## LARGE SECTION ROOFING, COUNTER AND NON-STANDARD BATTENS

Available in a selection of sizes and preservative treated.

### SIZES

38mm x 50mm, 47mm x 50mm

# UNIVERSAL UNDERLAYS

Marley Universal Vapour Permeable and Non-Permeable underlays are high performance roof membranes which are zone 1-5 compliant, in accordance with BS 5534.




## UNIVERSAL VAPOUR PERMEABLE UNDERLAY (LR)

- ▲ Vapour permeable
- ▲ High tensile and tear strength
- ▲ Clean and easy to handle
- ▲ Durable
- ▲ UV resistant
- ▲ BBA approved – certificate no. 19/5678
- ▲ Integrated tape for sealing laps
- ▲ Guidance lines for minimum laps
- ▲ Suitable for vertical applications
- ▲ Fabric weight 170g/m<sup>2</sup>



## UNIVERSAL NON-PERMEABLE UNDERLAY (HR)

- ▲ Non-permeable
- ▲ High tensile and tear strength
- ▲ Clean and easy to handle
- ▲ Durable
- ▲ UV resistant
- ▲ BBA approved – certificate no. 19/5673
- ▲ Lightweight alternative to traditional IF
- ▲ Integrated tape for sealing laps
- ▲ Guidance lines for minimum laps
- ▲ Fabric weight 116g/m<sup>2</sup>



## UNIVERSAL 125 VAPOUR PERMEABLE UNDERLAY (LR)

- ▲ Vapour permeable
- ▲ Integrated tape for sealing laps
- ▲ Excellent resistance to water penetration
- ▲ Clean and easy to handle
- ▲ For roof applications
- ▲ Durable
- ▲ UV resistant
- ▲ Guidance lines for minimum laps
- ▲ Fabric weight 125g/m<sup>2</sup>

Solar and  
renewablesClay plain tiles  
and fittingsClay paniles  
and fittingsConcrete tiles  
and fittingsDry fix and  
ventilationShingles  
and ShakesMarley  
WeatherboardHere to  
Help

# PRODUCT SELECTOR

## MARLEY SOLARTILE® & RENEWABLES



410



ARCBOX



SOLAR KITS



RENEWABLES

Features	High output Sleek aesthetics	Making solar even safer	Comprehensive range	Integrated energy solutions
Size	1134 x 1722mm	n/a	n/a	n/a
Min. pitch	20°	n/a	n/a	n/a
Max. pitch	60°	n/a	n/a	n/a
Peak power	410Wp	n/a	n/a	n/a
Page	13	14	14	15

## CLAY PLAIN TILES



HAWKINS



ACME SINGLE  
CAMBER



CANTERBURY

Features	Machine-made Single camber	Machine-made Single camber	Handmade Single camber
Size	265 x 165mm	265 x 165mm	265 x 165mm
Min. pitch	30°	30°	40°
Max. pitch	90°	90°	90°
No. of colours	5	11	1
Page	17	18	22

## CLAY PANTILES



LINCOLN

## SHINGLES & SHAKES



SHINGLES



SHAKES

## CLADDING



WEATHERBOARD


Features	Clay pantile Open gauge	Machine-cut	Hand split	Durable fibre cement cladding
Size	375 x 250mm	Various	Various	3600 x 200mm
Min. Pitch	15°	14°	20°	n/a
Max. Pitch	70°	90°	90°	n/a
No. Colours	2	1	1	5
Page	29	66	67	68



## CONCRETE TILES



PLAIN



ASHMORE



EDGEMERE



DUO EDGEMERE



RIVEN EDGEMERE

Features	Cross camber	Interlocking double plain tile	Thin leading edge Cost-effective alternative to slate	Thin leading edge Replicates smaller format slates	Thin leading edge Randomised texture
Size	267 x 168mm	267 x 333mm	420 x 330mm	420 x 330mm	420 x 330mm
Min. pitch	35°	22.5°	17.5°	17.5°	17.5°
Max. pitch	90°	90°	90°	90°	90°
No. of colours	8	3	4	4	2
Page	31	32	33	34	35



MODERN



DUO MODERN



MENDIP



MENDIP 12.5



LUDLOW MAJOR

Features	Flat appearance	Flat appearance Replicates smaller format slates	Double pantile	Double pantile Low pitch	Simple, strong lines Ideal for refurbishment
Size	420 x 330mm	420 x 330mm	420 x 330mm	420 x 330mm	420 x 330mm
Min. pitch	17.5° (Smooth)	17.5° (Smooth)	15° (Smooth)	12.5°*	22.5° (Smooth)
Max. pitch	90°	90°	90°	44°	90°
No. of colours	6	2	7	3	6
Page	36	37	38	39	40



LUDLOW PLUS



DOUBLE ROMAN



WESSEX



ANGLIA

Features	Small format Ideal for refurbishment	Traditional profile	Clean lines Water shedding efficiency	Bullnose leading edge Classic pantile
Size	387 x 229mm	420 x 330mm	420 x 330mm	387 x 230mm
Min. pitch	22.5° (Smooth)	22.5° (Smooth)	15°	25° (Smooth)
Max. pitch	90°	90°	44°	90°
No. of colours	5	6	2	3
Page	41	42	43	44

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

# Solar and renewables

# MARLEY SOLARTILE® 410Wp

Designed to form an integral part of the fabric of the roof, this photovoltaic panel delivers a peak power output of 410Wp, along with sleek aesthetics and long-lasting, maintenance-free performance.



## TECHNICAL DATA

Size	1134mm wide x 1722mm high
Aperture area	1.885m²
Minimum pitch*	20°
Maximum pitch	60°
Body thickness	70mm
Weight	25.0kg
Static roof loading	12.8kg/m² (distributed)
Characteristic wind resistance	4.65kPa
Ultimate design load*	4.65kPa
Positive design load (IEC 61215)	5.4kPa
Fire rating EN 13501-5	B <sub>ROOF</sub> (T1, T2, T3, T4)
Authority**	IEC 61215, 61730, TUV, MCS05, MCS12
Compatible roof coverings	All Marley concrete and clay plain, and interlocking tiles. Also compatible with tiles and slates of other manufacturers


## ELECTRICAL DATA

Model	MAPV410-M10
Peak power	410Wp
Efficiency	21.5%
No. of cells	54x2
Max. power voltage (V <sub>mpp</sub> )	31.02V
Max. power current (I <sub>mpp</sub> )	13.06V
Open circuit voltage (V <sub>oc</sub> )	37.23V
Short circuit current 9 (I <sub>sc</sub> )	13.72A
NOCT†	45°C
Cell type	Monocrystalline Silicon
Power temperature co-efficient	-0.35%/°C
Current temperature co-efficient	0.05%/°C
Voltage temperature co-efficient	-0.28%/°C
Max. system voltage	1000 V <sub>DC</sub>
Max. fuse rating	25 A

\* Design resistance to ultimate loads includes a partial material safety factor of 1.0

\*\* Marley SolarTile® is the only roof-integrated solar system accredited with the highest resistance to spread of flame and fire penetration in all European fire tests.

† Nominal operating cell temperature

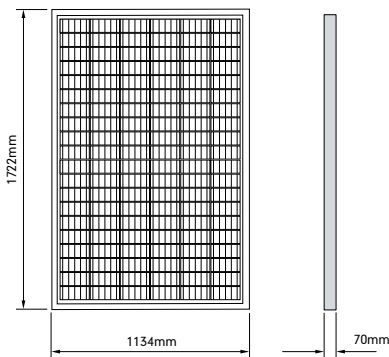

15  
YEAR

25  
YEAR

60  
YEAR

\*MARLEY ROOF SYSTEM WARRANTY

80% EFFICIENCY GUARANTEE

EXPECTED PANEL LIFESPAN

\* Terms and conditions apply




Environmental Product Declaration available

## ARCBOX

### Making solar even safer

The ArcBox enclosure simply snaps around a DC connector to ensure that, if an arc ever occurs, it is safely contained and doesn't spread to combustible materials in or around the solar installation. The effectiveness of the product has been independently verified by the KIWA fire test laboratory and Loughborough University.

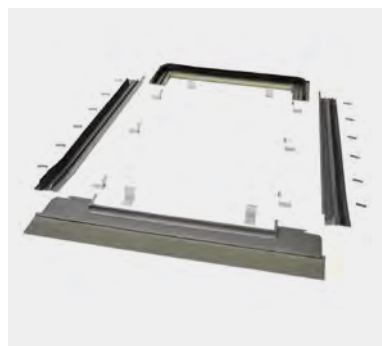

## MARLEY SOLARTILE® KITS

Marley supplies a comprehensive range of fixing/ flashing kits for our 410 SolarTile® to fit varying array layouts. There are also conversion kits to fit around Velux windows and fixing directly to sarking board.



## SOLAR CONFIGURATOR

You can configure your solar array using the Marley Configurator. It will choose the mix of roofing kits required and calculate the kWp output for your roof.

**marley.co.uk**





# MARLEY RENEWABLES

The Marley Solar Roof System provides a sleek, integrated solar solution that combines roof security with solar power generation.

For battery and inverter compatibility contact our Technical Advisory Service on 01283 722330.



## SOLAR INVERTERS

A choice of Solar Inverters to maximise self-consumption of the generated solar energy.

- ✓ Clearline single phase string inverters for residential solar applications from 0.67kWp up to 9.0kWp
- ✓ ES G2 Hybrid Solar Inverter  
Compact and efficient inverter for optimised solar energy back-up



## BATTERY STORAGE

Specially designed for superior performance in residential applications.

- ✓ Lynx Home U Series Battery  
Flexibility for self-consumption and back-up applications, with a wide capacity range scalable from 5.4 – 32.4 kWh



## ELECTRIC VEHICLE CHARGER

Power from the roof to the road.

- ✓ Clearline 7kW EV Charging Point
- ✓ Charge your car with power from your solar panels

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes


Marley  
Weatherboard

Here to  
Help




## Clay plain tiles and fittings

Hawkins Fired Sienna (T)




FIND OUT MORE  [marley.co.uk](https://marley.co.uk)

# HAWKINS



Single cambered (longitudinal), machine-made clay tile, manufactured for over 150 years. This heritage, combined with modern firing techniques, gives a traditional colour range.



## COLOUR AVAILABILITY



**Key**  
(F) Fine sanded finish  
(S) Smooth finish  
(T) Textured finish



## TECHNICAL DATA

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m <sup>2</sup> at 100mm gauge (roof)	53 tiles/m <sup>2</sup> at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof)	56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)	8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm nail	
Authority	BS EN 1304	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles  
Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## PRODUCT INFORMATION

Tile camber  
Single camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†


# ACME SINGLE CAMBER

## STANDARD RANGE


Natural clay, machine-made, single cambered (longitudinal) plain tiles, offering crisp, contemporary lines and the warmth and character of clay at an affordable price.




## COLOUR AVAILABILITY




Red Smooth (S)




Red Sandfaced (F)




Autumn Brindle (S)




Grey Sandfaced (F)




Heather Sandfaced (F)



Heather Blend (F)



Farmhouse Brown  
Sandfaced (F)



Mixed Brindle (S)

### Key

(F) Fine sandfaced finish  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m <sup>2</sup> at 100mm gauge (roof)	53 tiles/m <sup>2</sup> at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof)	56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)	8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm nail	
Authority	BS EN 1304	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.






Mixed Brindle (S)

## PRODUCT INFORMATION

Tile camber  
Single camber



### Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†

## SUSTAINABILITY

✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available



# ACME SINGLE CAMBER

## HERITAGE RANGE

A varied range of traditional clay blends that offer an aged character, unique to every roof.



## COLOUR AVAILABILITY



Key (F) Fine sanded finish

## TECHNICAL DATA

Size of tile	265mm x 165mm	
Minimum pitch*	30°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	11mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m <sup>2</sup> at 100mm gauge (roof)	53 tiles/m <sup>2</sup> at 115mm gauge (vertical)
Weight of tiling (approx.)	64kg/m <sup>2</sup> (0.63 kN/m <sup>2</sup> ) at 100mm gauge (roof)	56kg/m <sup>2</sup> (0.55 kN/m <sup>2</sup> ) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)	8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm nail	
Authority	BS EN 1304	


\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.



Weathered (F)

## PRODUCT INFORMATION

Tile camber  
Single camber



### Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†

## SUSTAINABILITY

✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles Element Ref: 812410006)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available



# CANTERBURY HANDMADE

True to tradition, a distinctive handmade clay plain tile colour, with a fine sanded finish suitable for roofing and vertical tiling.

## COLOUR AVAILABILITY



Key  
(F) Fine sanded finish

## TECHNICAL DATA

Size of tile	265mm x 165mm	
Minimum pitch*	40°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	35mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	13mm (nominal)	
Cover width	165mm (nominal)	
Covering capacity (net)	60 tiles/m <sup>2</sup> at 100mm gauge (roof)	53 tiles/m <sup>2</sup> at 115mm gauge (vertical)
Weight of tiling (approx.)	74kg/m <sup>2</sup> (0.73 kN/m <sup>2</sup> ) at 100mm gauge (roof)	66kg/m <sup>2</sup> (0.64 kN/m <sup>2</sup> ) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m <sup>2</sup> at 100mm gauge (roof)	8.7 lin.m/m <sup>2</sup> at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm nail	
Authority	BS EN 1304	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced clay plain tiles  
Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## PRODUCT INFORMATION

Tile camber  
Single camber



Feature tiles

For advice on the use of feature tiles in main roof areas contact the Technical Advisory Service.

† Made to order



Club†



Bullnose†



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help








Loxleigh (F)

# CLAY FITTINGS & ACCESSORIES







Important note: All the fittings shown on these pages can be used with clay plain tiles.

## PLAIN TILE FITTINGS

					
Description	Tile-and-a-half	Eaves/top tile	Creasing tiles§	Cloaked verge tiles*	External angle tiles**
Angles available	n/a	n/a	n/a	n/a	90°, 135°





## FEATURE TILES

Available in a range of colours, please contact customer services for more information.

						
Description	Club feature tile*	RH club tile-and-a-half*	LH club tile-and-a-half*	Bullnose feature tile*	RH bullnose tile-and-a-half*	LH bullnose tile-and-a-half*

## HIPS AND VALLEYS

Mortar bedded security hip kits are available for third round ridges (see page 64)

				
Description	Granny hip	Semi bonnet hip	Arris hip**	Valley**
Angles available	n/a	n/a	130°, 135°, 145°	130°, 135°, 140°, 145°, 150°
Pitch range	40-60°	30-40°	30-45°	30-50°

\* Made to order (subject to minimum order quantities)



\*\* Some colours and angles made to order (subject to minimum order quantities)

§ Available in Red Smooth.

Note: All measurements in mm.

## VENTILATION

Available in a range of bases with real clay tile slips on the visible edge (2 tiles wide). The clay tile vent provides a net ventilation area of 10,000mm<sup>2</sup> per vent. Suitable for natural, mechanical or soil pipe ventilation.



Description




Clay in-line tile vent

Tile vent adaptor

Flexible pipe

## DECORATIVE RIDGES

Mortar bedded security ridge kits are available (see page 64)



Description

Club crested  
ridge

Cocks comb  
crested ridge

Two hole  
crested ridge

Angles available

90°, 105°

90°, 105°

90°, 105°

Colours available





Red Smooth

Red Smooth

Red Smooth

## CLAY FINIALS

Available in a range of colours and angles. Mortar bedded security ridge kits are available (see page 64)




Description

Ball top finial\*  
Red Smooth

Ball top finial\*  
Red Smooth 90°, 105°  
Slate black 90°, 105°

Fleur-de-Lys gable\*  
Red Smooth

Fleur-de-Lys finial\*  
Red Smooth 90°, 105°  
Slate black 90°, 105°



Description

Scroll finial\*  
Red Smooth

Angle finial\*  
Red Smooth 90°, 105°  
Slate black 90°, 105°

\* Made to order (subject to minimum order quantities)

Note: All measurements in mm.











# CLAY FITTINGS & ACCESSORIES





Important note: All the fittings shown on these pages can be used with clay plain tiles.

## RIDGE AND HIP TILES

Mortar bedded security ridge kits are available (see page 64)

				
Description	Half round ridge	Half round ridge hip end*	Half round ridge stop end*	Mono ridge*
Colours available	All colours	All colours	All colours	All colours
Pitch range‡	30-60°	30-60°	30-60°	30-45°

				
Description	Hogs back ridge	305mm Angular ridge**	305mm Angular ridge stop end*	305mm Angular ridge hip end*
Angles available	n/a	90°, 105°	90°, 105°	90°, 105°
Colours available	Burnished	All colours	All colours	All colours

				
Description	450mm Angular ridge	450mm Angular ridge stop end*	450mm Angular ridge hip end*	450mm Capped angular ridge
Angles available	75°, 90°, 105°, 115°, 125°, 135°	75°, 90°, 105°, 115°, 125°, 135°	75°, 90°, 105°, 115°, 125°, 135°	75°, 90°, 105°, 115°, 125°, 135°
Colours available	Red Smooth, Slate Black	Red Smooth, Slate Black	Red Smooth, Slate Black	Red Smooth, Slate Black, Staffordshire Blue‡

\* Made to order (subject to minimum order quantities)

\*\* Some colours and angles made to order (subject to minimum order quantities)

‡ Staffordshire Blue made to order





† Angle ridge wing length will vary depending on ridge angle

‡ Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

Note: All measurements in mm.

## RIDGE AND HIP TILES

Mortar bedded security ridge kits are available (see page 64)



Description	450mm Capped angular ridge hip end*	450mm Capped angular ridge stop end*	Third round hip**	Third round hip end**
Angles available	75°, 90°, 105°, 115°, 125°, 135°	75°, 90°, 105°, 115°, 125°, 135°	n/a	n/a
Colours available	Red Smooth, Slate Black, Staffordshire Blue	Red Smooth, Slate Black, Staffordshire Blue	All colours	All colours
Pitch range‡			30-45°	30-45°

\* Made to order (subject to minimum order quantities)

† Angle ridge wing length will vary depending on ridge angle

\*\* Some colours and angles made to order (subject to minimum order quantities)

‡ Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

The following dry fix and/or ventilation systems can also be used with clay plain tiles:

- ▲ Universal 10mm and 25mm eaves vent systems (page 48)
- ▲ Continuous dry verge (page 50)
- ▲ Universal plain tile vent (page 57)
- ▲ Universal GRP valley (page 51)
- ▲ Universal RidgeFast system# (page 53)
- ▲ Universal HipFast system# (page 52)

# Subject to ridge/hip fitting.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



## Clay pantiles and fittings

# LINCOLN

Clay interlocking pantiles combining the bold and beautiful curves of traditional clay pantiles with all the installation simplicity and speed required for today's roofs.

lowpitch



## COLOUR AVAILABILITY



Rustic Red (S)



Red Smooth (S)

Key (S) Smooth finish

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced clay tiles  
Element Ref: 812410006)
- ✓ BES 6001 Responsible Sourcing certified







## TECHNICAL DATA

Size of tile	375mm x 250mm	
Minimum pitch*	15° (100mm headlap)	22.5° (75mm headlap)
Maximum pitch	70°	
Minimum headlap	75mm	
Maximum gauge	300mm	
Tile thickness	15mm (nominal)	
Cover width	224mm (nominal)	
Covering capacity (net)	14.9 tiles/m <sup>2</sup> at 75mm headlap	16.2 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	46.2kg/m <sup>2</sup> (0.453 kN/m <sup>2</sup> ) at 75mm headlap	50.2kg/m <sup>2</sup> (0.462 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	3.4 lin.m/m <sup>2</sup> at 75mm headlap	3.7 lin.m/m <sup>2</sup> at 100mm headlap (roof)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres	
Tile nails	38mm x 3.35mm nail	
Authority	BS EN 1304	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## LINCOLN FITTINGS

Available in colours to match main tiles.

Description				
	450mm clay half round ridge	450mm half round block end ridge**	450mm third round hip	305mm third round hip stop end**
Description				
	Contour vent tile	Dentil slip		

\*\* Made to order, subject to lead time.



Environmental  
Product Declaration  
available



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help







# Concrete tiles and fittings

# PLAIN

The authentic single camber design of the Marley concrete plain tile gives it an attractive look to match its outstanding versatility.



## COLOUR AVAILABILITY



Key (F) Fine sanded finish (G) Granular finish (S) Smooth finish

## TECHNICAL DATA

Size of tile	267mm x 168mm	
Minimum pitch*	35°	
Maximum pitch	90°	
Minimum headlap	65mm (roof)	37.5mm (vertical)
Maximum gauge	100mm (roof)	115mm (vertical)
Tile thickness	12mm (nominal)	
Cover width	168mm (nominal)	
Covering capacity (net)	60 tiles/m² at 100mm gauge (roof)	53 tiles/m² at 115mm gauge (vertical)
Weight of tiling (approx.)	73.8kg/m² (0.72 kN/m²) at 100mm gauge (roof)	58kg/m² (0.57 kN/m²) at 115mm gauge (vertical)
Battens required (net)	10.0 lin.m/m² at 100mm gauge (roof)	8.7 lin.m/m² at 115mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 2.65mm nail	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete plain tiles  
Element Refs: 812410017, 812410050, 812410064)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## PLAIN TILE FITTINGS

Available in all colours to match main tiles.



Plain tile-and-a-half




Plain eaves/top tile

# ASHMORE


A single lap, interlocking double plain tile, with the engineered precision and ease of installation of an interlocking tile.




## COLOUR AVAILABILITY



Smooth Brown (S)



Smooth Grey (S)



Old English Dark Red (S)

Key  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	267mm x 333mm
Minimum pitch*	25° (77mm headlap) 22.5° (92mm headlap)
Maximum pitch	90°
Minimum headlap	77mm
Maximum gauge	190mm
Tile thickness	16mm (nominal)
Cover width	302mm (nominal)
Hanging length	235mm (nominal)
Covering capacity (net)	17.5 tiles/m <sup>2</sup> at 77mm headlap 19 tiles/m <sup>2</sup> at 92mm headlap
Weight of tiling (approx.)	48kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 77mm headlap 52kg/m <sup>2</sup> (0.51 kN/m <sup>2</sup> ) at 92mm headlap
Battens required (net)	5.3 lin.m/m <sup>2</sup> at 77mm headlap 5.8 lin.m/m <sup>2</sup> at 92mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm nail
Fixing clips	Eaves, verge and tile clips
Authority	BS EN 490

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## ASHMORE FITTINGS


Available in all colours to match main tiles.




Ashmore three quarter tile (LH)



Ashmore three quarter tile (RH)



Ashmore tile-and-a-half



Ashmore dry verge

Ashmore tiles should be laid broken bond. The required broken bond pattern is created by the introduction of three-quarter width tiles in alternate courses. Tile-and-a-half tiles are available for use at hips and valleys.

Note: All measurements in mm.



# EDGEMERE

A clean and precise slate-like appearance is enhanced by the thin leading edge and the broken bond laying technique.




## COLOUR AVAILABILITY



Smooth Brown (S)



Smooth Grey (S)



Old English Dark Red (S)



Anthracite (S)

Key (S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 tiles/m <sup>2</sup> at 75mm headlap 10.5 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap 47.5kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap 3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm nail
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## EDGEMERE FITTINGS

Available in all colours to match main tiles.



Edgemere half slate



Edgemere dry verge


Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Purpose made half slates are available and can be formed on site by cutting along the scoreline.

# DUO EDGEMERE


A thin leading edge interlocking slate designed to look like and blend in with small format slates.



## COLOUR AVAILABILITY




Smooth Grey (S)



Old English Dark Red (S)



Anthracite (S)



Smooth Brown (S)

Key (S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 tiles/m <sup>2</sup> at 75mm headlap 10.5 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap 47.5kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap 3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm nail
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## LAYING DUO EDGEMERE



Duo Edgemere should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width slates, cut from standard slates on site, in alternate courses to form verges and abutments.



# RIVEN EDMERE

A thin leading edge interlocking slate with the addition of a riven surface, providing a more natural appearance with variegated look, depth and tone.

## COLOUR AVAILABILITY



Key  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)
Maximum pitch	90°
Minimum headlap	75mm (22.5° and above) 100mm (below 22.5°)
Maximum gauge	345mm
Tile thickness	18mm (nominal)
Cover width	298mm (nominal)
Hanging length	395mm (nominal)
Covering capacity (net)	9.7 tiles/m <sup>2</sup> at 75mm headlap 10.5 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap 47.5kg/m <sup>2</sup> (0.47 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap 3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Tile nails	45mm x 3.35mm nail
Fixing clips	Eaves, verge and slate clips
Authority	BS EN 490

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

## RIVEN EDMERE FITTINGS

Available in all colours to match main tiles.



Riven Edgemere half slate




Edgemere dry verge


Edgemere should be laid broken bond. The required broken bond pattern is created by the introduction of half slates, to form verges in alternate courses. Purpose made half slates are available and can be formed on site by cutting along the scoreline.

# MODERN

A flat, smooth, single lap interlocking design, whose appearance is enhanced by the required broken bond laying pattern.



## COLOUR AVAILABILITY

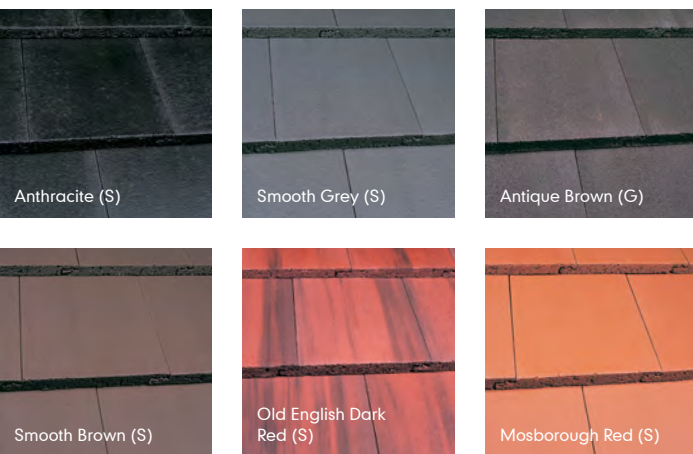

Key  
(G) Granular finish  
(S) Smooth finish


## TECHNICAL DATA

Size of tile	420mm x 330mm	
Minimum pitch*	22.5° Smooth (75mm headlap) 17.5° Smooth (100mm headlap)	30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Tile thickness	30mm (nominal)	
Cover width	292mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.9 tiles/m <sup>2</sup> at 75mm headlap	10.7 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	50kg/m <sup>2</sup> (0.49 kN/m <sup>2</sup> ) at 75mm headlap	54kg/m <sup>2</sup> (0.53 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap	3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	50mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



## MODERN HALF TILE

Available in all colours to match main tiles.


Modern should be laid broken bond. The required broken bond pattern is created by the introduction of half tiles, to form verges and abutments in alternate courses. Purpose made half tiles are available and can be formed on site by cutting along the scoreline.





Note: All measurements in mm.

# DUO MODERN

A flat, smooth, single lap, interlocking tile with a ‘mock bond’ joint is enhanced by the required broken bond laying technique.



## COLOUR AVAILABILITY



Key  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm	
Minimum pitch*	22.5° (75mm headlap) 17.5° (100mm headlap)	
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Tile thickness	30mm (nominal)	
Cover width	292mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.9 tiles/m <sup>2</sup> at 75mm headlap	10.7 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	50kg/m <sup>2</sup> (0.49 kN/m <sup>2</sup> ) at 75mm headlap	54kg/m <sup>2</sup> (0.53 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap	3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	50mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

## LAYING DUO MODERN

Duo Modern should be laid quarter bond. The required quarter bond pattern is created by the introduction of three-quarter width tiles, cut from standard tiles on site, in alternate courses to form verges and abutments.



# MENDIP

A double pantile design with elegant flowing lines, providing instant visual appeal.



## COLOUR AVAILABILITY



Anthracite (S)



Smooth Grey (S)



Antique Brown (G)



Smooth Brown (S)



Dark Red (G)



Old English Dark Red (S)



Mosborough Red (S)

**Key**  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm	
Minimum pitch*	17.5° Smooth (75mm headlap) 15° Smooth (100mm headlap)	30° Granular (75mm headlap) 25° Granular (100mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	27mm (nominal)	
Overall depth	59mm	
Cover width	298mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.7 tiles/m <sup>2</sup> at 75mm headlap	10.5 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	46kg/m <sup>2</sup> (0.45 kN/m <sup>2</sup> ) at 75mm headlap	49kg/m <sup>2</sup> (0.48 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap	3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	70mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified


## LONG RAFTER LENGTHS

Mendip interlocking tiles are suitable for rafter lengths up to 10m as follows:

- 15° - 17.5° pitch will require a minimum headlap of 100mm
- Above 17.5° pitch will require a minimum headlap of 75mm

## MENDIP HALF TILE FOR CLOAK VERGE

Available in all colours to match main tiles.



Environmental  
Product Declaration

FOR MORE [marley.co.uk](https://www.marley.co.uk)

# MENDIP 12.5

A double pantile designed with a variable gauge and subtle design modifications to achieve an even lower pitch.



## COLOUR AVAILABILITY



Smooth Grey (S)



Smooth Brown (S)



Old English Dark Red (S)

Key  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm
Minimum pitch*	12.5° Smooth (100mm headlap, up to 6m rafters)
Maximum pitch**	44°
Minimum headlap	100mm
Maximum gauge	320mm
Body thickness	27mm (nominal)
Overall depth	59mm
Cover width	298mm (nominal)
Hanging length	397mm (nominal)
Covering capacity (net)	10.5 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	49kg/m <sup>2</sup> (0.48 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixing clips	Eaves, verge and tile clips, Mendip headclip, SoloFix
Authority	BS EN 490

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

\*\* For rafter pitches over 15°, see Mendip (page 38).

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

# LUDLOW MAJOR

Simple, strong lines exploit the interplay between light and shade.



## COLOUR AVAILABILITY



Smooth Grey (S)



Antique Brown (G)



Smooth Brown (S)



Dark Red (G)



Old English Dark Red (S)



Mosborough Red (S)

Key  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	25mm (nominal)	
Overall depth	45mm	
Cover width	295mm (nominal)	
Hanging length	399mm (nominal)	
Covering capacity (net)	9.8 tiles/m <sup>2</sup> at 75mm headlap	10.6 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	45kg/m <sup>2</sup> (0.44 kN/m <sup>2</sup> ) at 75mm headlap	49kg/m <sup>2</sup> (0.48 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin./m <sup>2</sup> at 75mm headlap	3.1 lin./m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	55mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY


- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified




Environmental  
Product Declaration  
available

# LUDLOW PLUS



Ideal for refurbishment applications, where its smaller format reduces wastage.



## COLOUR AVAILABILITY



**Key**  
(G) Granular finish  
(S) Smooth finish



## TECHNICAL DATA

Size of tile	387mm x 229mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	312mm	
Body thickness	25mm (nominal)	
Overall depth	45mm	
Cover width	204mm (nominal)	
Hanging length	361mm (nominal)	
Covering capacity (net)	15.7 tiles/m <sup>2</sup> at 75mm headlap	17.1 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	47kg/m <sup>2</sup> (0.46 kN/m <sup>2</sup> ) at 75mm headlap	51kg/m <sup>2</sup> (0.50 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	3.2 lin.m/m <sup>2</sup> at 75mm headlap	3.5 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	50mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)

✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

# DOUBLE ROMAN

A 2000 year old profile with precision-engineered functionality.



## COLOUR AVAILABILITY



Smooth Grey (S)



Antique Brown (G)



Smooth Brown (S)



Dark Red (G)



Old English Dark Red (S)



Mosborough Red (S)

Key  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm	
Minimum pitch*	25° Smooth (75mm headlap) 22.5° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	28mm (nominal)	
Overall depth	53mm	
Cover width	300mm (nominal)	
Hanging length	397mm (nominal)	
Covering capacity (net)	9.7 tiles/m <sup>2</sup> at 75mm headlap	10.4 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	44kg/m <sup>2</sup> (0.43 kN/m <sup>2</sup> ) at 75mm headlap	47kg/m <sup>2</sup> (0.46 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap	3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	65mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)




Environmental  
Product Declaration  
available

- ✓ BES 6001 Responsible Sourcing certified

### DOUBLE ROMAN HALF TILE FOR CLOAK VERGE

Available in all colours to match main tiles.







# WESSEX

Designed to shed water efficiently at pitches down to 15°, the Wessex has clean, simple lines with a pleasing minimalist style.

lowpitch



## COLOUR AVAILABILITY



Key  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	420mm x 330mm	
Minimum pitch*	15°	
Maximum pitch	44°	
Minimum headlap	75mm	
Maximum gauge	345mm	
Body thickness	29mm (nominal)	
Overall depth	56mm	
Cover width	298mm (nominal)	
Hanging length	403mm (nominal)	
Covering capacity (net)	9.7 tiles/m <sup>2</sup> at 75mm headlap	10.5 tiles/m <sup>2</sup> at 100mm headlap
Weight of tiling (approx.)	50kg/m <sup>2</sup> (0.49 kN/m <sup>2</sup> ) at 75mm headlap	53kg/m <sup>2</sup> (0.52 kN/m <sup>2</sup> ) at 100mm headlap
Battens required (net)	2.9 lin.m/m <sup>2</sup> at 75mm headlap	3.1 lin.m/m <sup>2</sup> at 100mm headlap
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A+ rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

# ANGLIA

A single lap interlocking concrete tile with the classic clay pantile profile and a bullnosed leading edge design.




## COLOUR AVAILABILITY



Antique Brown (G)



Smooth Grey (S)



Old English Dark Red (S)

**Key**  
(G) Granular finish  
(S) Smooth finish

## TECHNICAL DATA

Size of tile	387mm x 230mm	
Minimum pitch*	30° Smooth (75mm headlap) 25° Smooth (100mm headlap)	30° Granular (75mm headlap)
Maximum pitch	90°	
Minimum headlap	75mm	
Maximum gauge	312mm	
Body thickness	30mm (nominal)	
Overall depth	71mm	
Cover width	204mm (nominal)	
Hanging length	370mm (nominal)	
Covering capacity (net)	15.7 tiles/m <sup>2</sup> at 75mm headlap 17.1 tiles/m <sup>2</sup> at 100mm headlap	
Weight of tiling (approx.)	47kg/m <sup>2</sup> (0.46 kN/m <sup>2</sup> ) at 75mm headlap 51kg/m <sup>2</sup> (0.50 kN/m <sup>2</sup> ) at 100mm headlap	
Battens required (net)	3.2 lin.m/m <sup>2</sup> at 75mm headlap 3.5 lin.m/m <sup>2</sup> at 100mm headlap	
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Tile nails	38mm x 3.35mm nail	
Fixing clips	Eaves, verge and tile clips	
Authority	BS EN 490	

\* The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

## SUSTAINABILITY

- ✓ A<sup>+</sup> rated in the BRE Green Guide (based on generic rating for UK produced concrete interlocking tiles  
Element Refs: 812410007, 812410018, 812410049)
- ✓ BES 6001 Responsible Sourcing certified



Environmental  
Product Declaration  
available

# CONCRETE FITTINGS

## PLAIN TILE FITTINGS

Available in all colours to match main tiles.

Description	Plain tile-and-a-half	Plain eaves/top tile	Cloak verge tile (Left & right hand)	Internal angle (Left & right hand)
Description	External angle (Left & right hand)	Valley tile	Arris hip	Bonnet hip
Angles available	90°, 120°, 135°	35-50°	35-40°	35-50°

## INTERLOCKING TILE CLOAK VERGES

Available in all colours to match main tiles.

Description	Mendip cloak verge	Double Roman cloak verge	Modern cloak verge	Mendip half tile	Double Roman half tile	Modern half tile

## VERGES, RIDGES AND HIPS (continued on page 46)

Available in a range of colours to match main tiles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

Description	Segmental ridge†‡	Segmental security ridge	Segmental block end ridge†‡	Segmental mono-ridge†‡	Segmental mono block end ridge†‡
Colours available	All colours	All colours	All colours	All colours	All colours
Pitch range#	15-60° dry ridge*	15-50° bedded	15-60° dry ridge*	15-55° dry ridge	15-55° dry ridge

† Compatible with Marley ventilated dry ridge system

‡ Compatible with Marley Universal RidgeFast

\* 60° Plain, Mendip, Wessex and Anglia only

Note: All measurements in mm.

# Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

# CONCRETE FITTINGS

## VERGES, RIDGES AND HIPS (continued)

Available in a range of colours to match main tiles. Recommended roof pitch may vary depending on product and system used, please contact the Technical Advisory Service.

Description	Modern ridge†‡§	Modern security ridge	Modern block end ridge†	Modern mono-ridge	Modern mono block end ridge‡§
Colours available	All colours	All colours	All colours	All colours	All colours
Pitch range#	15-55° dry ridge	15-45° bedded	15-55° dry ridge	15-45° bedded	15-45°

Description	Modern stop end hip tile	Third round hip tile	Third round stop end	Half round baby ridge	Pascoll roll baby ridge
Colours available	All colours	All colours	All colours	All colours	All colours
Pitch range#	15-55°†‡§	17.5-45°†‡§	15-55°†‡§	15-55°	15-45°

Description	90° Angle ridge/hip‡ 90° security angle ridge/hip‡	125° Angle ridge/hip Security 125° Angle ridge/hip	145° Angle hip Security 145° Angle ridge/hip	Gas vent ridge terminal§	Ridge vent terminal§
Colours available	see below*	see below*	see below*	see below**	see below**
Pitch range#	45-50° bedded	12-25°	15-25°	15-55° dry ridge	15-55° dry ridge

Description	Segmental ridge junction apex cap^	Modern ridge junction apex cap^	Third round apex cap^	Modern hip apex cap^
Colours available	Grey, Brown, Terracotta	Grey, Brown, Terracotta	Grey, Brown, Terracotta	Grey, Brown, Terracotta

† Compatible with Marley ventilated dry ridge system

‡ Compatible with Marley dry hip system

§ Compatible with Marley Universal RidgeFast

‡ Compatible with Marley Universal HipFast

# Guidance only. Range is variable depending on the combined ridge system, roof tile and pitch. For further information, please contact our Technical Advisory Service on 01283 722330

\* Available in Smooth Grey, Mosborough Red, Smooth Brown and Old English Dark Red

\*\* Available in Smooth Grey, Mosborough Red, Smooth Brown and Anthracite

^ Can only be used with our Ventilated Dry Ridge and Hip Batten Section System

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



## Dry fix & ventilation systems



# EAVES SYSTEMS

## 10MM EAVES VENT



Designed to provide continuous 10mm free vent areas to roof voids in an efficient and unobtrusive manner for roofs with a lower pitch and deeper insulation.

### Advantages

- Simple, fast installation
- Wide rafter roll for lower pitched roofs with deeper insulation
- Dry fix system
- Allows clip fixing of tiles at eaves
- Compresses insulation ensuring airflow
- Prevents ponding of water
- Prevents ingress of birds, vermin and insects
- Meets BS 5534 requirements and NHBC guidelines

### Function and compatibility

- 10mm continuous ventilation at eaves
- 10,000mm<sup>2</sup> free area of ventilation per linear metre
- 12.5°-60° pitched roofs
- Eaves-to-ridge or eaves-to-eaves ventilation
- Suitable for all Marley tiles and slates
- Suitable for other manufacturers' tiles and slates†

**Universal 10mm eaves vent system (6m pack)** 46350

- 6m eaves rafter roll
- 6 No. 2-in-1 vented eaves

**Comb filler strip** 30425

**Continuous rafter roll (2 x 6m)** 46323

† Check with the manufacturer to confirm compatibility with Marley systems.

## 25MM EAVES VENT



The system is both efficient and unobtrusive, and it is suitable for roof pitches from 12.5° to 55°. It can also be used for ventilating the batten cavity where needed.

### Advantages

- Simple, fast installation
- Dry fix system
- Allows clip fixing of tiles at eaves
- Compresses insulation ensuring airflow
- Prevents ponding of water
- Prevents ingress of birds, vermin and insects
- Meets BS 5534 requirements and NHBC guidelines

### Function and compatibility

- 25mm continuous ventilation at eaves
- 25,000mm<sup>2</sup> free area of ventilation per linear metre
- 12.5°-60° pitched roofs
- Eaves-to-ridge or eaves-to-eaves ventilation
- Suitable for all Marley tiles and slates
- Suitable for other manufacturers' tiles and slates†

**Universal 25mm eaves vent system (6m pack)** 46351

- 6m eaves rafter roll
- 10 No. felt support tray
- 6 No. strip ventilator

**Comb filler strip** 30425

**Continuous rafter roll (2 x 6m)** 46323

† Check with the manufacturer to confirm compatibility with Marley systems.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

# VERGE SYSTEMS

## UNIVERSAL DRY VERGE SYSTEM



The Marley Universal Dry Verge system has been designed to make verge detailing secure and elegantly simple, complying with BS 8612 and BS 5534.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Drainage channels reduce the risk of gable end staining
- Starter fixing bracket enables fast and secure installation
- Suitable for other manufacturers' tiles and slates†
- Manufactured from high grade polypropylene for outstanding durability
- Simple and fast to install
- Also suitable for verges without bargeboard
- Dry verge refurbishment kit allows retro-fit

### Dry verge system

28 No. left hand units	
Brown	39113
Grey	39111
Terracotta	39114

28 No. right hand units	
Brown	39213
Grey	39211
Terracotta	39214

Starter pack (also available)	53931
-------------------------------	-------

### End caps


Modern ridge		394*
Segmental ridge		395*
Modern mono-ridge	Left hand	408*
	Right hand	409*
Segmental mono-ridge	Left hand	427*
	Right hand	428*

Dry verge refurbishment kit	53580
-----------------------------	-------

† Check with the manufacturer to confirm compatibility with Marley systems.

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta.

## EDGEMERE DRY VERGE SYSTEM

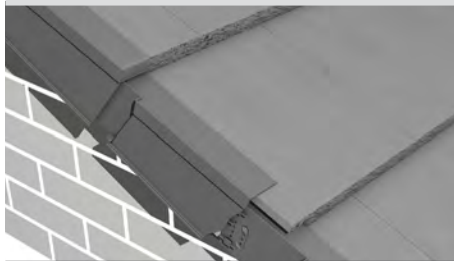

Compatible with Edgemere, this dry verge provides a strong, mechanically fixed, weathertight verge that meets the requirements of BS 5534. The system is fast, simple to install and offers a sleek, maintenance-free verge solution.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Drainage channels reduce the risk of gable end staining
- Starter fixing bracket enables fast and secure installation
- Manufactured from high grade polypropylene for outstanding durability
- Simple and fast to install
- Also suitable for verges without bargeboard
- Dry verge refurbishment kit allows retro-fit

### Verge units

	Left hand	381*
	Right hand	382*
Edgemere dry verge fixing kit		53830

### End caps

Edgemere ridge		384**
Modern mono-ridge	Left hand	408**
	Right hand	409**
Segmental mono-ridge	Left hand	427**
	Right hand	428**

Dry verge refurbishment kit	53580
-----------------------------	-------

Batten end clips	30214
------------------	-------

\* Suffix with colour code 01 Grey, 03 Brown.

\*\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

# VERGE SYSTEMS



Compatible with Ashmore, this dry verge provides a strong, mechanically fixed, weathertight verge that meets the requirements of BS 5534. The system is fast, simple to install and offers a sleek, maintenance-free verge solution.

**Advantages**

- Meets BS 5534 requirements and NHBC guidelines
- Multiple drainage channels to reduce the risk of gable end staining
- Starter fixing bracket enables fast and secure installation
- Sleek design complements plain tile aesthetic
- Manufactured from high grade polypropylene for outstanding durability
- Simple and fast to install
- Also suitable for verges without bargeboard

**Verge units**

Ashmore dry verge starter unit		MA39901
Grey	Left hand	MA39611
	Right hand	MA39711
Brown	Left hand	MA39613
	Right hand	MA39713
Terracotta	Left hand	MA39614
	Right hand	MA39714

**Segmental ridge end caps**

Grey	MA39801
Brown	MA39803
Terracotta	MA39804



Continuous dry verge provides a strong, weathertight and maintenance-free verge that meets the requirements of BS 5534. The system is fast and simple to install and offers sleek, uninterrupted verges without the need for mortar.

**Advantages**

- Meets BS 5534 requirements and NHBC guidelines
- Meets BS 8612 requirements
- Strong and durable
- Weathertight and maintenance free
- Creates continuous clean verge detail

<b>Continuous dry verge</b>	
Verge section (3 metre)	38501
Fixing kit	38510

Available in Black.

# VERGE SYSTEMS

# VALLEY SYSTEM

## CLOAK VERGE SYSTEM




Provides a mechanically fixed, durable, maintenance free verge solution for Mendip (illustrated above), Modern, Double Roman interlocking tiles and double lap plain tiles.

<b>Mendip cloak verge</b>		
	Left hand	245
	Right hand	246
Mendip half tile		147
Mendip fixing kit		54252
<b>Double Roman cloak verge</b>		
	Left hand	265
	Right hand	266
Double Roman half tile		102
Double Roman fixing kit		54252
<b>Concrete plain tile cloak verge</b>		
	Left hand	249
	Right hand	250
<b>Segmental block end ridge</b>		
		191
<b>Segmental mono block end ridge</b>		
	Left hand	189
	Right hand	190
<b>Modern cloak verge</b>		
	Left hand	371
	Right hand	370
Modern cloak verge half tile		372
Modern fixing kit		53730
<b>Modern block end ridge</b>		
		374
<b>Modern mono block end ridge</b>		
	Left hand	375
	Right hand	376
<b>Clay plain tile cloak verge</b>		
	Left hand	MAKE**ZLVTB
	Right hand	MAKE**ZRVTB

\*\* Suffix with colour code: 001 Red Smooth, 003 Red Sandfaced, 004 Heather Sandfaced, 006 Farmhouse Brown, 007 Grey Sandfaced, 009 Brindle, 033 Heather Blend, 034 Burnished, 151 Ashurst, 150 Aylesham Mix, 142 Loxleigh, 305 Autumn Brindle, 402 Dark Heather, 403 Staffs Mix, 406 Staffs Blue, 408 Blue Smooth

## GRP DRY VALLEY

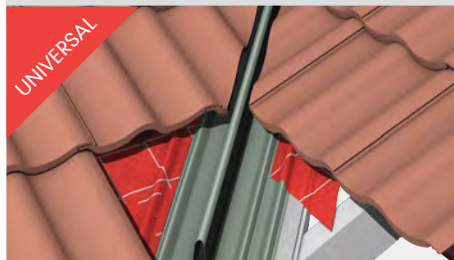

Mortar-free solution suitable for use with concrete interlocking tiles and concrete/clay plain tiles. Suitable on rafter pitches from 15-60° and accommodates up to 20° pitch difference either side of valley.

### Advantages


- Dry fix, mortar-free system
- Durable GRP technology
- Simple and fast installation
- Can accommodate up to 20° pitch variance either side of valley
- Performs on pitches up to 60°
- Gives the appearance of a close-cut roof

### Universal GRP dry valley

(3m lengths)	
Low profile	30422
High profile	30421

# HIP SYSTEMS

## HIPFAST SYSTEM

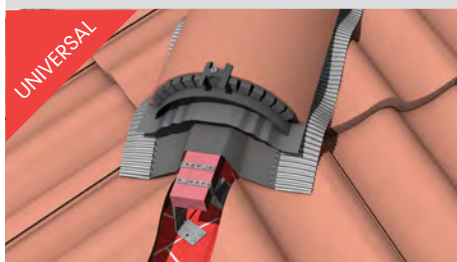

Simple and rapidly installed ventilated dry hip system, compatible with all tiles and slates up to 45° (suitable up to 60° subject to tile/slate profile and hip tile type).

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Meets BS 8612 requirements
- Highest grade aluminium flashing
- Hydrophobic membrane for maximum weather resistance
- Elastomeric membrane for easy installation and prevents rucking
- Bespoke batten brackets for anchoring to structure
- Can be used with all concrete tiles and slates
- Completely dry fixed system
- Suitable with standard hip tiles

### Universal HipFast system (6m pack) 53400

- 6m length hip roll
- 6 No. batten brackets
- 13 No. hip unions
- 2 No. tapered filler units

### Hip support trays 34002

- 9 No. 715mm

### RidgeFast/HipFast Union Packs 53303

Tile head clip pack (20 No.) 43604

Tile tail clip pack (20 No.) 43602

Secret cut tile clip pack (50 No.) 43607

100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles) 70000

## DRY HIP SYSTEM



Suitable for all concrete tiles when used in conjunction with Third round or Modern hip tiles for roof pitches 15-45°.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Simple fast installation
- Weathertight and maintenance free
- Can be used up to 45° pitch
- Can be used with all Marley concrete interlocking tiles
- Fully compatible with ventilated dry ridge system

### Batten section 43300

#### Fixing kits

Low profile 54360

High profile 54361

Hip tail clip pack 43602

#### Ridge unions

Modern ridge union 4140\*

Third round hip union 4350\*

#### Apex caps

Modern hip apex cap (15-24°) 4381\*

(25-35°) 4382\*

(36-45°) 4383\*

Third round hip apex cap (15-24°) 4371\*

(25-35°) 4372\*

(36-45°) 4373\*

#### Block end hip tiles

Third round block end hip tile 291


Modern block end hip tile 292

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta



# RIDGE SYSTEMS

## RIDGEFAST SYSTEM

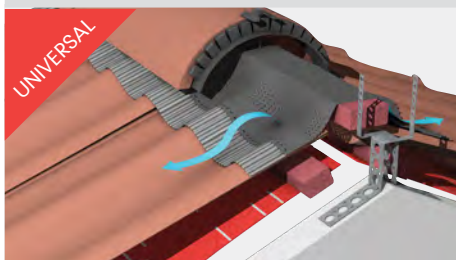

Simple and rapidly installed ventilated dry ridge system providing 5mm continuous ventilation. Compatible with all tiles and slates from 15-60° dependent on circumstances.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Meets BS 8612 requirements
- Highest grade aluminium flashing
- Hydrophobic membrane for maximum weather resistance
- Elastomeric membrane for easy installation and prevents rucking
- Bespoke batten brackets for anchoring to structure
- Suitable for other manufacturers' tiles and slates†
- Completely dry fixed system
- Suitable with standard ridge tiles
- Provides 5mm continuous ventilation along the ridge

<b>Universal RidgeFast system (6m pack)</b>	53300
- 6m length ridge roll	
- 10 No. ridge batten brackets	
- 13 No. ridge union straps	
- 13 No. ridge union clamps	


<b>RidgeFast/HipFast Union Packs (pack quantity 6)</b>	53303
--	-------

<b>RidgeFast blanking tape (optional)</b>	33001
---	-------

<b>100mm x 4.8mm deep ridge screw pack (for clay third round hips with profiled tiles)</b>	70000
--	-------

† Check with the manufacturer to confirm compatibility with Marley systems.

## VENTILATED DRY RIDGE SYSTEM

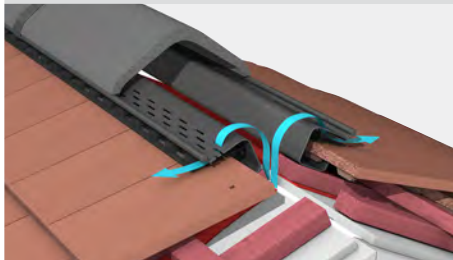

Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles when used on roof pitches up to 55°\*\*.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Simple and fast to install
- Weathertight and maintenance free
- Can be used up to 55° pitch\*\*
- Provides 5mm continuous ventilation along the ridge
- Can be used with all fibre cement slates, concrete tiles and slates
- Fully compatible with dry hip system

### Batten sections

Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202

### Ridge unions

Segmental ridge union	413*
Modern ridge union	414*
Modern/segmental adaptor ridge union	420*

Concrete tiles & slates fixing kit	41000
------------------------------------	-------

### Filler units†

Double Roman - vented	42105
Modern, Duo Modern, Edgemere - vented	41501
Ludlow Major - vented	41601
Ludlow Plus - vented	41508
Mendip - vented	41701
Wessex - vented	41901
Anglia - vented	41506
Fibre Cement Slates	41705

### Apex caps

Segmental ridge junction	439*
Modern ridge junction	440*

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

\*\* For roof pitches over 55°, speak to the Technical Advisory Service

† Non vented ridge can be achieved by not slitting the underlay.

Blanking tape can be used with Gas vent Ridge or Ridge Vent Terminals to prevent fumes reentering the building.

# RIDGE SYSTEMS

## VENTILATED DRY MONO RIDGE SYSTEM



Mechanically fixed, weathertight and mortar free solution providing 5mm continuous ridge ventilation. Suitable for concrete tiles when used on roof pitches up to 55°\*\*.

### Advantages

- Meets BS 5534 requirements and NHBC guidelines
- Simple and fast to install
- Weathertight and maintenance free
- Can be used up to 55° pitch\*\*
- Provides 5mm continuous ventilation along the ridge
- Can be used with all fibre cement slates, concrete tiles and slates
- Fully compatible with dry hip system

### Batten sections

Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202

### Ridge unions

Segmental mono ridge union	423*
----------------------------	------

Concrete tiles & slates fixing kit	41000
------------------------------------	-------

### Filler units†

Double Roman - vented	42105
Modern, Duo Modern, Edgemere - vented	41501
Ludlow Major - vented	41601
Ludlow Plus - vented	41508
Mendip - vented	41701
Wessex - vented	41901
Anglia - vented	41506
Fibre Cement Slates	41705

\* Suffix with colour code 01 Grey, 03 Brown, 04 Terracotta

† Non vented ridge can be achieved by not slitting the underlay. Blanking tape can be used with Gas vent Ridge or Ridge Vent Terminals to prevent fumes reentering the building.

\*\* For roof pitches over 55°, speak to the Technical Advisory Service.

## RIDGE VENT TERMINALS



Suitable for natural soil, or mechanical ventilation. Provides high level ventilation for concrete tiles (9,500mm² free area), clay plain tiles (10,000mm² free area).

### Ridge vent terminal

Illustrated above – for natural ventilation of the roof void apex and connection to mechanical ventilation systems.  
For concrete tiles 198

### Gas vent ridge terminal for condensing boilers

Segmental	254
Modern	255

### Gas vent ridge terminal (concrete tiles)


For connection to gas appliances of rated input of 60 Kw max. only (not suitable for gas condensing boilers or oil fired boilers).

With extension piece	256
Gasket set (spare)	30346
Plumbers accessory pack	39090

For full product codes, please speak to Customer Services on 01283 722849.

# ABUTMENT SYSTEMS

TOP ABUTMENT VENTILATION SYSTEM

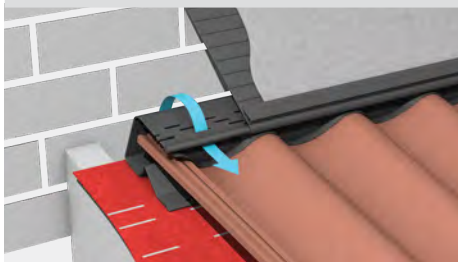

Designed to provide a totally dry fixed and weathertight top abutment that is fast and simple to install and at the same time provides ventilation at apex of the abutment.

## Batten sections

Low profile	41101
High profile	41201
Steep pitch (low profile)	41102
Steep pitch (high profile)	41202
Lead support strip	42505

Fixing Kits	41000
-------------	-------

## Filler units†

Double Roman – vented	42105
Modern, Duo Modern, Edgemere – vented	41501
Ludlow Major – vented	41601
Ludlow Plus – vented	41508
Mendip – vented	41701
Wessex – vented	41901
Anglia – vented	41506
Fibre cement slates – vented	41705

DRY FIX SOAKERS



An easy-to-install, lightweight and highly affordable way to reduce both the material and labour costs associated with lead at side abutments.

## Modern dry soakers

Left hand	MA30476
Right hand	MA30477

## Edgemere dry soakers

Left hand	MA30474
Right hand	MA30475

## Ashmore dry soakers

Left hand	MA30472
Right hand	MA30473

## Clay/concrete plain tile dry soakers

Left hand	MA30478
Right hand	MA30479

## Fibre cement slate dry soakers

Left hand and right hand	MA30480
--------------------------	---------

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation


Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

# ABUTMENT SYSTEMS


FLEXFAST LEAD REPLACEMENT ROLL

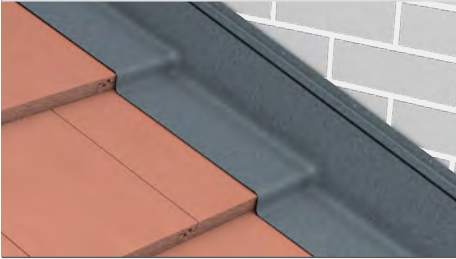

Flexfast is an easy-to-use, lightweight flashing for abutments at walls, side and top, abutments at rising parts of structures such as dormers and chimneys.

5m x 450mm x 1.7mm	MA42611
5m x 300mm x 1.7mm	MA42610
Trim 2.5m	MA42345

BONDING GUTTERS

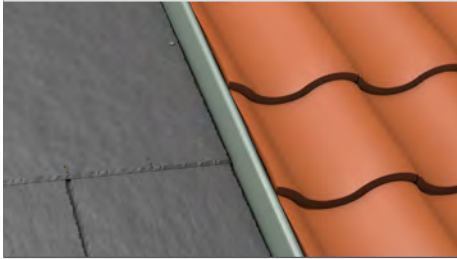

Easy-to-install, lightweight and highly affordable way to reduce the need for mortar and lead at the junction between two different roof coverings.

High profile	MA40471
Low profile	MA40470

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

# VENTILATION TERMINALS



The Universal tile vent terminals are designed for roof void ventilation and connection to 110mm soil pipe or mechanical extract systems. Free area: 15,000mm<sup>2</sup>.

Universal tile vent terminals for large format concrete interlocking tiles	
Grey	36700
Brown	36703
Terracotta	36704



The Universal Edgemere & Modern tile vents provide 10,000mm<sup>2</sup> free area of ventilation, and can be installed down to 20° minimum pitch at 100mm headlap. Designed to fit with similar tiles from other manufacturers.

Modern Universal contour vent terminal	461**
Edgemere Universal contour tile vent terminal	475**
Universal contour vent terminal adaptor	39100

\*\* Suffix with colour code 01 Grey, 03 Brown, 05 Red, 08 Anthracite



Designed for natural, mechanical or soil pipe ventilation. Provides 10,000mm<sup>2</sup> free area of ventilation. Suitable for concrete and clay plain tile roof pitches 30° and above‡.

Universal plain tile vent			
Grey			45501
Brown			45503
Red			45505
Flexible pipe ID 110mm (sold separately)			39091
Pressure resistance values			
Airflow (litres/second)	15	30	60
Pressure resistance (Pa)	13.6	53.7	21

‡ Please note minimum pitch of tile will apply.



# VENTILATION TERMINALS

## CLAY IN-LINE TILE VENT TERMINALS




Real clay tile slips provide visual integration on roof slope and 6,100mm<sup>2</sup> free area of ventilation.

Clay in-line tile ventilator	MAKE**ZICVB
Clay in-line tile adaptor	MAGL902ZVPAB
Flexible pipe	39091

\*\* Suffix with colour code: 001 Red Smooth, 003 Red Sandfaced, 004 Heather Sandfaced, 006 Farmhouse Brown, 007 Grey Sandfaced, 009 Brindle, 033 Heather Blend, 034 Burnished, 142 Loxleigh, 305 Autumn Brindle, 350 Aylesham Mix, 351 Ashurst, 352 Weathered, 402 Dark Heather, 403 Staffs Mix, 406 Staffs Blue, 408 Blue Smooth

## CONTOUR IN-LINE VENT TERMINALS

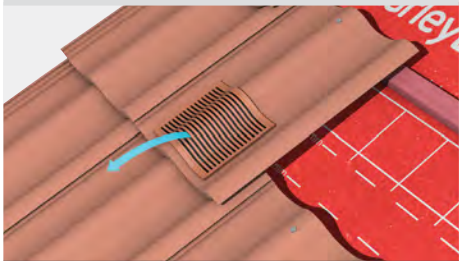

Discreet high performance vent terminals for high/low level roof space ventilation. Suitable for soil and mechanical ventilation. Minimum roof pitch 22.5°.

Contour tile vents	
Mendip	452**
Ashmore	450**
Wessex	459**
Ludlow Major	456**
Double Roman	453**
Ludlow Plus	457**
Anglia	460**
Flexible pipe	39091

\*\* Suffix with colour code 01 Grey, 03 Brown, 05 Red, 08 Anthracite

## TILE VENT TERMINALS




Available in a wide range of colours and finishes, provides for high/low level roof space ventilation. Suitable for natural soil, or mechanical ventilation (except Ashmore)†.

Terminals (with spigot)	
Mendip (illustrated above)	294*
Edgemere	259*
Modern	295*
Wessex	296*
Ludlow Major	297*
Double Roman	298*
Flexible pipe	39091
Ventilation roof tiles	
Ashmore	263

\* Available in all colours to match main tiles.

† Minimum pitch of tile will apply.

# SLATE ACCESSORIES



Simple and rapidly installed dry fix system providing 5mm continuous ridge ventilation. Compatible with fibre cement slates and ridges.

Ridge roll (6m) Code




33010



Easy-to-install continuous dry verge system, made from powder-coated aluminium, providing a neat weather-proof and durable finish for slates.

Verge trim (3m) (pack of 8) Code




42206




The Marley range of individual dry soakers are an easy to install, lightweight and highly affordable way to reduce both the material and labour costs associated with lead at side abutments.

Dry soaker (pack of 10) Code



30480 (for both left and right hand)

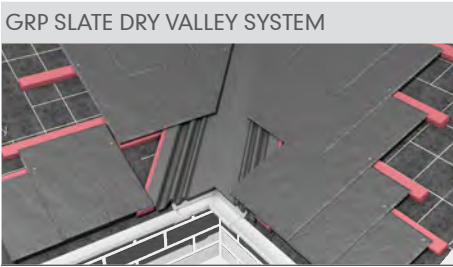

Developed to allow the designer freedom to specify a completely mortar-free roof, this system utilises the latest GRP technology. The advanced and unique parabolic gutter section improves discharge rates without added gutter depth.


Valley trough (3m) Code



30578

Fibre cement slate vented filler unit Code


41705

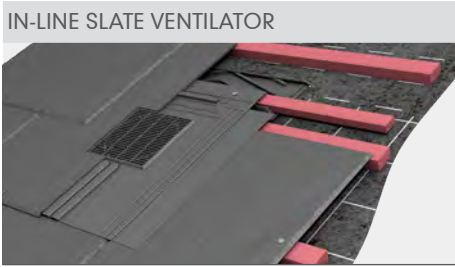

Ideal for roofs where the normal ventilation airpath is blocked by valleys, abutments, hips, dormer windows and firebreaks or party walls or where it is not possible to incorporate standard eaves or ridge ventilation.

In-line slate ventilator Code

EU\_UNIVSLATEVENT



In-line slate vent adaptor Code

EU INLINESLATEADAP 39091

# SYSTEM SELECTOR

	CLAY PLAIN TILES	LINCOLN	SHINGLES	CONCRETE PLAIN TILES	EDGEMERE RANGE	ASHMORE	LUDLOW PLUS
<b>UNIVERSAL ROOFING ACCESSORIES</b>							
10mm eaves vent system	•	•	•	•	•	•	•
25mm eaves vent system	•	•	•	•	•	•	•
Dry verge					•		•
HipFast	•	•		•	•	•	•
RidgeFast	•	•		•	•	•	•
Tile vent					•		•
GRP dry valley system (high)		•					•
GRP dry valley system (low)	•			•	•	•	
Underlays	•	•	•	•	•	•	•
Dry bonding gutters (high)		•					•
Dry bonding gutters (low)	•			•	•	•	
<b>DRY VERGE</b>							
Cloak verge system	•			•			
Edgemere dry verge					•		
Continuous dry verge	•			•	•	•	
Ashmore dry verge						•	
<b>DRY HIP</b>							
Dry hip system					•	•	•
<b>DRY VALLEY</b>							
Plain valley tiles	•			•			
<b>VENTILATED DRY RIDGE</b>							
Ventilated dry ridge					•	•	•
Ventilated mono dry ridge					•	•	•
Ridge roll vent			•				
<b>ABUTMENT SYSTEMS</b>							
Top abutment ventilation system					•	•	•
Dry soakers	•			•	•	•	•
Flexfast Lead replacement roll	•	•	•	•	•	•	•
<b>VENTILATION TERMINALS</b>							
Gas vent ridge terminals				•	•	•	•
Ridge vent terminals				•	•	•	•
In-line vents and contour vents	•	•		•	•	•	•
Tile vent terminals					•		
Ventilation roof tile						•	
Ridge vent for condensing boiler				•	•	•	•
<b>SOLARTILE®</b>							
Roof Defence	•	•	•	•	•	•	•

Subject to minimum rafter length and roof pitch requirements – contact the Technical Advisory Service for assistance.

# SYSTEM SELECTOR

	ANGLIA	DOUBLE ROMAN	LUDLOW MAJOR	MENDIP	MENDIP 12.5	WESSEX	MODERN & DUO MODERN
<b>UNIVERSAL ROOFING ACCESSORIES</b>							
10mm eaves vent system	•	•	•	•		•	•
25mm eaves vent system	•	•	•	•	•	•	•
Dry verge	•	•	•	•	•	•	•
HipFast	•	•	•	•	•	•	•
RidgeFast	•	•	•	•	•	•	•
Tile vent	•	•	•	•		•	•
GRP dry valley system (high)	•	•	•	•		•	
GRP dry valley system (low)							•
Underlays	•	•	•	•	•	•	•
Dry bonding gutters (high)	•	•	•	•		•	
Dry bonding gutters (low)							•
<b>DRY VERGE</b>							
Cloak verge system		•		•			•*
Edgemere dry verge							
Continuous dry verge							
Ashmore dry verge							
<b>DRY HIP</b>							
Dry hip system	•	•	•	•	•	•	•
<b>DRY VALLEY</b>							
Plain valley tiles							
<b>VENTILATED DRY RIDGE</b>							
Ventilated dry ridge	•	•	•	•	•	•	•
Ventilated mono dry ridge	•	•	•	•	•	•	•
Ridge roll vent							
<b>ABUTMENT SYSTEMS</b>							
Top abutment ventilation system	•	•	•	•	•	•	•
Dry soakers							•
Flexfast Lead replacement roll	•	•	•	•	•	•	•
<b>VENTILATION TERMINALS</b>							
Gas vent ridge terminals	•	•	•	•	•	•	•
Ridge vent terminals	•	•	•	•	•	•	•
In-line vents and contour vents	•	•	•	•		•	•
Tile vent terminals		•	•	•		•	•
Ventilation roof tile							
Ridge vent for condensing boiler	•	•	•	•		•	•
<b>SOLARTILE®</b>							
Roof Defence	•	•	•	•		•	•
	•	•	•	•	•	•	•

Subject to minimum rafter length and roof pitch requirements – contact the Technical Advisory Service for assistance.

\* Suitable for Modern only.

# FIXINGS

## BATTEN END CLIPS



These are for use with all dry verge units. Easily fitted to the batten end, they provide easy, fast and positive fixing of dry verge units to the batten end. Compliant with BS 8612.

Batten end clip

30214

## UNIVERSAL EAVES CLIP



Complies with BS 5534 and is suitable for most concrete or clay tiles. Strong and durable, the Universal eaves clip adjusts to roof pitch.

Universal eaves clip

30279

## SOLOFIX



SoloFix is a one-piece clip and nail for all standard interlocking tiles, providing an affordable fixing that not only installs up to 30% faster than traditional clips, but delivers outstanding strength and durability.

Manufactured from Zial®, an integrated clip and nail that is quick and simple to install.

Profile	Pack size (500) Code No.	Pack size (100) Code No.
Anglia	30434	30444
Double Roman	30433	30443
Duo Modern	30430	30440
Edgemere range	30431	30441
Lincoln	30436	30446
Ludlow Major	30430	30440
Ludlow Plus	30430	30440
Mendip/Mendip 12.5	30432	30442
Modern	30430	30440
Wessex	30432	30442

## ZIAL® (ZINC-ALUMINIUM) COATED CLIPS



Description	Code No.	Pack size
Wessex head clip	43610	50
Mendip head clip	43620	250



## ALUMINIUM VERGE AND EAVES CLIP PACKS

Profile	Right hand verge clip and nail pack – 50 clips and nails Code No.	Left hand verge clip and nail pack – 50 clips and nails Code No.	Eave clip and nail pack 100 clips and nails Code No.
Anglia	30284	30286	30274
Ashmore	30263	30263	30297
Double Roman	30289	30290	30275
Duo Modern	30290	30290	30273
Edgemere range	30263	30263	30297
Lincoln	30284	30286	30452*†
Ludlow Major	30287	30287	30277
Ludlow Plus	30290	30290	30277
Mendip/Mendip 12.5	30288	30287	30276
Modern	30290	30290	30273
Universal	–	–	30279*†
Wessex	30286	30286	30278

\* Clips only † Need to purchase nails (30455)

## ALUMINIUM NAIL PACKS

Profile	Code No.	Pack No.	Quantity
Anglia	30349	26	520
Ashmore	30398	31	432
Double Roman	30351	28	308
Duo Modern	30350	27	396
Edgemere range	30398	31	432
Lincoln	30349	26	520
Ludlow Major	30371	32	373
Ludlow Plus	30350	27	396
Mendip	30352	29	287
Modern	30350	27	396
Plain	30348	25	793

## STAINLESS STEEL FIXINGS

Description	Code No.	Pack size
Ashmore fixing clip	30130	100
Ashmore Solo clip	30141	250

# OTHER BS 5534 SOLUTIONS

BS 5534 is the British Standard for Slating and Tiling and provides the industry with guidance on best practice relating to the installation of roofs.



Mechanical fixing system for mortar bedded ridge tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Mortar bedded security ridge kit (illustrated above) 54365	
- 10 No. batten brackets	
- 13 No. clamps	
- 13 No. 75mm x 4.8mm s/s screws	
- 40 No. 25mm x 2.65mm s/s ARS nails	
100mm x 4.8mm deep ridge screw pack (for clay half round ridge with profiled tiles)	70000



Mechanical fixing system for mortar bedded hip tiles, helping house builders and contractors meet British Standards and NHBC guidelines.

Mortar bedded security hip kit (illustrated above) 54366	
- 6 No. batten brackets	
- 13 No. clamps	
- 13 No. 75mm x 4.8mm s/s screws	
- 40 No. 25mm x 2.65mm s/s ARS nails	
Tile tail clip pack (20 No.)	43602
Tile head clip pack (20 No.)	43604
100mm x 4.8mm deep ridge screw pack (for clay half round ridge with profiled tiles)	70000
Secret cut tile clip pack (50 No.)	43607



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help

## Shingles & Shakes

# SHINGLES

A truly renewable and sustainable roofing and cladding material.

lowpitch



## TECHNICAL DATA

Length	400mm	
Width	75-350mm (random)	
Pitch and gauge	14-21° at 95mm gauge (roof) 22-74° at 125mm gauge (roof)	75-90° at 175mm gauge (vertical)
Maximum pitch	90°	
Thickness	10mm at the butt, tapering	
Covering (bundle)	1.73m² at 95mm gauge (roof) 2.28m² at 125mm gauge (roof)	3.2m² at 175mm gauge (vertical)
Laid weight (approx.)*	8.1kg/m² at 95mm gauge (roof) 6.1kg/m² at 125mm gauge (roof)	4.0kg/m² at 175mm gauge (vertical)
Battens required (net)	10.5 lin.m/m² at 95mm gauge (roof) 8.0 lin.m/m² at 125mm gauge (roof)	5.7 lin.m/m² at 175mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)	
Fixings	Annular Ringshank Stainless steel or silicon bronze nails – 31 x 1.8mm	
Authority	Cedar Shake and Shingle Bureau	

The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

\* Laid weights shown are for 'clean' untreated shingles.



# SHAKES

Premier No. 1 Grade Blue Label Western Red Cedar Shake for roofing and cladding.

lowpitch



## TECHNICAL DATA

Length	600mm
Width	75-300mm (random)
Pitch and gauge	20°-74° at 190mm gauge (roof) 75°-90° at 250mm gauge (vertical)
Maximum pitch	90°
Thickness	19mm at the butt, tapering
Covering (bundle)	1.39m² at 190mm gauge (roof) 2.12m² at 250mm gauge (vertical)
Laid weight (approx.)*	9.4kg/m² at 190mm gauge (roof) 6.1kg/m² at 250mm gauge (vertical)
Battens required (net)	5.3 lin.m/m² at 190mm gauge (roof) 3.5 lin.m/m² at 250mm gauge (vertical)
Batten size recommended	38mm x 25mm for rafters/supports not exceeding 450mm centres (fixed to BS 5534) 50mm x 25mm for rafters/supports not exceeding 600mm centres (fixed to BS 5534)
Fixings	Annular Ringshank Stainless steel or silicon bronze nails – 45 x 2.65mm
Authority	Cedar Shake and Shingle Bureau

The minimum recommended pitch and lap may be influenced by special circumstances, please contact the Technical Advisory Service.

\* Laid weights shown are for 'clean' untreated shakes.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help




  
**Marley  
Weatherboard**

Light Grey




FIND OUT MORE  [marley.co.uk](https://marley.co.uk)

# MARLEY WEATHERBOARD

Marley Weatherboard is our exciting range of fibre cement cladding products, offering a beautifully textured woodgrain effect finish with quality and durability that stands the test of time. Weatherboard has all the benefits of timber with none of the worries about rot, maintenance and repainting.



## COLOUR AVAILABILITY



## TECHNICAL DATA

Size of plank	3600mm x 200mm
Thickness	8mm
Fire rating	A2-s1, d0
Lap	30-50mm
Maximum gauge	100mm (roof)
Coverage	1.63 boards per m <sup>2</sup> (max)
Finish	Woodgrain effect
Weight per board	8.6kg

## ADVANTAGES

- ▲ Contemporary and versatile
- ▲ 5 colours available
- ▲ Wider boards provide greater covering capacity (1.63 boards/m<sup>2</sup> at 30mm lap)
- ▲ Simple and economical to install using handheld power tools
- ▲ Meets the durability requirements of BS EN 12467\*
- ▲ BRE fire safety classification A2-s1, d0
- ▲ Compatible for use with rainscreen insulation for improved thermal performance
- ▲ Suitable for residential and commercial applications
- ▲ UL Solutions certified (R41360-1)

## WEATHERBOARD ACCESSORIES


Available in all colours to match the Marley Weatherboard range.




Starter profile




Connection profile




End profile



Internal corner



Asymmetric  
External Corner



Symmetric  
External Corner



Perforated  
closure



Universal  
vapour permeable  
underlay



Colour  
matched  
screw



EPDM  
self-adhesive  
tape (20m roll)



Weatherboard  
touch-up  
paint

\* Fibre-cement flat sheets – product specification and test methods



# Here to help

Getting our knowledge to you and your project smoothly and efficiently

## ▲ CUSTOMER SERVICES

For our trading customers, our knowledgeable and friendly staff are able to offer quotations, expert advice, deal with orders and all other enquiries.

Call 01283 722849

## ▲ TECHNICAL ADVICE

Our Technical Advisory Service is staffed by an experienced team with specialist knowledge.

Call 01283 722330

e-mail [roofing@marley.co.uk](mailto:roofing@marley.co.uk)

## ▲ TECHNICAL TOOLKIT

Tools and assets that make design and specification as straightforward as possible.

### SPECIFICATION TOOLS

Specrite, Estimator and Fixing Spec are online tools designed to give the specifier and installer all the specification and installation help they need:

[marley.co.uk/specrite](http://marley.co.uk/specrite)

[marley.co.uk/estimator](http://marley.co.uk/estimator)

[marley.co.uk/fixingspec](http://marley.co.uk/fixingspec)



## SAMPLES

Experiencing the vast variety of textures and colours that our roof tiles provide up close can guide you in the decision-making process when selecting roof coverings. Our efficient sample service can help you in this process.

[marley.co.uk/samples](http://marley.co.uk/samples)



## TECHNICAL ADVICE

The best roofing systems and product solutions demand the best technical advice and back up. Our experience and knowledge are second to none.

Contact our Technical Advisory Team

**01283 722330**



## NATIONAL COVERAGE

We have experts on hand across the country that understand the local vernacular and can help you design a bespoke roofing system for your project.

Find your local specialist by visiting

[marley.co.uk/contact-us](http://marley.co.uk/contact-us)



## TRAINING & CPDS

We offer a range of online and practical training courses for merchants and installers. Also our RIBA accredited CPD courses provide in-depth knowledge and understanding of key roofing products.

[marley.co.uk/training](http://marley.co.uk/training)

# MINIMUM ORDER QUANTITIES

Clay plain tiles	No. per band	No. of bands per pallet	Qty. per pallet	Min. order qty.
Acme/Hawkins tiles	12	105	1260	per pallet
Acme/Hawkins eaves	15	100	1500	per band
Acme/Hawkins gables	12	63	756	per band
Canterbury handmade tiles	n/a	n/a	860	per pallet
Canterbury handmade eaves	n/a	n/a	860	1
Canterbury handmade gables	n/a	n/a	560	1
Creasing tiles	n/a	n/a	1260	per pallet

## Clay Pantiles

Lincoln pantiles	4	99	396	per pallet
------------------	---	----	-----	------------

## Concrete tiles

Anglia	38	12	456	per pallet
Ashmore	6	46	276	per pallet
Double Roman	32	6	192	per pallet
Edgemere range	40	6	240	per pallet
Ludlow Major	36	6	216	per pallet
Ludlow Plus	43	12	516	per pallet
Mendip range	32	6	192	per pallet
Modern and Duo Modern	32	6	192	per pallet
Plain tiles	10	90	900	per pallet
Plain eaves/top	10	120	1200	per band
Plain tile and half	10	54	540	per band
Wessex	32	6	192	per pallet

## Concrete fittings

Segmental ridge	5	24	120	per pallet
Segmental security ridge	5	24	120	per pallet
Modern ridge	5	28	140	per pallet
Modern security ridge	5	28	140	per pallet
Third round hip ridge	5	28	140	per pallet



Feature tiles	No. per band	Min. order qty.
Ashurst	12	per band
Autumn Brindle	12	per band
Aylesham Mix	12	per band
Burnished	12	per band
Farmhouse Brown	12	per band
Grey Sandfaced	12	per band
Heather Sandfaced	12	per band
Red Sandfaced	12	per band
Red Smooth	12	per band
Staffordshire Blue	12	per band
Weathered	12	per band

Any tile colours not listed are sold loose.

Shingles	No. of bundles per pallet	Min. order qty.
Shakes	20	1 bundle
Shingles	24	1 bundle

Battens*	No. per bundle	No. of bundles per pack	Quantity per pack
19 x 38mm	10	70	700
25 x 38mm	10	56	560
25 x 50mm	10	44	440

\* Order per pack – Min. quantity 10 packs

Weatherboard	Quantity per pallet	Min. order qty.
Black	250	per pallet
Slate Grey	250	per pallet
Light Grey	250	per pallet
Blue Grey	250	per pallet
White	250	per pallet

# MANUFACTURING & STOCKING LOCATIONS

## KEY

Clay plain tiles	Timber
Clay pantiles	Solar
Concrete	Weatherboard

### 1 GLASGOW

Marley Ltd, Kirkintilloch Road, Cadder,  
Bishopbriggs, Glasgow G64 2PY

Open for collections

Mon-Thur: 6:30am - 3:00pm\*

Fri: 6:30am - 2:30pm

### 2 GAINSBOROUGH

Marley Ltd, Old Shipyard, Beckingham,  
Gainsborough DN21 1NG

Open for collections

Mon-Fri: 7:00am - 4:00pm

### 4 BURTON

Marley Ltd, Lichfield Road,  
Branston, Burton upon Trent DE14 3HD

Open for collections

Mon-Thur: 7:00am - 3:00pm

Fri: 7:00am - 2:00pm

### 6 BEENHAM

Marley Ltd, Grange Lane, Bath Road,  
Beenham, Reading RG7 5PU

Open for collections

Mon-Fri: 7:00am - 3:30pm



### 3 KEELE

Marley Ltd, Ridgehill Drive,  
Madeley Heath, Crewe,  
Cheshire CW3 9LY

Open for collections

Mon-Fri: 7:30am - 4:00pm

### 5 BRIDGEND

Marley Ltd, St Mary's Hill,  
Mynydd Ruthin, Bridgend,  
Mid Glamorgan CF35 5DU

Open for collections

Mon-Fri: 8:00am - 4:00pm

### 7 AYLESFORD\*\*

Marley Ltd, Unit 1, Bellingham Way,  
Panattoni Park, Aylesford,  
Kent ME20 7WT

Open for collections

Mon-Fri: 7:30am - 4:00pm

\* Last load accepted at 2.30pm \*\* Collections only

## NOTES

This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.

Updates since October 2024. Removal of discontinued products and addition of new Acme clay tile colour.

Underlay  
and Battens

Solar and  
renewables

Clay plain tiles  
and fittings

Clay paniles  
and fittings

Concrete tiles  
and fittings

Dry fix and  
ventilation

Shingles  
and Shakes

Marley  
Weatherboard

Here to  
Help



## Tell me more

Call 01283 722588  
Email [info@marley.co.uk](mailto:info@marley.co.uk)  
Or visit [marley.co.uk](http://marley.co.uk)

Marley, Lichfield Road, Branston, Burton upon Trent, DE14 3HD

