


Tile Design	
Minimum Pitch	
Maximum Pitch	
Size of Tile	
Minimum Headlap (Max Gauge)	
Tile Thickness Overall Depth	
Cover width	
Covering Capacity (net)	
Weight of Tiling	
Quantity Per Pallet	
Battens Required	
Recommended Batten Size	
Underlay	
Tile Colours Available	

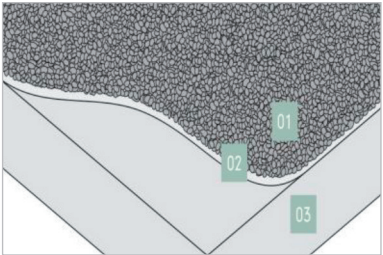

- 01/ Photocatalytic granules stimulated by sunlight to remove NOx
- 02/ Photocatalytic pigmented slurry adhesive
- 03/ Concrete body containing nearly 50% recycled material

Ventilation

Ventilation

Verge

Undercloak – Mortar Bedded

Dry Verge

Eaves

Eaves

Abutment

Abutment	
----------	--

Ridges

Ridge - Dry Fix	
-----------------	--

Ridge - Mortar Bedded	
-----------------------	--

Mono-Ridge – Mortar Bedded	
----------------------------	--

Hips and Valleys

Hip – Mortar Bedded	
Hip – Dry Fix	
Valley	
Other products	

Fixings

Fixing	
Clips	
Nails	

Other

Useful Links

Sustainability

Authority

British Standards

*Some product codes have been published, if you require a code which is not present please contact our Technical Team on 01283 722230

** This publication is based on the latest data available at the time of printing. Due to product changes, improvements and other factors, the Company reserves the right to change or withdraw information contained herein without prior notice. For specific applications users should refer to the Technical Advisory Service and relevant Standards and Codes of Practice for guidance. The photography shown in the document should not necessarily be taken as recommendations of good practice. The printing process restricts the exact representation of colours. For true colour reference, please request product samples.

¹LTSA – The Lead Sheet Training Academy